



Channel.....	page 3
Channel Brackets & Fixings.....	page 17
Cable Tray.....	page 41
Cable Ladder.....	page 61
Pipe Clips.....	page 88
Trunking.....	page 90
Plastic & PVC Trunking.....	page 130
Bench Trunking & Power Poles.....	page 168
Wire Cable Basket.....	page 178
Conduit.....	page 203
Branded Accessories.....	page 206

# CONTENTS

## Materials & Finishes



### Hot Dipped Galvanised HG

Processed in accordance with BS EN ISO 1461: 2009. It is an excellent solution for outdoor environments and has a unique metallurgical structure which gives outstanding resistance to mechanical damage. \*55µm minimum thickness.

### Stainless Steel SS

Stainless steel to 1.4404 (316L) standards. Excellent for marine applications and extreme environmental conditions. Pickle & Passivate is available upon request.

### Zinc Dichromate ZD

Often used for clean rooms, Data Centres and other sterile environments.

### Zinc Plated ZP

An alternative to a Pre Galvanised product and generally used for internal applications. Zinc Plated applications are often used in sterile environments. Electroplated EN 12329.

### Zinc Magnesium ZM

Coated to standard EN10346-2015, Zinc-Aluminium-Magnesium is a coating whose main component is zinc, and the content of aluminium and magnesium is between 1.5-8% (where the magnesium content is not less than 0.2%). Compared with traditional coatings such as Hot-Dip Galvanising and Pre-Galvanised Steel, Zinc-Aluminium-Magnesium coated steels boast better corrosion resistance and self-healing properties. Ideal for extreme environmental conditions or high specification applications.

## Materials & Finishes

### Materials & Finishes

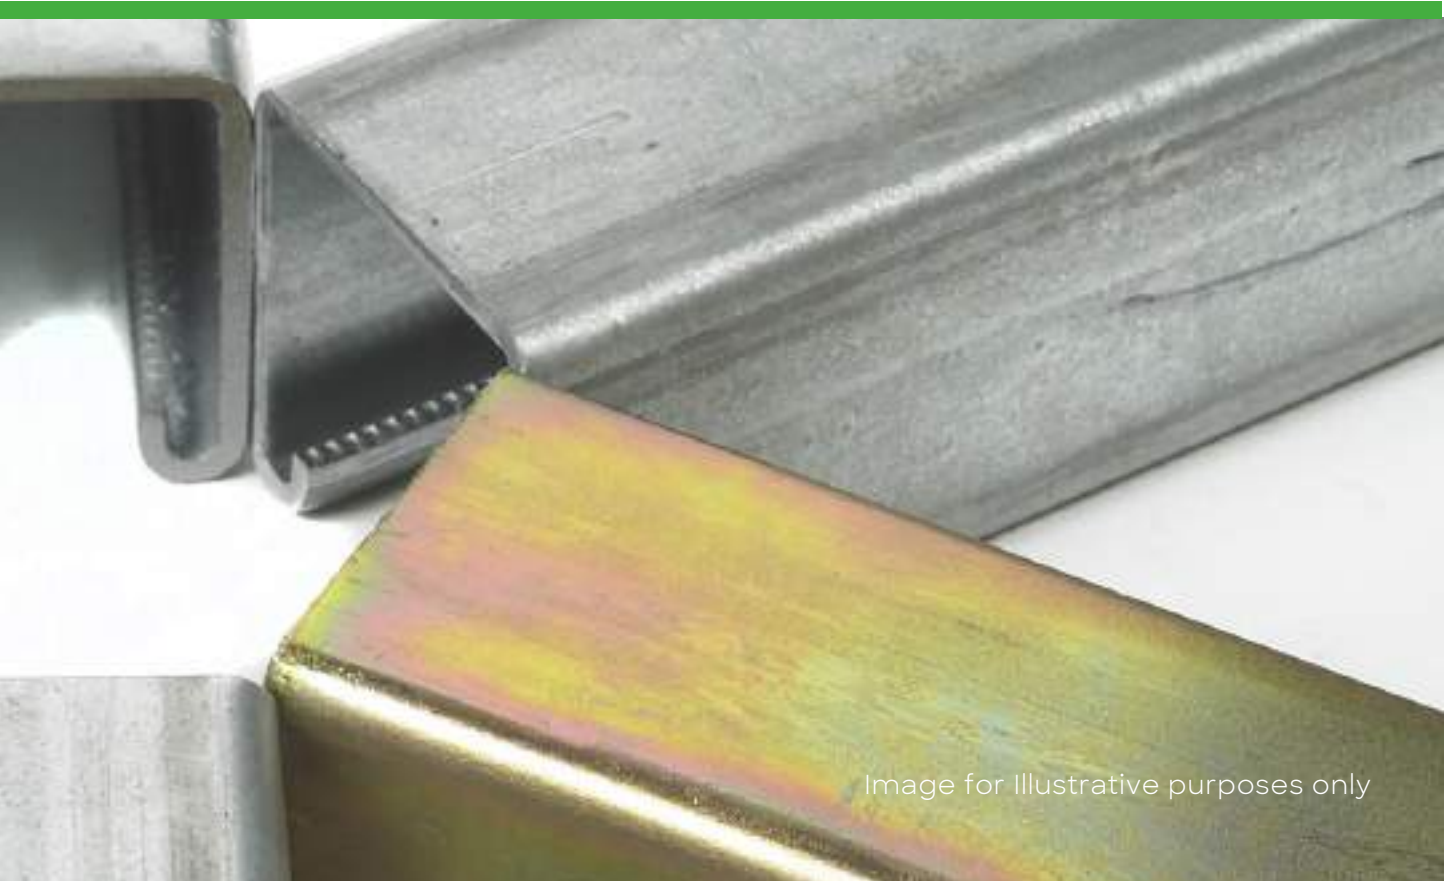


Image for illustrative purposes only

#### Zinc Aluminium\*

Coated to standard EN10346-2015  
Zinc-Aluminium offers excellent coating resistance compared to traditional Zinc coatings. Zinc Aluminium typically offers a coating which is 95% Zn & 5% Al. Perfect for outdoor applications.  
\*ZA available in Steel Wire Cable Tray only.

#### Plain Oil

Plain oil to BS EN 10025 standards. Pickled & Oiled with a min. yield 280 n/mm<sup>2</sup>. Excellent for welding and finishing on site. Ideal base for powder coating and other surface finishes.

#### Pre Galvanised

The most popular finish, generally used for internal applications. Pre Galvanised to Z275- BS EN 10346 1.0244 standards. Supplied with a zinc coating to a nominal coat of 20µm.

#### Deep Galvanised

Processed in accordance with BS EN ISO 1461: 2009 to a greater thickness than the standard Hot Dipped Galvanised, it is an excellent solution for outdoor and harsh environments. \*75 - 85µm minimum thickness.

#### Powder Coated

A variety of powder coating finishes are available. Often used to provide a pleasing aesthetic finish to projects such as shops and retail environments.

#### Deep Galvanised - 120µm+

Extra Deep Galvanised on silicone rich steel to a depth of 120µm+. Please consult the Atkore Unistrut Technical Team for predicted lifespan.



# Materials and Finishes

## INTRODUCTION

Atkore Unistrut channels and fittings offer total flexibility in design and construction of assemblies for framing applications.

Atkore Unistrut products are available in a range of materials and finishes. These finishes offer differing degrees of corrosion protection for use in a variety of environments. Where required, factory decorative finishes are available to order.

## MATERIALS

Channels are cold rolled from 1.5mm and 2.5mm steel strip and are available in:

- PO** PLAIN OILED
- PG** PRE - GALVANISED
- HG** HOT DIP GALVANISED
- DG** DEEP HOT DIP GALVANISED
- SS** STAINLESS STEEL MARINE GRADE
- ZP** ELECTRO ZINC PLATED

Mild steel channels are rolled using material formed from BS EN 10025 with guaranteed yield 280N/mm<sup>2</sup> and minimum ultimate tensile strength of 370N/mm<sup>2</sup>.

Stainless steel channels are rolled using material formed from BS EN10088-2 grade 1.4404 (Grade 316L).

Atkore Unistrut fittings are pressed from hot rolled, pickled and oiled mild steel plate, or strip steel mainly from grade S315MC OR grade S275 mild steel.

Stainless Steel fittings are available to EN10088-2 grade 1.4404 (Grade 316L).

## FINISHES

### Hot -Dip Galvanised

Channels are Hot-Dip Galvanised in accordance with BS EN ISO1461:2009 and chromate passivated.

The minimum average Zinc Coating is as follows:

- Cold Rolled From 1.5mm Steel - 55 microns
- 2.5mm Steel - 55 microns

Fittings spun galvanised - 45 microns

### Pre-Galvanised

Pre-Galvanising is to BS EN 10326 2004 (Coating Z275).

Special coatings and material grades are available on request

### Stainless Steel

- Stainless Steel 1.4404 (316L)
- Cleaned (Pickled & Passivated)

Applying a pickling process to stainless steel results in a clean product and it also removes any heat discolouration that has occurred in the welding process.

### Deep Galvanised

A deep galvanised coating can be achieved when using steel containing a slightly higher proportion of silicon; for example Corten 'A' steel. Silicon bearing steels modify the chemistry of the galvanizing process, resulting in the zinc coating continuing to increase in thickness as long as the steel remains immersed in the zinc. Coatings up to two to three times as thick as the normal standard coating are practical to achieve.

### PVC Coating

PVC coating is a thick coating with good anti-corrosion properties. It gives a generally good chemical resistance to most acidic and alkaline materials. It is not suitable for use with most solvent-based contaminants. PVC coating is suitable for application over Hot-Dip Galvanised Steel.

## Zinc Electroplated

Channel nuts and bolts are zinc electroplated.

## RANGE

Channels are available in plain or slotted (Code T), in multiple channel combinations and all 2.5mm channels have serrated lips. Slots, 14mm wide x 28mm long or 11mm wide x 25mm long, are provided at 50mm nominal centres. Combination channels manufactured from Pre-Galvanised Steel are spot welded, whilst Hot-Dip Galvanised channels are continuously seam welded or spot welded as appropriate.

## LENGTH

Standard channel lengths are 3m or 6m. Cut channel lengths can be supplied.

## WEIGHTS & DIMENSIONS

Weights published in this catalogue for all materials are approximate shipping weights. All dimensions are subject to commercial tolerance variations.

## TORQUE

The torque figures stated in this catalogue are based on using a properly calibrated torque wrench with a clean, dry (non-lubricated) Atkore Unistrut fitting, bolt and nut. A lubricated bolt or nut can cause extremely high tension in the connection and may lead to bolt failure. It must be noted that the accuracy of commercial torque wrenches varies widely and it is the responsibility of the installer to ensure that proper bolt torque has been achieved.

## PERFORMANCE

It should not be assumed that the performance of a Stainless Steel product is similar to that of its mild steel counterpart. Consult your local Technical Sales Manager for further information.

## FITTING APPLICATION

All part drawings illustrate only one application of each fitting. In most cases, many other applications are possible. Load values are based on use of a PNP12 Unistrut nut and M12 bolt unless specified otherwise.

While effort has been made to ensure the accuracy of the information contained in this catalogue at the time of publication, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.


E & O.E. Unistrut Limited has a policy of continuous product development and reserve the right to change specifications without prior notice.

## STANDARDS

The standard requires that products are stamped with BSEN6946:1988 and also the name of the manufacturer. We at Atkore Unistrut show that the standard is achieved by rolling the channel with the part number along with the full name of the Standard BSEN6946:1988, and also our own Atkore Unistrut branding. This is, as it should be, stamped into the Channel to ensure that you can clearly identify our product over the inferior product that is creeping into the market place.


The engraving should also be clearly visible at all times, even when the product has undergone further finishing treatments i.e. Hot Dip Galvanised, Epoxy Coating. Contractors and distributors should be aware of cheap imported and non-standard products that have removable or no product marking at all, as this is not within the standard.

# Unistrut P1000

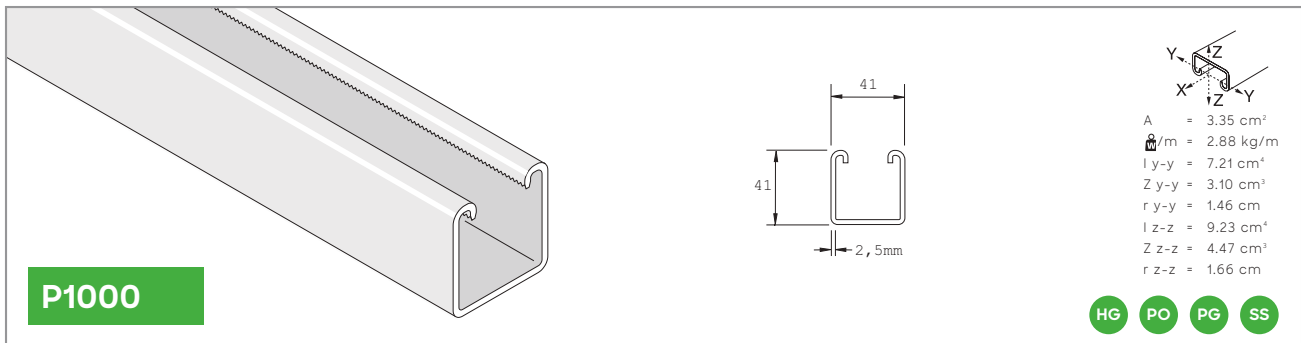

L(mm)	Fmax(kN)	fmax(mm)	F (kN)	F (kN)	F <sub>(ult)</sub>
250	17.354	0.23	-	-	16.608
500	8.672	0.95	-	-	16.187
750	5.778	2.15	-	5.602	15.245
1000	4.336	3.82	-	3.149	13.685
1250	3.463	5.97	-	2.011	12.086
1500	2.884	8.60	2.521	1.393	10.722
1750	2.472	11.70	1.844	1.020	9.575
2000	2.168	15.29	1.413	0.785	8.623
2250	1.923	19.35	1.118	0.618	7.819
2500	1.727	23.89	0.903	0.500	7.112
2750	1.570	28.91	0.746	0.412	6.504*
3000	1.442	34.40	0.628	0.343	5.995*

\*180 ≤ kL/r < 250

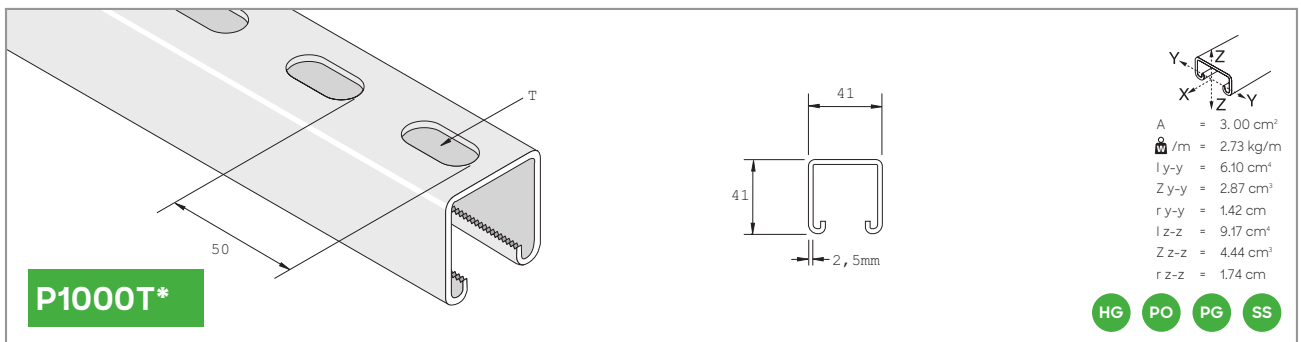

L(mm)	Fmax(kN)	fmax(mm)	F (kN)	F (kN)	F <sub>(ult)</sub>
250	16.069	0.27	-	-	16.283
500	8.034	1.05	-	-	16.039
750	5.356	2.35	-	4.738	15.274
1000	4.012	4.18	-	2.659	13.626
1250	3.208	6.54	3.071	1.707	11.880
1500	2.678	9.41	2.129	1.177	10.418
1750	2.296	12.81	1.560	0.863	9.231
2000	2.001	16.73	1.197	0.657	8.270
2250	1.785	21.18	0.942	0.520	7.465
2500	1.599	26.15	0.765	0.422	6.779
2750	1.452	31.64	0.628	0.343	6.190*
3000	1.334	37.65	0.530	0.294	5.670*


\*180 ≤ kL/r < 250

See page 18 for  
information on our  
Triple Slotted  
Channel



Part No.	Length M		Finish				Slot Size (T)	
	3	6	PO	PG	HG	SS	25x11	28x14
P1000	•	•	•	•	•	•		
P1000T	•	•	•	•	•	•		•
P1000T10	•	•	•	•	•	•	•	

Stated loadings apply to mild steel products only.

# Unistrut P1001

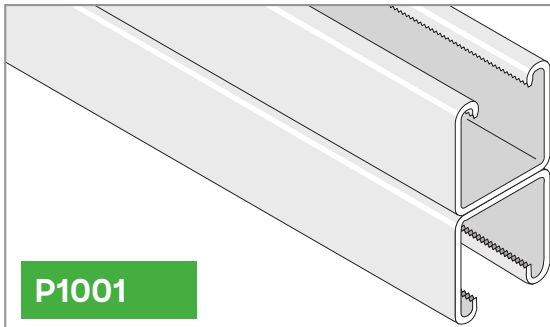

**P1001**



A = 6.70 cm<sup>2</sup>  
 $\rho$ /m = 5.77 kg/m  
 I<sub>y-y</sub> = 36.27 cm<sup>4</sup>  
 Z<sub>y-y</sub> = 8.78 cm<sup>3</sup>  
 r<sub>y-y</sub> = 2.32 cm  
 I<sub>z-z</sub> = 18.46 cm<sup>4</sup>  
 Z<sub>z-z</sub> = 8.94 cm<sup>3</sup>  
 r<sub>z-z</sub> = 1.66 cm

**HG** **PO** **PG** **SS**


L(mm)	F		f=1/200L		f=1/360L	F <sub>(kN)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)		
250	-	-	-	-	-	28.253
500	-	-	-	-	-	28.096
750	16.383	1.21	-	-	-	27.792
1000	12.292	2.15	-	-	-	27.301
1250	9.830	3.36	-	-	-	26.438
1500	8.191	4.84	-	7.044	-	25.025
1750	7.024	6.59	-	5.170	-	23.220
2000	6.141	8.61	-	3.963	-	21.288
2250	5.454	10.89	-	3.129	-	19.394
2500	4.915	13.45	4.562	2.531	-	17.619
2750	4.464	16.27	3.767	2.090	-	15.990
3000	4.091	19.37	3.169	1.756	-	14.519*

**HG** Continuously Seam Welded

**SS** Spot Welded





\*180 ≤ kL/r < 250

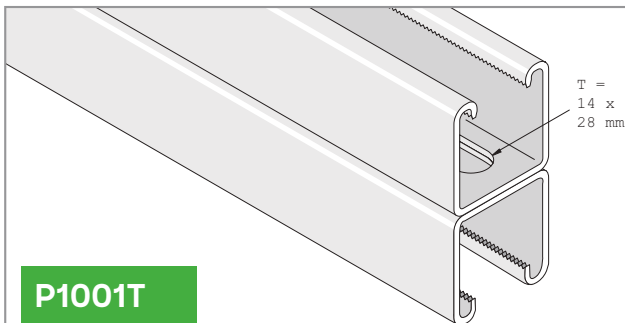

**P1001T**

T =  
14 x  
28 mm



A = 6.00 cm<sup>2</sup>  
 $\rho$ /m = 5.47 kg/m  
 I<sub>y-y</sub> = 36.21 cm<sup>4</sup>  
 Z<sub>y-y</sub> = 8.77 cm<sup>3</sup>  
 r<sub>y-y</sub> = 2.45 cm  
 I<sub>z-z</sub> = 18.34 cm<sup>4</sup>  
 Z<sub>z-z</sub> = 8.88 cm<sup>3</sup>  
 r<sub>z-z</sub> = 1.74 cm

**HG** **PO** **PG** **SS**

L(mm)	F		f=1/200L		f=1/360L	F <sub>(kN)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)		
250	-	-	-	-	-	27.458
500	-	-	-	-	-	27.311
750	16.363	1.21	-	-	-	27.027
1000	12.272	2.15	-	-	-	26.585
1250	9.820	3.36	-	-	-	25.830
1500	8.182	4.84	-	7.034	-	24.584
1750	7.014	6.59	-	5.170	-	22.906
2000	6.131	8.61	-	3.953	-	21.042
2250	5.454	10.90	-	3.120	-	19.198
2500	4.905	13.46	4.552	2.531	-	17.452
2750	4.464	16.28	3.767	2.090	-	15.8520
3000	4.091	19.38	3.159	1.756	-	14.391*

**HG** Continuously Seam Welded

**PO** **PG** **SS** Spot Welded



\*180 ≤ kL/r < 250



Part No.	Length M		Finish				Slot Size (T)	
P1001	3	6	PO	PG	HG	SS	25x11	28x14
P1001T	•	•	•	•	•	•	•	•
P1001T10	•	•	•	•	•	•	•	•

Stated loadings apply to mild steel products only.

# Unistrut P3300



A = 2.32 cm<sup>2</sup>  
 $\rho$ /m = 1.91 kg/m  
 $I_{y-y}$  = 1.19 cm<sup>4</sup>  
 $I_{z-z}$  = 5.34 cm<sup>4</sup>  
 $r_{y-y}$  = 0.71 cm  
 $r_{z-z}$  = 2.59 cm  
 $r_{x-x}$  = 1.51 cm

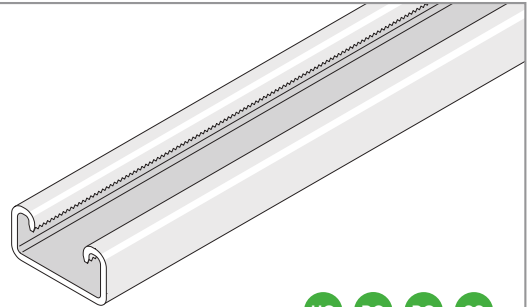


**P3300**


HG PO PG SS

L(mm)	F		$f = 1/200L$	$f = 1/360L$	$F_{(kN)}$
	$F_{max}(kN)$	$f_{max}(mm)$	F (kN)	F (kN)	
250	5.425	0.45	-	-	10.222
500	2.708	1.81	-	2.080	9.761
750	1.805	4.07	1.658	0.922	8.427
1000	1.354	7.24	0.932	0.520	6.769
1250	1.079	11.32	0.598	0.324	5.376
1500	0.903	16.30	0.412	0.226	4.287*
1750	0.775	22.19	0.304	-	3.463*
2000	0.677	28.99	0.226	-	-


\*180 ≤ kL/r < 250



A = 2.075 cm<sup>2</sup>  
 $\rho$ /m = 1.76 kg/m  
 $I_{y-y}$  = 1.04 cm<sup>4</sup>  
 $I_{z-z}$  = 0.92 cm<sup>4</sup>  
 $r_{y-y}$  = 0.71 cm  
 $r_{z-z}$  = 5.32 cm  
 $r_{x-x}$  = 2.57 cm  
 $r_{x-x}$  = 1.61 cm



T = 11 x 25 mm

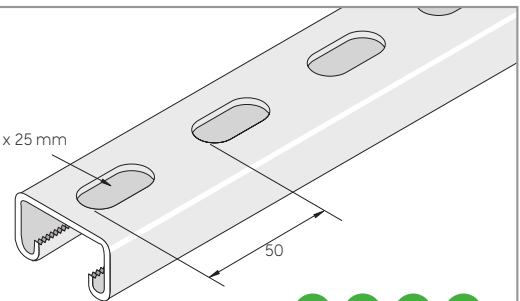

**P3300T10**

HG PO PG SS


L(mm)	F		$f = 1/200L$	$f = 1/360L$	$F_{(kN)}$
	$F_{max}(kN)$	$f_{max}(mm)$	F (kN)	F (kN)	
250	5.152	0.49	-	-	-
500	2.576	1.97	-	1.819	-
750	1.717	4.42	1.455	0.809	-
1000	1.288	7.87	0.819	0.455	-
1250	1.030	12.29	0.524	0.291	-
1500	0.859	17.70	0.364	-	-
1750	0.736	24.09	0.267	-	-
2000	0.644	31.46	-	-	-

Part No.	Length M		Finish			
	3	6	PO	PG	HG	SS
P3300	•	•	•	•	•	•
P3300T10	•	•	•	•	•	•


**Atkore**  
Unistrut


Stated loadings apply to mild steel products only.

## Unistrut P3301

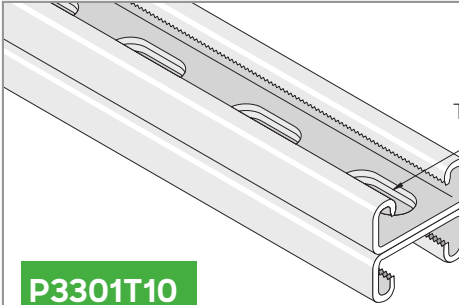

T=14mm x 28mm





$A = 4.09 \text{ cm}^2$   
 $\rho/m = 3.53 \text{ kg/m}$   
 $I_{y-y} = 6.42 \text{ cm}^4$   
 $Z_{y-y} = 2.97 \text{ cm}^3$   
 $r_{y-y} = 1.25 \text{ cm}$   
 $I_{z-z} = 10.64 \text{ cm}^4$   
 $Z_{z-z} = 5.14 \text{ cm}^3$   
 $r_{z-z} = 1.61 \text{ cm}$

P3301T10

HG

PO

PG

SS

L(mm)	F		f=1/200L		f=1/360L	F <sub>(40)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)		
250	16.632	0.26	-	-		17.266
500	8.316	1.03	-	-		17.030
750	5.544	2.31	-	4.991		16.599
1000	4.158	4.11	-	2.808		15.667
1250	3.326	6.43	3.234	1.797		14.156
1500	2.772	9.26	2.246	1.248		12.478
1750	2.376	12.60	1.650	0.917		10.899
2000	2.079	16.45	1.263	0.702		9.496
2250	1.848	20.83	0.998	0.555		8.289*
2500	1.663	25.71	0.809	0.449		7.250*
2750	1.512	31.11	0.668	0.371		6.377*
3000	1.386	37.02	0.562	0.312		-

HG


PO

PG

SS

Continuously Seam Welded

Spot Welded





\*180 ≤ kL/r < 250

Part No.	Length M		Finish			
	3	6	PO	PG	HG	SS
P3301T10	•	•	•	•	•	•

Stated loadings apply to mild steel products only.

## Triple T (TTT)

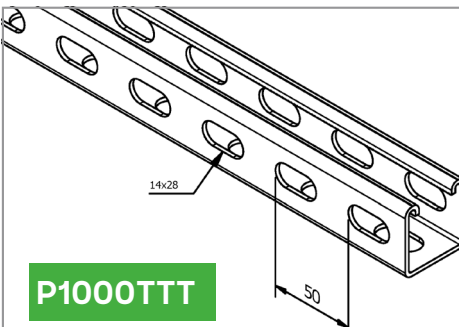



- Triple Slotted Design
- Multiple Fixing Points
- Quick On-Site Configuration

P1000TTT

PG

HG

SS


L(mm)	F		f=1/200L		f=1/360L	F <sub>(40)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)		
250	15.266	0.27	-	-		15.426
500	7.632	1.05	-	-		15.237
750	5.088	2.35	-	4.738		14.510
1000	3.811	4.18	-	2.659		12.945
1250	3.048	6.54	3.071	1.707		11.286
1500	2.544	9.41	2.129	1.177		9.897
1750	2.181	12.81	1.560	0.863		8.769
2000	1.901	16.73	1.197	0.657		7.857
2250	1.696	21.18	0.942	0.520		7.092
2500	1.519	26.15	0.765	0.422		6.440
2750	1.379	31.64	0.628	0.343		5.881
3000	1.267	37.65	0.530	0.294		5.387

Triple T is also available in C41 & Back-to-Back on request.

Contact our team today for more information.



## Unistrut P2000 & P4000

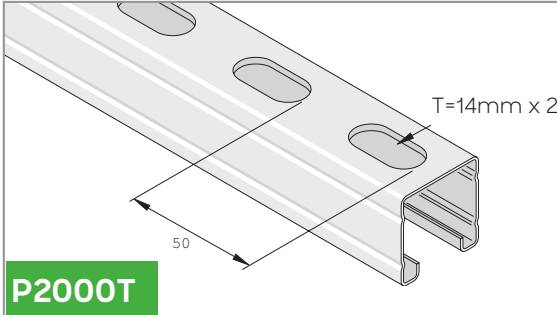

**P2000T**


Y  
X Z  
Y

A = 1.92 cm<sup>2</sup>  
 $\rho$ /m = 1.72 kg/m  
 I y-y = 4.24 cm<sup>4</sup>  
 Z y-y = 2.04 cm<sup>3</sup>  
 r y-y = 1.48 cm  
 I z-z = 6.10 cm<sup>4</sup>  
 Z z-z = 2.95 cm<sup>3</sup>  
 r z-z = 1.78 cm

**HG PO PG**

\* K. L / r = >180 < 250

L(mm)	F		f=1/200L	f=1/360L	F <sub>(eq)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)	
250	11.42	0.26	-	-	11.35
500	5.71	1.06	-	-	10.87
750	3.81	2.40	-	3.30	10.65
1000	2.85	4.27	*-	1.85	9.30
1250	2.28	6.68	2.13	1.18	7.79
1500	1.90	9.62	1.48	0.82	6.54
1750	1.63	13.10	1.09	0.60	5.55
2000	1.42	17.11	0.83	0.46	4.78
2250	1.27	21.65	0.66	0.36	4.17
2500	1.14	26.73	0.53	0.29	3.69
2750	1.03	32.35	0.43	0.24	3.30*
3000	0.95	38.50	0.36	0.21	3.05*

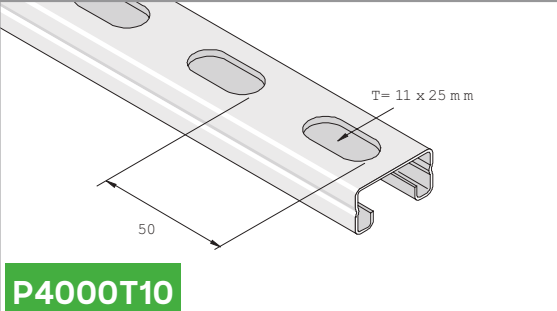

**P4000T10**

Y  
X Z  
Y

A = 1.34 cm<sup>2</sup>  
 $\rho$ /m = 1.16 kg/m  
 I y-y = 0.78 cm<sup>4</sup>  
 Z y-y = 0.71 cm<sup>3</sup>  
 r y-y = 0.76 cm  
 I z-z = 3.66 cm<sup>4</sup>  
 Z z-z = 1.77 cm<sup>3</sup>  
 r z-z = 1.65 cm

**HG PO PG**


L(mm)	F		f=1/200L	f=1/360L	F <sub>(eq)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)	
250	3.976	0.51	-	-	-
500	1.988	2.02	-	1.364	-
750	1.325	4.55	1.092	0.606	-
1000	0.994	8.09	0.614	0.341	-
1250	0.795	12.65	0.393	0.218	-
1500	0.663	18.21	0.273	-	-
1750	0.568	24.79	-	-	-
2000	0.497	32.38	-	-	-

Part No.	Length M		Finish		
P2000T	3	6	PO	PG	HG
P4000T10	•	•	•	•	•



**Atkore™**  
Unistrut

Stated loadings apply to mild steel products only.

## Unistrut P5000



$A = 5.06 \text{ cm}^2$   
 $\rho/m = 4.05 \text{ kg/m}$   
 $I_{y-y} = 37.76 \text{ cm}^4$   
 $I_{z-z} = 9.01 \text{ cm}^4$   
 $r_{y-y} = 2.72 \text{ cm}$   
 $r_{z-z} = 1.82 \text{ cm}$

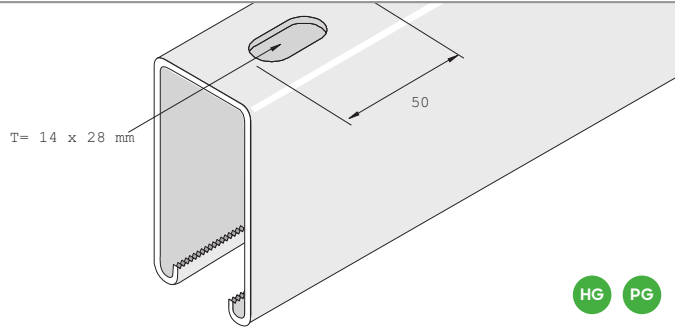


HG PG



### P5000T

L(mm)	F		f		F <sub>(0)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)	
250	-	-	-	-	19.620
500	-	-	-	-	19.355
750	12.596	0.89	-	-	16.422
1000	9.447	1.59	-	-	12.822
1250	7.554	2.48	-	-	10.124
1500	6.298	3.58	-	-	8.182
1750	5.396	4.86	-	-	6.769
2000	4.719	6.36	-	4.120	5.719
2250	4.199	8.05	-	3.257	4.934
2500	3.777	9.93	-	2.639	4.326
2750	3.434	12.02	-	2.178	3.846
3000	3.149	14.31	-	1.834	3.453

Unslotted version available on request.



$A = 10.12 \text{ cm}^2$   
 $\rho/m = 8.11 \text{ kg/m}$   
 $I_{y-y} = 243.16 \text{ cm}^4$   
 $I_{z-z} = 29.44 \text{ cm}^4$   
 $r_{y-y} = 4.90 \text{ cm}$   
 $r_{z-z} = 1.83 \text{ cm}$

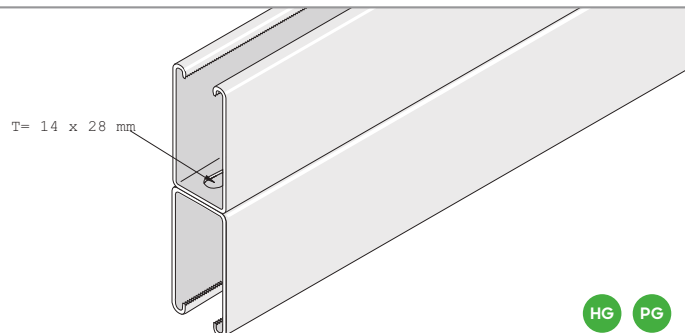

HG PG

### P5001T

L(mm)	F		f		F <sub>(0)</sub>
	F <sub>max</sub> (kN)	f <sub>max</sub> (mm)	F (kN)	F (kN)	
250	-	-	-	-	34.266
500	-	-	-	-	34.129
750	-	-	-	-	33.825
1000	-	-	-	-	33.432
1250	24.535	1.25	-	-	32.864
1500	20.444	1.80	-	-	32.010
1750	17.521	2.45	-	-	30.764
2000	15.333	3.20	-	-	29.165
2250	13.626	4.05	-	-	27.350
2500	12.263	5.00	-	-	25.467
2750	11.154	6.05	-	-	23.613
3000	10.222	7.21	-	-	21.847

HG PG Spot Welded




Part No.	Length M		Finish	
P5000T	3	6	PG	HG
P5001T	•	•	•	•


**Atkore**  
Unistrut


Stated loadings apply to mild steel products only.



## Unistrut P5500

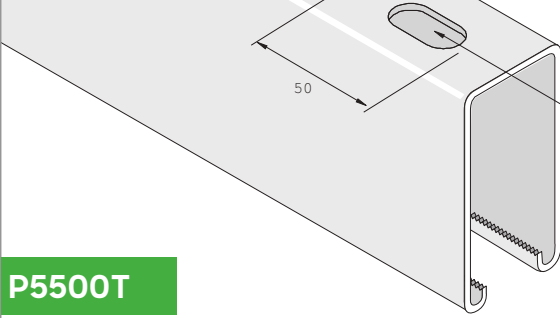







$A = 4.03 \text{ cm}^2$   
 $\Delta/m = 3.60 \text{ kg/m}$   
 $I_{y-y} = 17.57 \text{ cm}^4$   
 $Z_{y-y} = 5.59 \text{ cm}^3$   
 $r_{y-y} = 2.09 \text{ cm}$   
 $I_{z-z} = 13.07 \text{ cm}^4$   
 $Z_{z-z} = 6.33 \text{ cm}^3$   
 $r_{z-z} = 1.79 \text{ cm}$


**P5500T**

HG
PG

L(mm)	F		$f = 1/200L$	$f = 1/360L$	$F_{(90)}$
	$F_{max}(kN)$	$f_{max}(mm)$	F (kN)	F (kN)	
250	-	-	-	-	20.277
500	-	-	-	-	20.081
750	9.928	1.50	-	-	18.443
1000	7.446	2.67	-	-	15.245
1250	5.955	4.18	-	4.944	12.557
1500	4.964	6.02	-	3.434	10.507
1750	4.248	8.19	-	2.521	8.966
2000	3.718	10.70	3.473	1.923	7.789
2250	3.306	13.55	2.747	1.521	6.867
2500	2.972	16.73	2.217	1.236	6.141
2750	2.708	20.24	1.834	1.020	5.543
3000	2.482	24.09	1.540	0.853	5.042








$A = 8.06 \text{ cm}^2$   
 $\Delta/m = 7.21 \text{ kg/m}$   
 $I_{y-y} = 109.74 \text{ cm}^4$   
 $Z_{y-y} = 17.70 \text{ cm}^3$   
 $r_{y-y} = 3.69 \text{ cm}$   
 $I_{z-z} = 26.14 \text{ cm}^4$   
 $Z_{z-z} = 12.66 \text{ cm}^3$   
 $r_{z-z} = 1.80 \text{ cm}$

**P5501T**

HG
PG

HG
PG
Spot Welded


L(mm)	F		$f = 1/200L$	$f = 1/360L$	$F_{(90)}$
	$F_{max}(kN)$	$f_{max}(mm)$	F (kN)	F (kN)	
250	-	-	-	-	34.747
500	-	-	-	-	34.590
750	-	-	-	-	34.257
1000	-	-	-	-	33.766
1250	-	-	-	-	32.971
1500	15.745	3.07	-	-	31.677
1750	13.499	4.18	-	-	29.822
2000	11.811	5.47	-	-	27.674
2250	10.497	6.92	-	9.476	25.457
2500	9.477	8.54	-	7.671	23.299
2750	8.584	10.34	-	6.337	21.288
3000	7.868	12.30	-	5.327	19.443


**Atkore™**  
**Unistrut**

Part No.	Length M		Finish	
	3	6	PG	HG
P5500T	•	•	•	•
P5501T		•	•	•


Stated loadings apply to mild steel products only.

## Unistrut P1000 Special Channels

P1000 Special Channels require a minimum order quantity

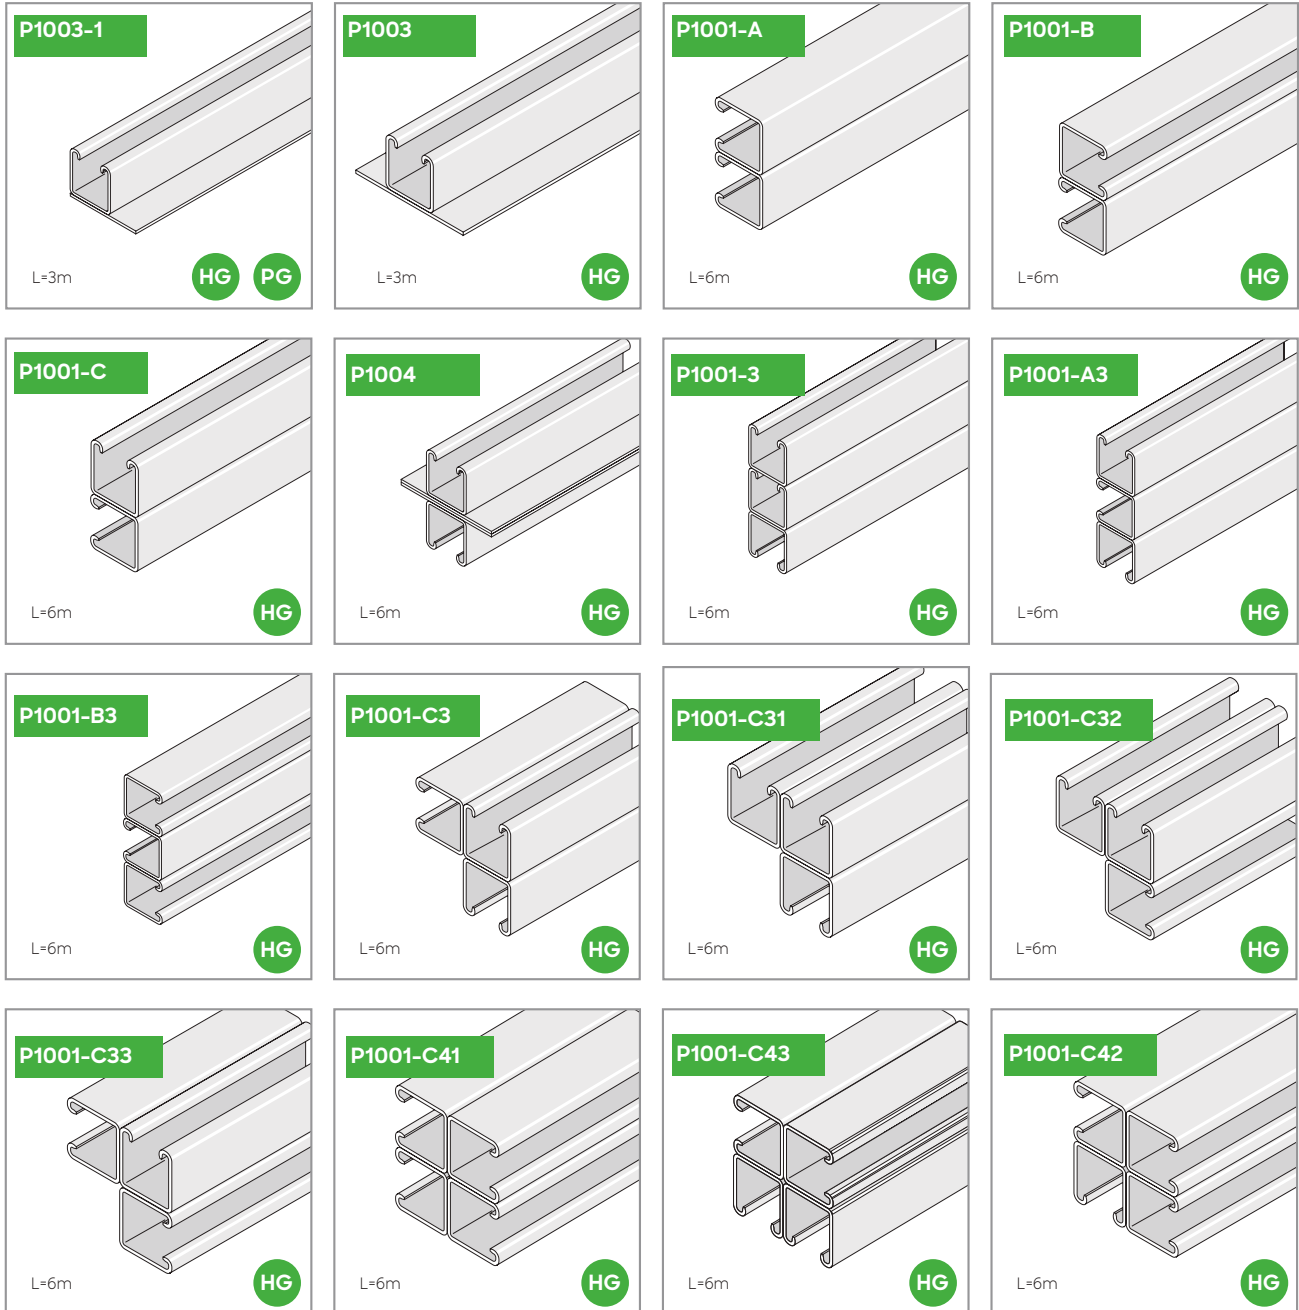

## Concrete Inserts

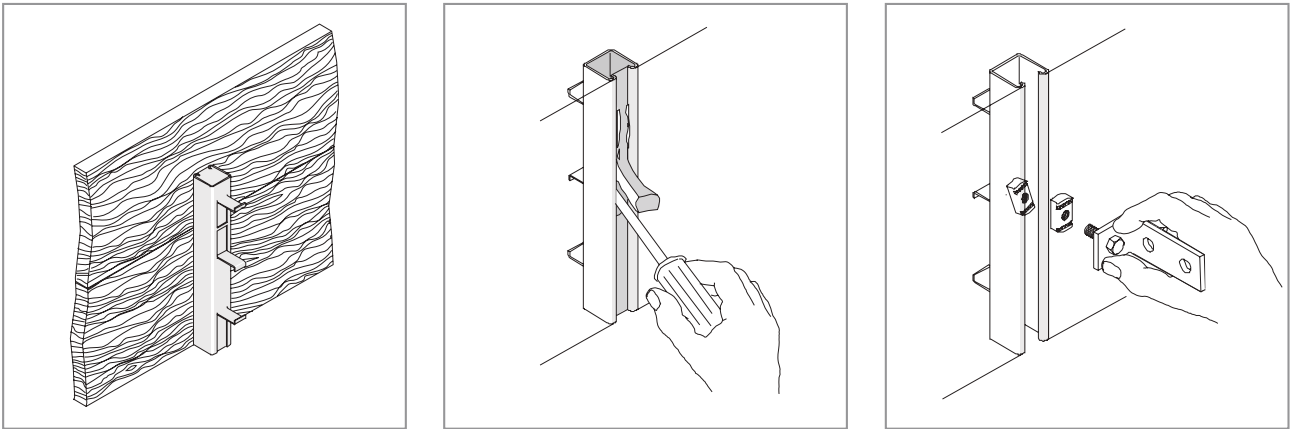


### Concrete Inserts

Atkore Unistrut concrete inserts are manufactured from standard Unistrut channel and may be installed in floors, walls, or ceilings for the support of all types of piping, conduit, cable support, and other industrial equipment.

Channel nuts can be positioned anywhere along the length of the channel, providing a means of attaching fittings or rods where required.

Atkore Unistrut inserts are available pre-filled with an easily removable foam to prevent the ingress of grout and cement.

Concrete inserts can be supplied in Pre Galvanised, Hot-Dip Galvanised and Stainless Steel finishes.

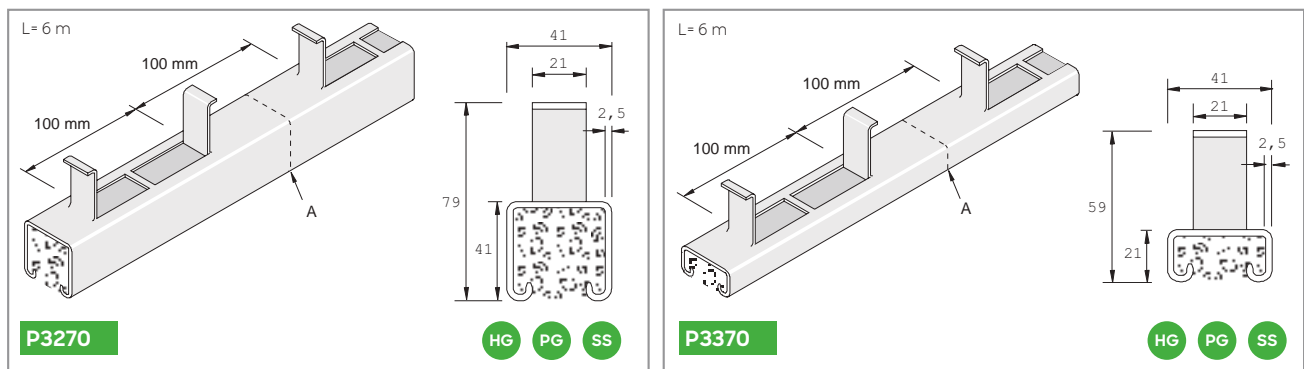

P3270 inserts are designed to accommodate M6, M8, M10, M12 & M16 fixings. Cutting positions are located between lugs as indicated (A) in increments of 200mm.

The recommended loading in average strength concrete\* with a safety factor of 3, is:

Part No.	Pullout	Length
P3270	8.8kN	300mm

\*B = 25 N/mm<sup>2</sup>

Stated loadings apply to mild steel products only.

P3370 inserts are designed to accommodate M6, M8, M10 & M12 fixings. Cutting positions are located between lugs as indicated (A) in increments of 200mm.


The recommended loading in average strength concrete\* with a safety factor of 3, is:

Part No.	Pullout	Length
P3370	6.7kN	300mm

\*B = 25 N/mm<sup>2</sup>

## Unistrut Channel Nuts


Suitable for P1000, P2000 & P3270




PNL06-PNL12A

HG SS ZP

Part No.	Finish			Thread Size	W /100	
	ZP	HG	SS			
PNL06	-	-	-	M6	3.26	100
PNL08	-	-	-	M8	3.53	100
PNL10	-	-	-	M10	3.95	100
PNL12	-	-	-	M12	4.78	100
PNL12A	-	-	-	M12	3.43	100

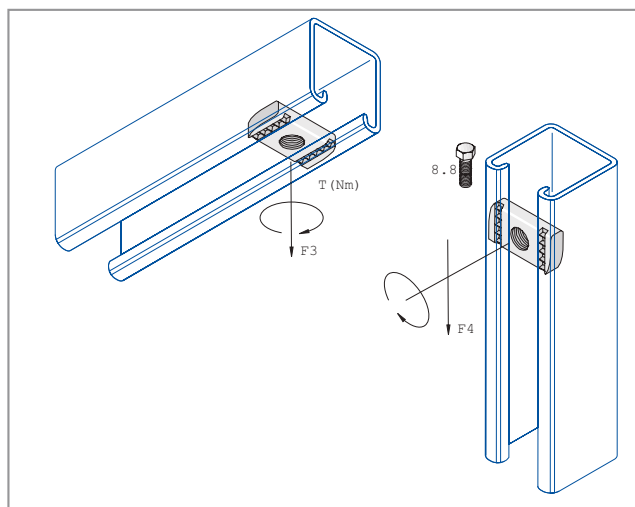

Suitable for P3300, P4000 & P3370




PNS06-PNS12A

HG SS ZP

Part No.	Finish			Thread Size	W /100	
	ZP	HG	SS			
PNS06	-	-	-	M6	3.1	100
PNS08	-	-	-	M8	3.5	100
PNS10	-	-	-	M10	3.9	100
PNS12A	-	-	-	M12	3.6	100

	Part No. ZP	T (Nm)	F3 kN
P1000	PNP06	12	4.20
	PNP08	28	4.70
	PNP10	55	6.00
	PNP12	70	8.00
	PNP16	125	10.30
41			
P3300	PNS06	12	4.20
	PNS08	28	4.70
	PNS10	55	6.00
	PNS12A	60	6.00
21			
P4000	PNL06	12	4.20
	PNL08	28	4.70
	PNL10	40	6.00
	PNL12A	60	8.00
41			

Suitable for P1000, P2000, P3300,  
P4000, P5000, P5500, P3270 & P3370



PNP06-PNP12A

HG SS ZP

Part No.	Finish			Thread Size	W /100	
	ZP	HG	SS			
PNP06	-	-	-	M6	3.10	100
PNP08	-	-	-	M8	3.40	100
PNP10	-	-	-	M10	3.80	100
PNP12*	-	-	-	M12	4.68	100
PNP12A	-	-	-	M12	3.43	100


	Part No. SS	T (Nm)	F3 kN
P1000	PNP06	6.5	2.20
	PNP08	16	3.97
	PNP10	31.5	6.00
	PNP12A	55	6.00
41			
P3300	PNP06	6.5	2.45
	PNP08	16	4.41
	PNP10	31.5	6.86
	PNP12A	55	6.86
21			

Contact our technical team today for further information.

Please note: Channel Nuts can also be used with Unistrut's Slotted Channel.

\* PNP12 is not suitable for Unistrut channels P3300, P4000 & P3370

Suitable for P1000, P5000, P5500 & P3270



PNP16

ZP

Part No.	Finish ZP	Thread Size	W /100	
PNP16*	-	M16	8.00	100

**Atkore™**  
Unistrut

## Unistrut Stud Nuts




Part No.	Finish ZP	L	
M6X30SN	-	18.5mm	100

Part No.	Finish		L	
	ZP	SS		
M8X30SN	-	-	15.5mm	100
M8X40SN	-	-	25.5mm	100
M8X50SN	-	-	35.5mm	100
M8X60SN	-	-	45.5mm	100
M8X75SN	-	-	60.5mm	100
M8X100SN	-	-	85.5mm	100

Part No.	Finish		L	
	ZP	SS		
M10X30SN	-	-	13mm	100
M10X40SN	-	-	23mm	100
M10X50SN	-	-	33mm	100
M10X60SN	-	-	43mm	100
M10X75SN	-	-	68mm	100
M10X100SN	-	-	83mm	100

Part No.	Finish		L	
	ZP	SS		
M12X30SN	-	-	11mm	100
M12X40SN	-	-	21mm	100
M12X50SN	-	-	31mm	100
M12X60SN	-	-	41mm	100
M12X75SN	-	-	56mm	100
M12X100SN	-	-	81mm	100

Part No.	Finish ZP	L	
M16X63SN*	-	40mm	100
M16X102SN*	-	79mm	100

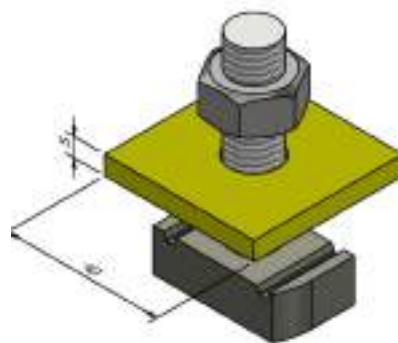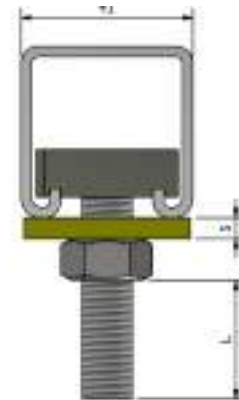

SN

SS


ZP

\* Hot forged

Metal Framing

TM


## Unistrut Flat Fittings



**P1019 / P1020**

HG SS


Part No.	Finish		(mm)			
	HG	SS				
P1019	-	-	9	M6/M8	0.06	100
P1020	-	-	13	M10/M12	0.06	100



**P1063/06 - P1063/12**

HG SS


Part No.	Finish		(mm)			
	PG	SS				
P1063/06	-	-	8	M6	0.02	200
P1063/08	-	-	10	M8	0.02	200
P1063/10	-	-	12	M10	0.02	200
P1063/12	-	-	14	M12	0.02	200



**P1065**

HG SS

Part No.	Finish		(mm)		
	HG	SS			
P1065	-	-	8	0.17	20




**P1066**

HG SS

Part No.	Finish				
	HG	SS			
P1066	-	-	0.25		20


\*Not Structural Coupler



**P1067**

HG SS

Part No.	Finish				
	HG	SS			
P1067	-	-	0.35		20




**P1941**

HG SS<sup>TM</sup>

Part No.	Finish				
	HG	SS			
P1941	-	-	0.43		20


# Unistrut Flat Fittings



**P1062T/P1064T**

PG


Part No.	Finish	(mm)		W /100	
P1062T	PG	8	M6	3.0	100
P1062AT	-	10	M8	3.0	100
P1063T	-	12	M10	3.0	100
P1064T	-	14	M12	3.0	100



**P2322**

HG


Part No.	Finish		
P2322	HG	0.34	25



**P1036**

HG SS


Part No.	Finish		
P1036	HG SS	0.26	25



**P1031**

HG SS


Part No.	Finish		
P1031	HG SS	0.36	25



**P1358**

HG SS

Part No.	Finish		
P1358	HG SS	0.48	10




**P1580**

HG SS

Part No.	Finish		
P1580	HG SS	0.37	10




## Unistrut Angle Fittings



**P1546, P2095 & P2097**

HG SS


Part No.	Finish		A°	W	
	HG	SS			
P1546	-	-	45°	0.26	10
P2097	-	-	60°	0.26	10
P2095	-	-	75°	0.26	10



**P2101 - P2103**

HG


Part No.	Finish		A°	W	
	HG				
P2101	-	-	30°	0.26	10
P2103	-	-	15°	0.26	10



**P1186, P2106 & P2108**

HG SS


Part No.	Finish		A°	W	
	HG	SS			
P1186	-	-	45°	0.26	20
P2106	-	-	75°	0.26	10
P2108	-	-	60°	0.26	20



**P2815S**

ZP


Part No.	Finish		W	
	ZP			
P2815S	-	-	1.53	10



**P1354**

ZP

Part No.	Finish		W	
	ZP			
P1354	-	-	0.55	20




**P1074**

HG SS

Part No.	Finish		W	
	HG	SS		
P1074	-	-	0.35	20


# Unistrut Angle Fittings



**P1026-S1**

ZP


Part No.	Finish	W	
P1026-S1	ZP	0.07	100



**P1026**

HG SS


Part No.	Finish	W	
P1026	HG SS	0.17	100



**P1033**

HG SS


Part No.	Finish	W	
P1033	HG SS	0.36	25



**P1068**

HG SS


Part No.	Finish	W	
P1068	HG SS	0.17	25

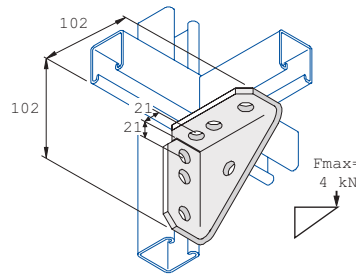

**P2484**

HG SS


Part No.	Finish	W	
P2484	HG SS	0.61	10



**P1326**

HG SS

Part No.	Finish	W	
P1326	HG SS	0.26	25



**P1325**


HG SS

Part No.	Finish	W	
P1325	HG SS	0.35	25

Stated loadings apply to mild steel products only.

**Atkore**  
Unistrut


## 90° Angle Fittings



**P1346**

HG SS


Part No.	Finish		W	
P1346	HG	SS	0.26	20



**P1037**

HG SS


Part No.	Finish		W	
P1037	HG	SS	0.26	10



**P1458**

HG SS


Part No.	Finish		W	
P1458	HG	SS	0.26	10



**P1038**

HG


Part No.	Finish		W	
P1038	HG		0.26	10



**P1278**

HG SS


Part No.	Finish		W	
P1278	HG	SS	0.26	20



**P1359**

HG SS

Part No.	Finish		W	
P1359	HG	SS	0.48	10




**P1727**

HG SS


Part No.	Finish		W	
P1727	HG	SS	0.70	10

Stated loadings apply to mild steel products only.


# Base Fittings & Wing Fittings

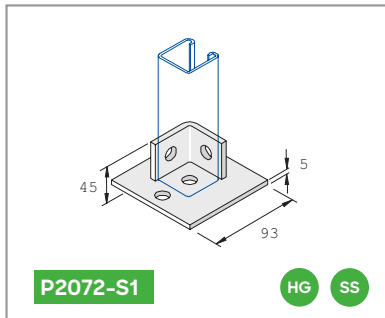


Part No.	Finish	W	
P2072-S1	HG	SS	0.48

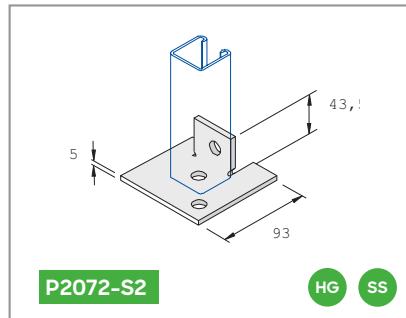


Part No.	Finish	W	
P2072-S2	HG	SS	0.33

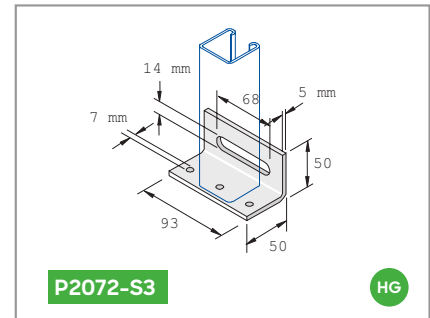


Part No.	Finish	W	
P2072-S3	HG	SS	0.30

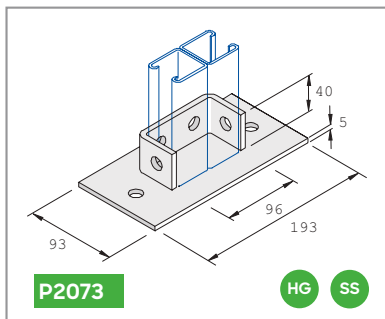


Part No.	Finish	W	
P2073	HG	SS	0.98

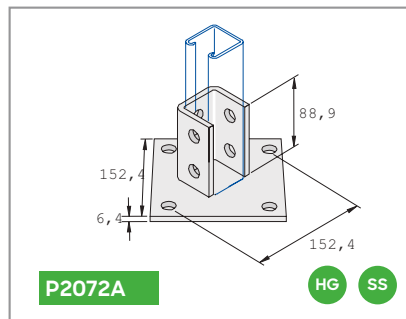


Part No.	Finish	W	
P2072A	HG	SS	1.70

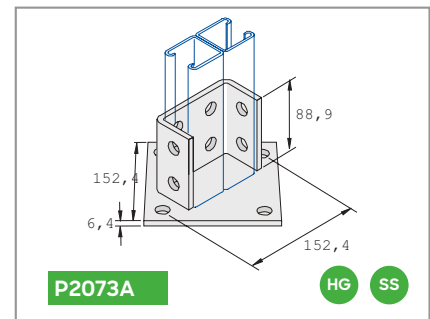


Part No.	Finish	W	
P2073A	HG	SS	1.80

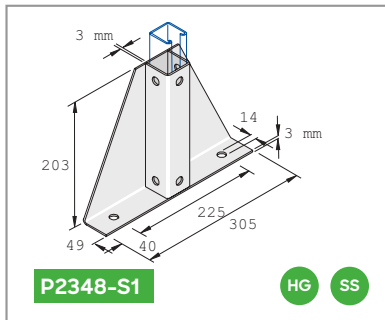


Part No.	Finish	W	
P2348-S1	HG	SS	1.95

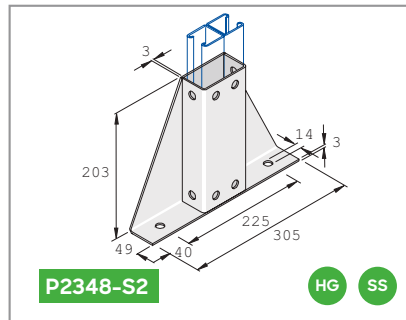


Part No.	Finish	W	
P2348-S2	HG	SS	2.15

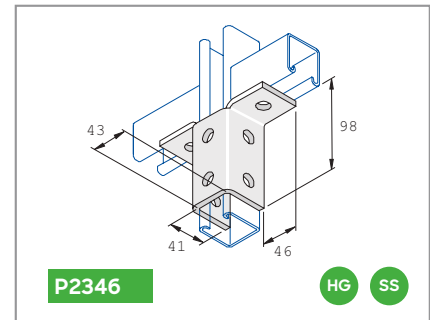


Part No.	Finish	W	
P2346	HG	SS	0.68

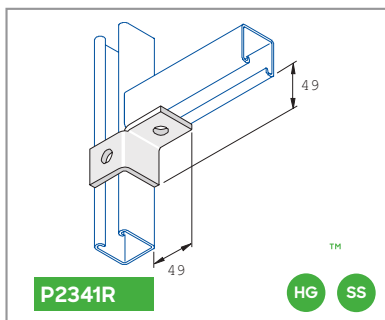

Part No.	Finish	W	
P2341R	HG	SS	0.21

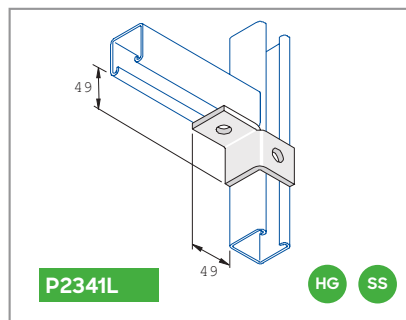


Part No.	Finish	W	
P2341L	HG	SS	0.21

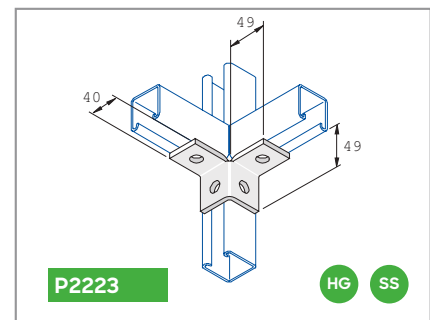

Part No.	Finish	W	
P2223	HG	SS	0.35


## U & Z Fittings



**P4047**

HG SS


Part No.	Finish			
	HG	SS	W	
P4047	-	-	0.32	10



**P1047**

HG SS


Part No.	Finish			
	HG	SS	W	
P1047	-	-	0.40	10



**P1737**

HG SS


Part No.	Finish			
	HG	SS	W	
P1737	-	-	0.58	10



**P1043**

HG SS


Part No.	Finish			
	HG	SS	W	
P1043	-	-	0.48	20



**P4045**

HG SS

Part No.	Finish			
	HG	SS	W	
P4045	-	-	0.21	20




**P1045**

HG SS

Part No.	Finish			
	HG	SS	W	
P1045	-	-	0.25	20


# U & Z Fittings & Channel Couplers



**P1453**

HG SS


Part No.	Finish	W	
P1453	HG SS	0.32	25



**P1347**

HG SS

Part No.	Finish	W	
P1347	HG SS	0.25	25

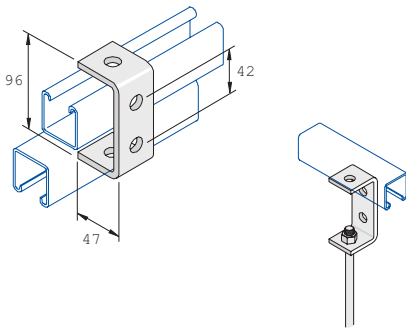


**P1044**

HG SS

Part No.	Finish	W	
P1044	HG SS	0.32	25


Recommended for continuous beam



**P1377**

HG SS

Part No.	Finish	W	
P1377	HG SS	1.20	10



**P1218**


PG SS

Part No.	Finish	W	
P1218	PG SS	0.56	10

**Atkore**  
Unistrut

## Beam Clamps

\* Used in pair

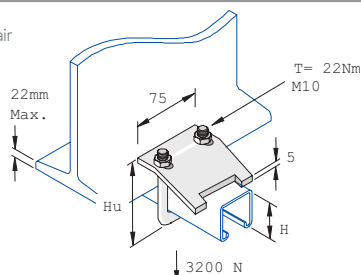


Loadings are per beam clamp and used in pairs.  
Mild steel u bolts are zinc plated.

**P2785 - P2787**

HG SS

Part No.	Finish	H (mm)	Hu (mm)	W	
P2785	-	21-41	86	0.31	20
P2786	-	62-83	127	0.35	20
P2787	-	124-164	209	0.43	20

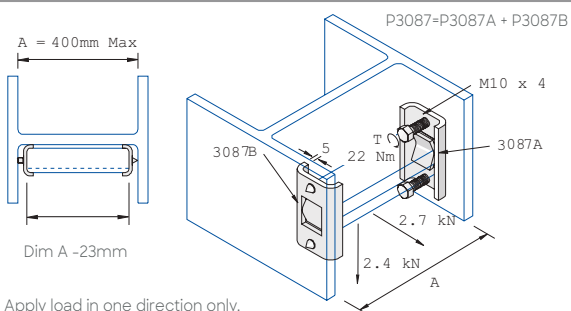


Apply load in one direction only.  
Mild steel cone pointed screws are zinc plated.

**P3087**

HG SS


Part No.	Finish	W	
P3087	-	0.67	10

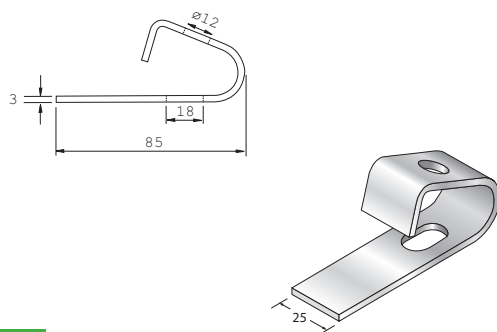

**Z10**

ZP


Part No.	Finish	W	
Z10	ZP	0.06	10



**P1983**

HG SS

Part No.	Finish	W	
P1983	-	0.39	10




**P1386-S1**

ZP

Part No.	Finish	W	
P1386-S1	ZP		20

\* Used in pair

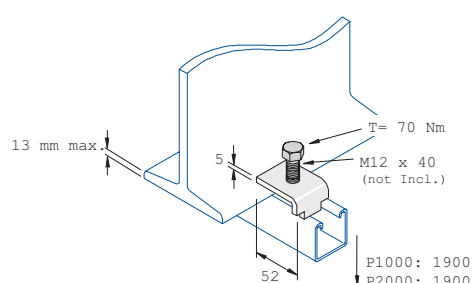

**P1386**

HG SS

Part No.	Finish	W	
P1386	-	0.042	20

Stated loadings apply to mild steel products only.



# Beam Clamps

\* Used in pair

T= 12 Nm  
M12 x 40

22 mm max.

10

36

P1000: 3000  
P2000: 1250

**P2489** **HG**

Part No.	Finish		
P2489	HG		

\* Used in pair

T= 15 Nm  
M10 x 40

22 mm max.

45

70

90

5

1450 N

**P1796-A** **HG** **SS**

Part No.	Finish		
P1796-A	HG	SS	

\* Used in pair

T= 15 Nm  
M10 x 40

22 mm max.

45

90

90

5

1450 N

**P1796** **HG** **SS**

Part No.	Finish		
P1796	HG	SS	

\* Used in pair

T= 15 Nm  
M10 x 40

22 mm max.

45

131

90

5

1450 N

**P1796-B** **HG** **SS**

Part No.	Finish		
P1796-B	HG	SS	

T= 20 Nm  
M12 x 40

22 mm max.

10

50

63 int.

P1000: 2250

**P1271** **HG** **SS**

Part No.	Finish		
P1271	HG	SS	

T= 10 Nm  
M10 x 40

22 mm max.

5

50

25

30


1300 N

**P1272** **HG** **SS**

Part No.	Finish		
P1272	HG	SS	

Stated loadings apply to mild steel products only.

## Channel Fittings

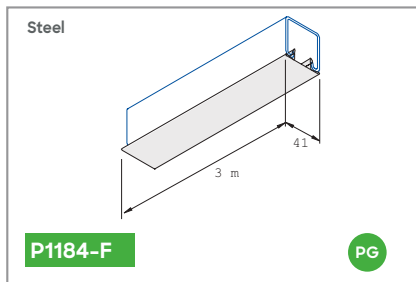


Part No.	W	
P1184-F	1.07	1



Part No.	Part No.	Part No.		W	
Blue	White	Black		/100	
139 21 98	139 21 96	139 21 97	41x21	0.3	100




Part No.	Part No.	Part No.		W	
Blue	White	Black		/100	
139 41 98	139 41 96	139 41 97	41x41	0.5	100

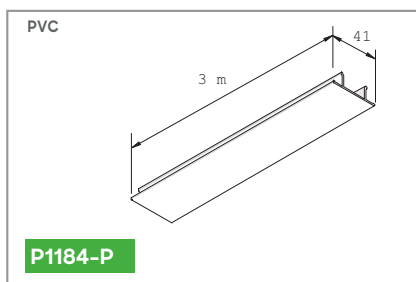


Part No.	Colour	W	
P1184-PW	White	0.48	1
P1184-PB	Black	0.48	1


# Cantilever Arms

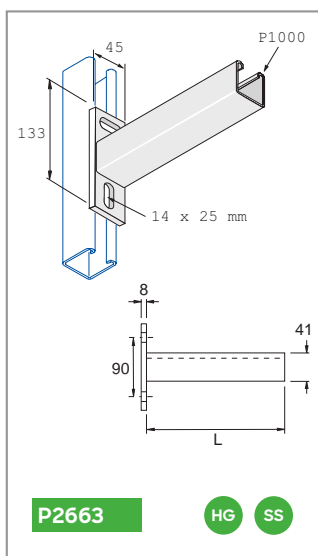

Part No.	Finish HG	SS	W mm	L (mm)	Diagram 1 (F1)	Diagram 2 (F1)	Diagram 3 (F1, F2, F2)	Diagram 4 (F3, F3, F3)
P2663/150	-	-	0.77	150	6.20 kN	3.10 kN	3.10 kN	2.06 kN
P2663/300	-	-	1.20	300	3.20 kN	1.60 kN	1.60 kN	1.06 kN
P2663/450	-	-	1.63	450	2.15 kN	1.07 kN	1.07 kN	0.71 kN
P2663/600	-	-	2.07	600	1.62 kN	0.81 kN	0.81 kN	0.54 kN
P2663/750	-	-	2.50	750	1.30 kN	0.65 kN	0.65 kN	0.43 kN

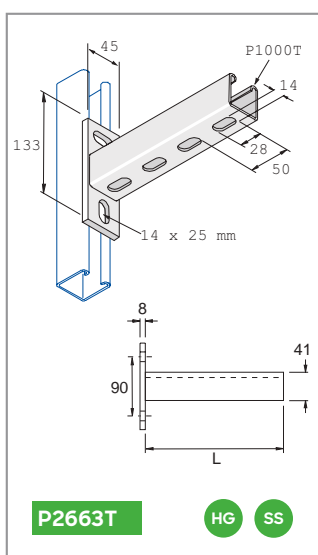

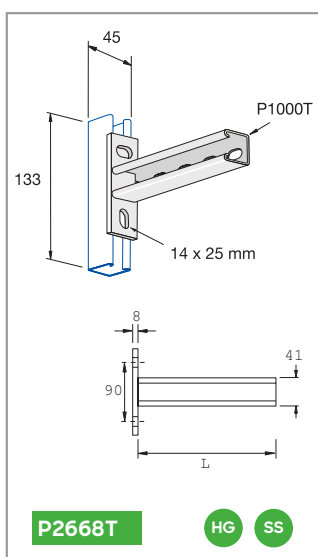



Part No.	Finish HG	SS	ZP	W mm	L (mm)	Diagram 1 (F1)	Diagram 2 (F1)	Diagram 3 (F1, F2, F2)	Diagram 4 (F3, F3, F3)
P2663T/150	-	-	-	0.75	150	6.12 kN	3.06 kN	3.06 kN	2.04 kN
P2663T/300	-	-	-	1.16	300	3.06 kN	1.53 kN	1.53 kN	1.02 kN
P2663T/450	-	-	-	1.57	450	2.04 kN	1.02 kN	1.02 kN	0.68 kN
P2663T/600	-	-	-	1.98	600	1.53 kN	0.76 kN	0.76 kN	0.50 kN
P2663T/750	-	-	-	2.39	750	1.22 kN	0.61 kN	0.61 kN	0.40 kN








Part No.	Finish HG	SS	W mm	L (mm)	Diagram 1 (F1)	Diagram 2 (F1)	Diagram 3 (F1, F2, F2)	Diagram 4 (F3, F3, F3)
P2668T/150	-	-	0.75	150	6.20 kN	3.10 kN	3.10 kN	2.06 kN
P2668T/300	-	-	1.16	300	3.20 kN	1.60 kN	1.60 kN	1.06 kN
P2668T/450	-	-	1.57	450	2.15 kN	1.07 kN	1.07 kN	0.71 kN
P2668T/600	-	-	1.98	600	1.62 kN	0.81 kN	0.81 kN	0.54 kN


™ Loadings indicated are only applicable when 2 fixings per cantilever arms are used.  
Stated loadings apply to mild steel products only.

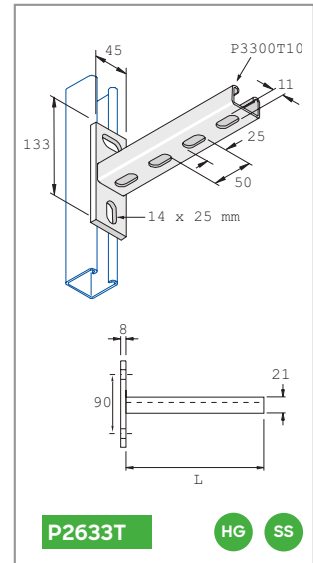



## Cantilever Arms


Part No.	Finish HG   SS	W (mm)	L (mm)				
P2633T/150	-   -	0.60	150	1.94 kN	0.97 kN	0.97 kN	0.64 kN
P2633T/300	-   -	0.87	300	1.00 kN	0.50 kN	0.50 kN	0.33 kN
P2633T/450	-   -	1.13	450	0.67 kN	0.33 kN	0.33 kN	0.22 kN

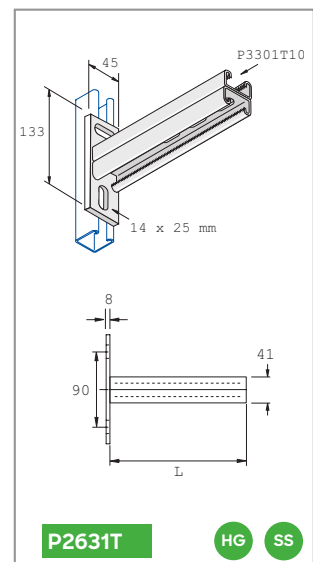

Part No.	Finish HG   SS	W (mm)	L (mm)				
P2631T/150	-   -	0.87	150	5.95 kN	2.97 kN	2.97 kN	1.98 kN
P2631T/300	-   -	1.40	300	3.07 kN	1.53 kN	1.53 kN	1.02 kN
P2631T/450	-   -	1.93	450	2.06 kN	1.03 kN	1.03 kN	0.68 kN
P2631T/600	-   -	2.46	600	1.56 kN	0.78 kN	0.78 kN	0.52 kN
P2631T/750	-   -	2.99	750	1.25 kN	0.62 kN	0.62 kN	0.41 kN




Part No.	Finish HG   SS	W (mm)	L (mm)				
P2665T/150	-   -	1.44	150	8.82 kN	4.41 kN	4.41 kN	2.94 kN
P2665T/300	-   -	2.21	300	6.47 kN	3.23 kN	3.24 kN	2.15 kN
P2665T/450	-   -	3.09	450	4.31 kN	2.15 kN	2.15 kN	1.43 kN
P2665T/600	-   -	3.72	600	3.23 kN	1.61 kN	1.61 kN	1.07 kN
P2665T/750	-   -	4.73	750	2.58 kN	1.29 kN	1.29 kN	0.86 kN

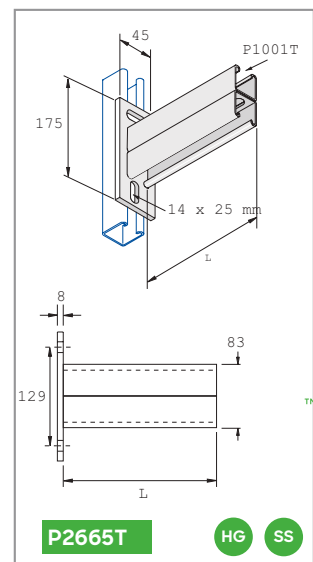


Loadings indicated are only applicable when 2 fixings per cantilever arms are used.  
Stated loadings apply to mild steel products only.


## Cantilever Arms

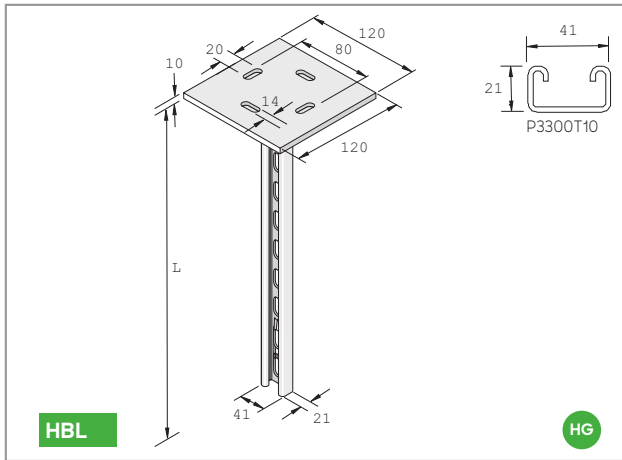


Part No.	Finish HG	L (mm)	W
HBL/500	.	525	2.00
HBL/750	.	775	2.44
HBL/1000	.	1025	2.88
HBL/1250	.	1275	3.32

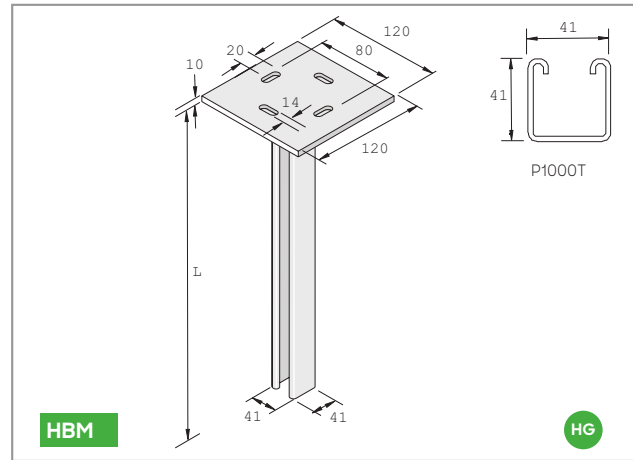

Part No.	Finish HG	L (mm)	W
HBM/500	.	525	2.51
HBM/750	.	775	3.19
HBM/1000	.	1025	3.88
HBM/1250	.	1275	4.30

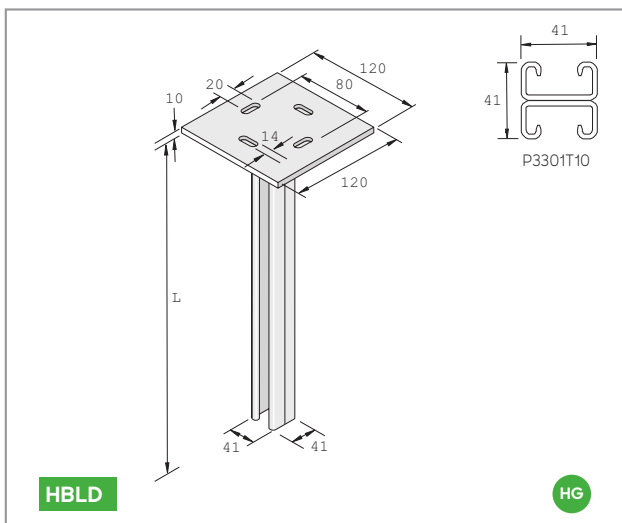


Part No.	Finish HG	L (mm)	W
HBLD/500	.	525	2.93
HBLD/750	.	775	3.81
HBLD/1000	.	1025	4.70
HBLD/1250	.	1275	5.58
HBLD/1500	.	1525	6.46
HBLD/2000	.	2025	8.23

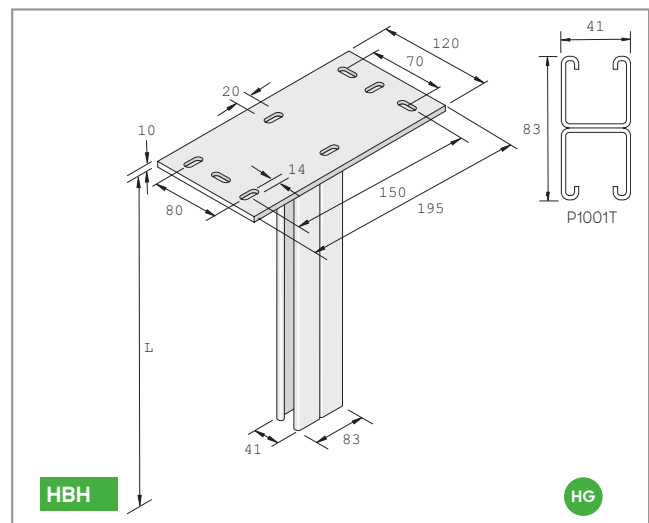

Part No.	Finish HG	L (mm)	W
HBH/500	.	525	4.60
HBH/750	.	775	5.97
HBH/1000	.	1025	7.33
HBH/1250	.	1275	8.70
HBH/1500	.	1525	10.07
HBH/2000	.	2025	12.80

## Nuts, Bolts & Washers




HEX. HEAD SCREW

ZP HG SS


ZP	Part No. M6 HG	SS	ZP	Part No. M8 HG	SS	ZP	Part No. M10 HG	SS	ZP	Part No. M12 HG	SS	
93356X12	93336X12	93346X12	93358X20	93338X20	93348X20	933510X20	933310X20	933410X20	933512X22	933312X22	933412X22	100
93356X16	93336X16	93346X16	93358X25	93338X25	93348X25	933510X25	933310X25	933410X25	933512X25	933312X25	933412X25	100
93356X20	93336X20	93346X20	93358X30	93338X30	93348X30	933510X30	933310X30	933410X30	933512X30	933312X30	933412X30	100
93356X25	93336X25	93346X25	93358X35	93338X35	93348X35	933510X40	933310X40	933410X40	933512X40	933312X40	933412X40	100
93356X30	93336X30	93346X30	93358X40	93338X40	93348X40	933510X50	933310X50	933410X50	933512X50	933312X50	933412X50	100
93356X35	93336X35	93346X35	93358X45	93338X45	93348X45	933510X60	933310X60	933410X60	933512X60	933312X60	933412X60	100
93356X40	93336X40	93346X40	93358X50	93338X50	93348X50	933510X80	933310X80	933410X80	933512X80	933312X80	933412X80	100
93356X60	93336X60	93346X60	93358X60	93338X60	93348X60	933510X100	933310X100	933410X100	933512X100	933312X100	933412X100	100

Max Torque 30Nm



CHANNEL SOCKET


SIZE	Part No.
M10	12AF
M12	19AF



ROOFING NUT & BOLT

ZP

Part No.	Finish ZP	L (mm)	W /100	
M6x12RB	.	12	1.0	100
M6x16RB	.	16	1.0	100
M6x20RB	.	20	1.0	100
M6x25RB	.	25	1.0	100
M6x30RB	.	30	1.0	100
M6x40RB	.	40	1.0	100
M6x50RB	.	50	1.0	100
M6x60RB	.	60	1.0	100









CONE-POINTED SCREW

ZP

Part No.	Finish ZP	W /100	
M10x40CP	.	2.5	100
M12x40CP	.	3.9	100


# Fluorescent Lighting Supports & Fittings

## Channel Trolley Assemblies

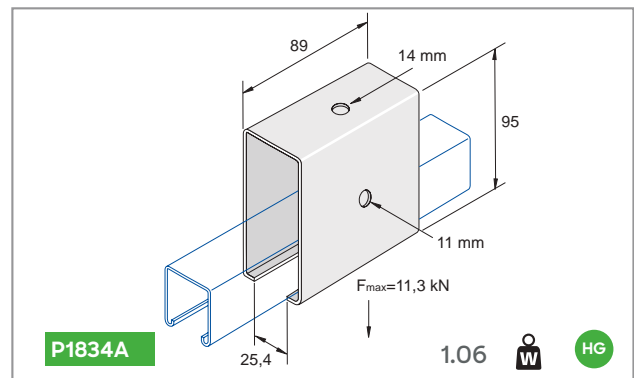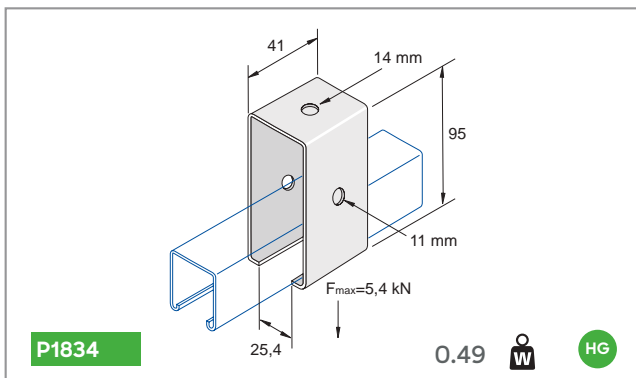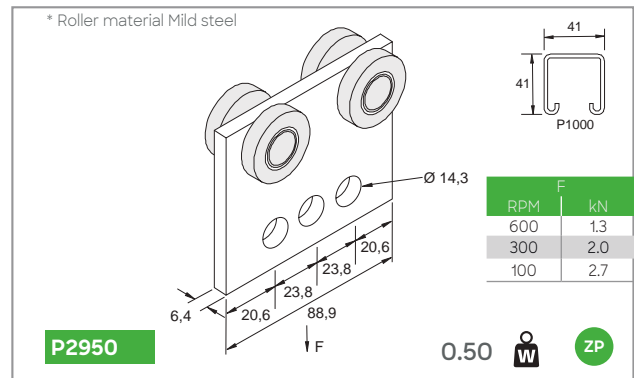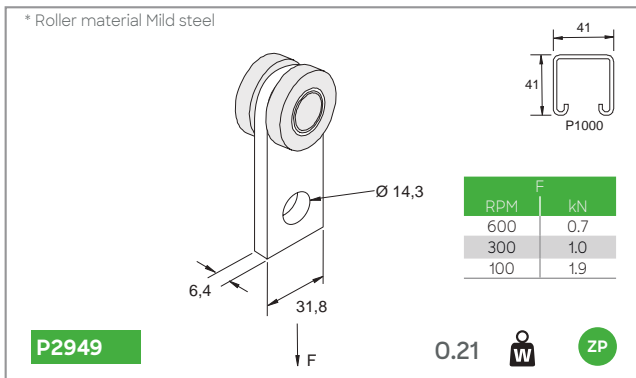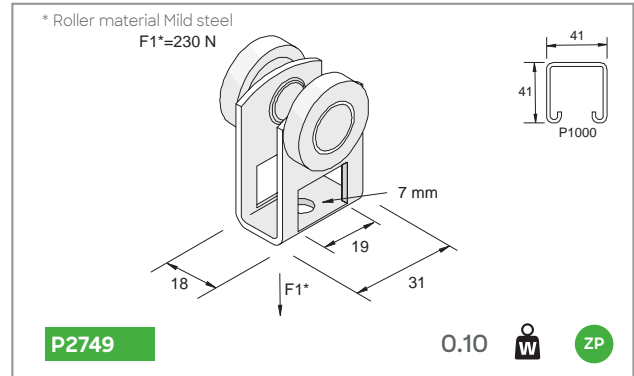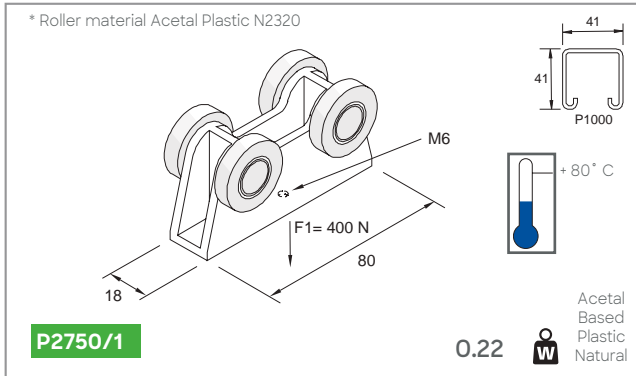



## Nuts, Bolts & Washers




HEX. HEAD SCREW

ZP HG SS


ZP	Part No. M6 HG	SS	ZP	Part No. M8 HG	SS	ZP	Part No. M10 HG	SS	ZP	Part No. M12 HG	SS	
93356X12	93336X12	93346X12	93358X20	93338X20	93348X20	933510X20	933310X20	933410X20	933512X22	933312X22	933412X22	100
93356X16	93336X16	93346X16	93358X25	93338X25	93348X25	933510X25	933310X25	933410X25	933512X25	933312X25	933412X25	100
93356X20	93336X20	93346X20	93358X30	93338X30	93348X30	933510X30	933310X30	933410X30	933512X30	933312X30	933412X30	100
93356X25	93336X25	93346X25	93358X35	93338X35	93348X35	933510X40	933310X40	933410X40	933512X40	933312X40	933412X40	100
93356X30	93336X30	93346X30	93358X40	93338X40	93348X40	933510X50	933310X50	933410X50	933512X50	933312X50	933412X50	100
93356X35	93336X35	93346X35	93358X45	93338X45	93348X45	933510X60	933310X60	933410X60	933512X60	933312X60	933412X60	100
93356X40	93336X40	93346X40	93358X50	93338X50	93348X50	933510X80	933310X80	933410X80	933512X80	933312X80	933412X80	100
93356X60	93336X60	93346X60	93358X60	93338X60	93348X60	933510X100	933310X100	933410X100	933512X100	933312X100	933412X100	100

Max Torque 30Nm



CHANNEL SOCKET


SIZE	Part No.
M10	12AF
M12	19AF



ROOFING NUT & BOLT

ZP

Part No.	Finish ZP	L (mm)	W /100	
M6x12RB	.	12	1.0	100
M6x16RB	.	16	1.0	100
M6x20RB	.	20	1.0	100
M6x25RB	.	25	1.0	100
M6x30RB	.	30	1.0	100
M6x40RB	.	40	1.0	100
M6x50RB	.	50	1.0	100
M6x60RB	.	60	1.0	100




CONE-POINTED SCREW


ZP

Part No.	Finish ZP	W /100	
M10x40CP	.	2.5	100
M12x40CP	.	3.9	100

## Nuts, Bolts & Washers

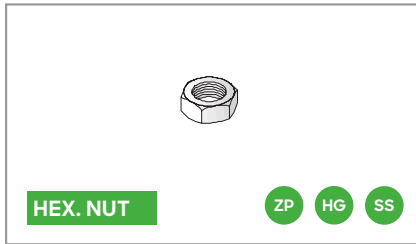


Part No. M6			Part No. M8			Part No. M10			Part No. M12		
ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	ZP	HG	SS
9345M6	9343M6	9344M6	9345M8	9343M8	9344M8	9345M10	9343M10	9344M10	9345M12	9343M12	9344M12

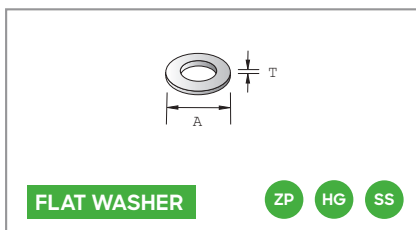


Part No. M6			Part No. M8			Part No. M10			Part No. M12			Part No. M16			
ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	
1255M6	1253M6	1254M6	1255M8	1253M8	1254M8	1255M10	1253M10	1254M10	1255M12	1253M12	1254M12	1255M16	1253M16	1254M16	100
(A=12.5mm)			(A=17mm)			(A=21mm)			(A=24mm)			(A=30mm)			
(T=1.6mm)			(T=2.0mm)			(T=2.5mm)			(T=3.0mm)			(T=3.0mm)			


# Washers & Threaded Rod Connectors

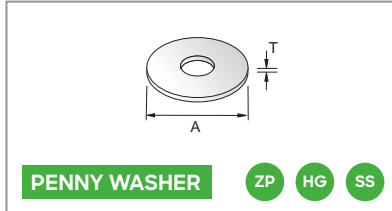


Part No. M6	Part No. M8	Part No. M10	Finish			
ZP	A	T				
PYWM6X25	PYWM8X25	PYWM10X25	-	25	1.5	100
PYWM6X32	PYWM8X32	PYWM10X32	-	32	1.5	100

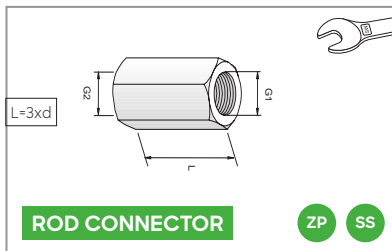

Part No. M6			Part No. M8			Part No. M10			Part No. M12			Part No. M16			
ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	ZP	HG	SS	
63345M6	63343M6	63344M6	63345M8	63343M8	63344M8	63345M10	63343M10	63344M10	63345M12	63343M12	63344M12	63345M16	63343M16	63344M16	100

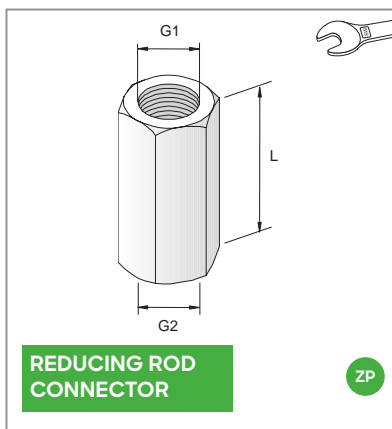


Part No.	Finish ZP	G1	G2	SW mm	L mm	
SPM8M10	-	M8	M10	13	30	50
SPM10M12	-	M10	M12	17	30	50

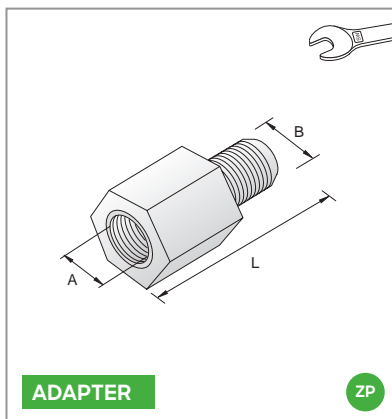



Part No.	Finish ZP	A	B	SW mm	L mm	
310810	-	M8	M10	13	21	50
310812	-	M8	M12	13	23	50
311008	-	M10	M8	13	23	50
311012	-	M10	M12	13	23	50
311016	-	M10	M16	19	32	50
311208	-	M12	M8	17	23	50
311210	-	M12	M10	17	25	50
311216	-	M12	M16	19	32	50
311610	-	M16	M10	24	32	50
311612	-	M16	M12	24	32	50

# Threaded Rod & Studs

Part No. M6	Part No. M8	Part No. M10	Part No. M12	Part No. M16	ZP	Finish SS	HG
M6x1M	M8x1M	M10x1M	M12x1M	M16x1M	.	.	.
M6x2M	M8x2M	M10x2M	M12x2M	M16x2M	.	.	.
M6x3M	M8x3M	M10x3M	M12x3M	M16x3M	.	.	.

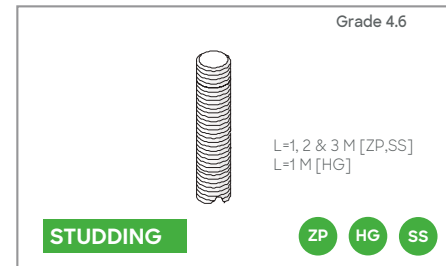

## Non Drill Anchors

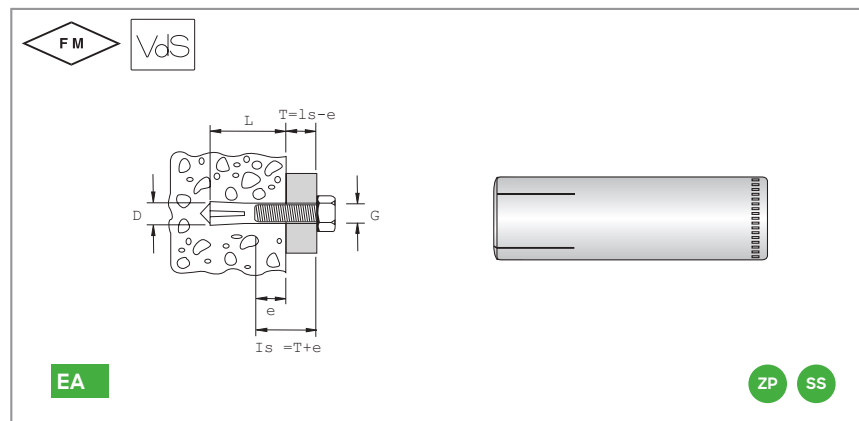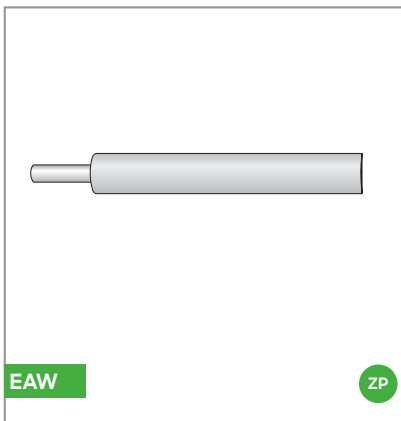


Part No.	Part No.
EAWH6	EAM6
EAWH8	EAM8
EAWH8x40	EAM8x40
EAWH10	EAM10
EAWH12	EAM12
EAWH16	EAM16
EAWH20	EAM20


Part No.	Finish ZP	Class	D mm	L mm	$\phi$ mm	G	e (mm)			Approval:	
EAM6	.	-	8	25	8	M6	6	11	100		
EAM8	.	1.8kN*	10	30	10	M8	8	13	100	VdS	
EAM8x40	.	3kN*	10	40	10	M8	8	13	50	VdS	FM
EAM10	.	3.6kN*	12	40	12	M10	10	17	50	VdS	FM
EAM12	.	5.7kN*	15	50	15	M12	12	18	25	VdS	FM
EAM16	.	7.4kN*	20	65	20	M16	16	21	20	VdS	FM
EAM20	.	11.3kN*	25	80	25	M20	20	30	10	VdS	FM

Part No.	Finish SS	Class	D mm	L mm	$\phi$ mm	G	e (mm)			Approval:	
EAM6	.	-	8	25	8	M6	6	11	100		
EAM8	.	-	10	30	10	M8	8	13	100		
EAM10	.	3.0kN*	12	40	12	M10	10	17	50	VdS	FM
EAM12	.	3.6kN*	15	50	15	M12	12	18	25		FM
EAM16	.	5.7kN*	20	65	20	M16	16	21	20		FM

\* Loading data is applicable for concrete pressure zone only (B=25 N/mm<sup>2</sup>)

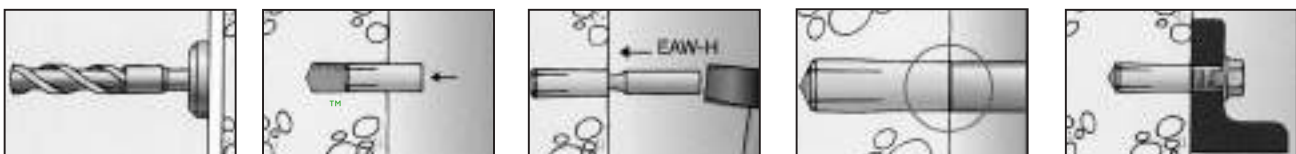


## Rod Swivel

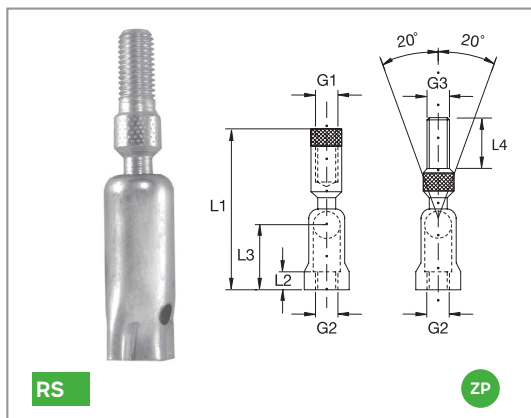

Part No.	Finish ZP	G1	G2	G3	L1 mm	L2 mm	L3 mm	L4 mm	Fmax N	W	
124 08 03	-	M8	M8		74	8	30	15	2500	.03	100
124 10 03	-	M10	M10		74	8	30	15	2500	.04	100
124 12 03	-	M12	M12		96	15	53		5000	.15	100
66 42 008	-	M8	M8		49	10	20	15	3100	.03	50
66 42 010	-	M10	M10		49	13	23	15	3100	.03	50


## Adjustable Angle Fitting with Sound Insulation

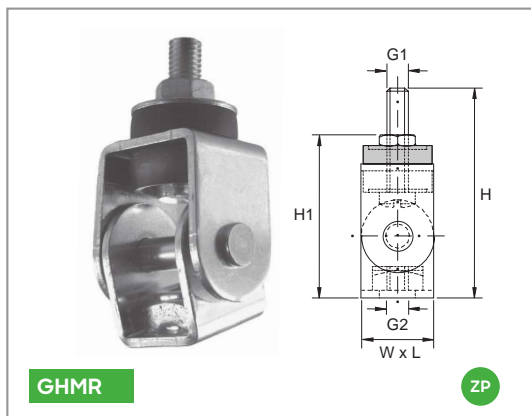





Part No.	Finish ZP	G1	G2	H2 mm	W x L mm	H1 mm	H mm	Fmax kN	W	
124 08 86	-	M8	M8	45	36 x 25	60	70	5.7	.13	100
124 81 06	-	M8	M10	45	36 x 25	60	70	5.7	.13	100



Sound insulation value on average 22 dB (A)

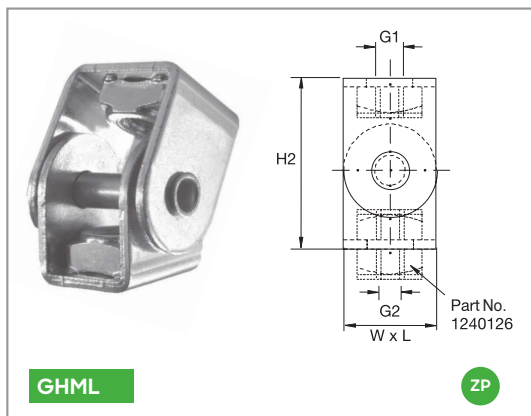

PART NO	FINISH ZP	G1	G2	H2 MM	W x L MM	90°	135°	180°	FMAX(kN)	W	
124 00 86	-	M8	M8	45	36 x 25	3.5	4.5	5.5	.11	100	
124 01 06	-	M10	M10	45	36 x 25	3.5	4.5	5.5	.11	100	
124 01 26	-	M12	M12	64	36 x 25	3.5	4.5	5.5	.12	100	



# Universal Hinge

**UGM10 Universal Hinge Mount**  
The perfect solution for suspending threaded rod vertically from an angled roof or ceiling.

## Features & Benefits



- Can be fixed directly to roof sections, or attached to Atkore Unistrut channel mounted across purlins/beams
- Accepts all M10 ZP threaded products (including threaded rod)
- Fully adjustable through 135 degrees to suit any mounting application

## Technical Information

- Mass: 10.8kgs/100
- Working load with a safety factor of 3 is 3.0kN or 300kg
- Tighten threaded rod into position using the serrated nut and locking plate (both supplied)
- Threaded rod supplied separately




## Application Diagram

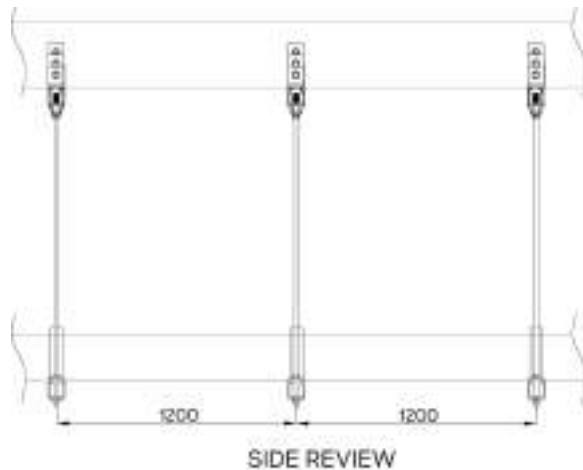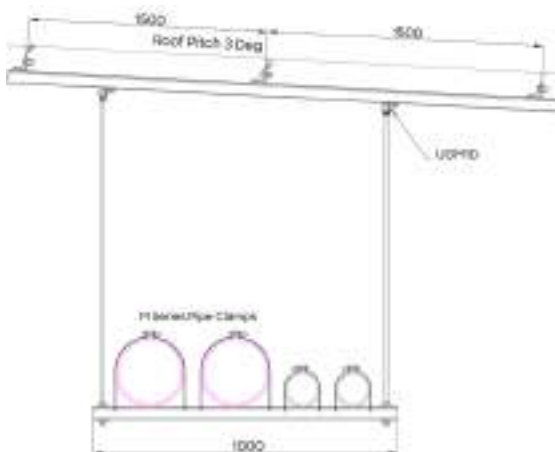



**Atkore**  
Unistrut

# Beam Clamps

## Beam Clamps





v = good  
x = wrong



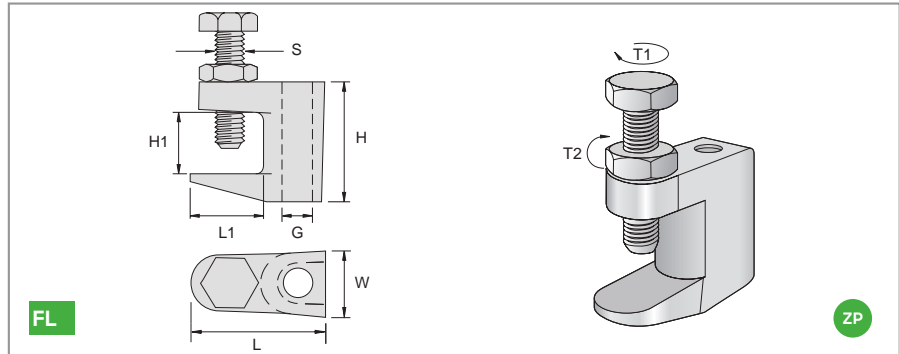



Part No.	Finish	Fmax kN	T1 Nm	T2 Nm	L mm	H mm	W mm	H1 mm	L1 mm	G mm	S mm	Approval:
FL16T	-	1.1	8	11	36	35	19	17	20	M6	8	50
FL18D	-	1.1	8	11	36	35	19	17	20	9	8	50
FL18T	-	1.1	8	11	36	35	19	17	20	M8	8	50
FL201D	-	2.4	8	22	45	40	22	19	22	11	10	50
FL201T	-	2.4	8	22	45	40	22	19	22	M10	10	50
F312D	-	3.1	8	22	50	46	25	23	28	13	10	25
F312T	-	3.1	8	22	50	46	25	23	28	M12	10	25

## Articulated Beam Clamps


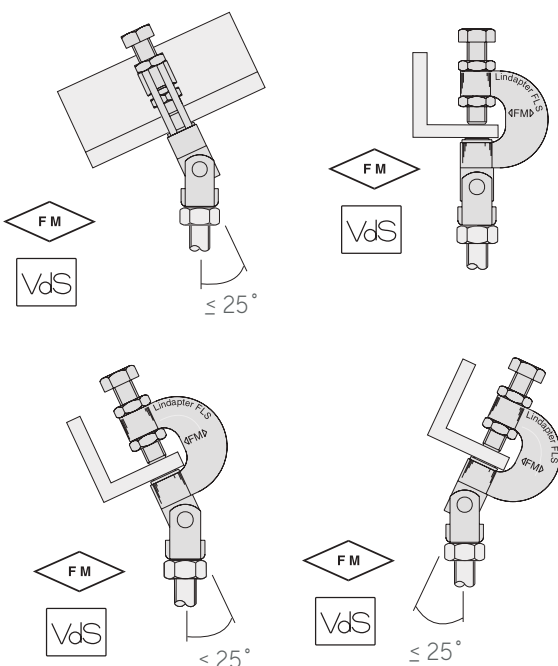
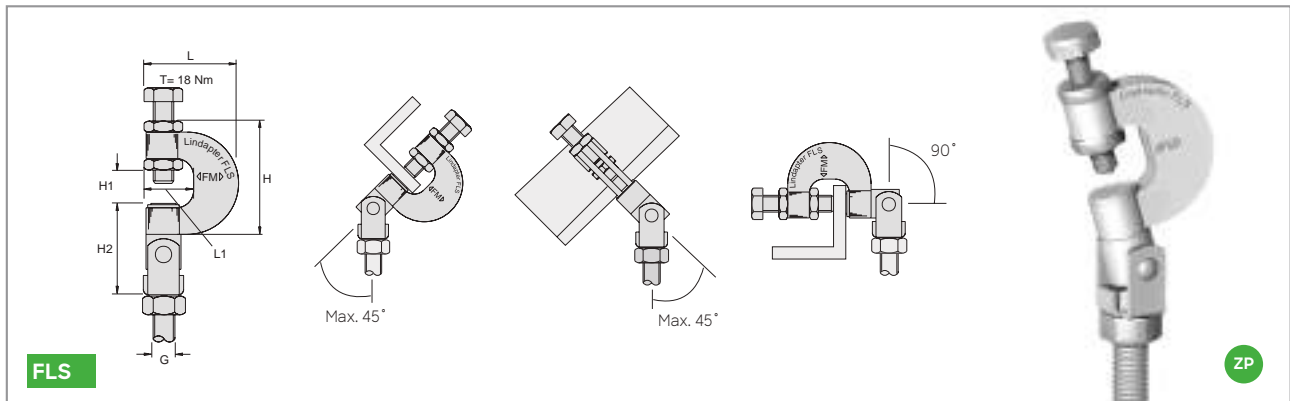


Part No.	Finish	G	Fmax (<25°) kN	Fmax (>25°) kN	T Nm	H2 mm	L mm	H mm	H1 mm	L1 mm	Approval:
FLS08	-	M8	2.5	1.5	18	55	53	58	17	27	VdS
FLS10	-	M10	2.5	1.5	18	55	53	58	17	27	VdS FM






## Fixings

### Deck and Purlin Fixings

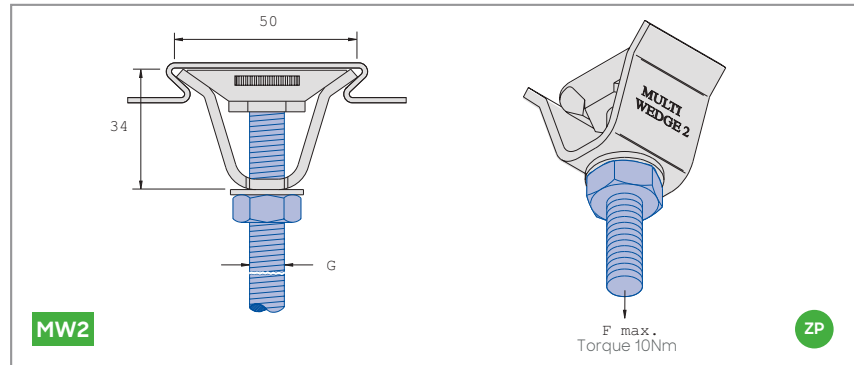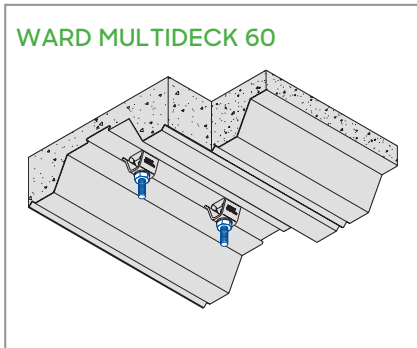

Part No.	Finish ZP	G	Fmax kN	$\frac{W}{m}$	
MW06	-	M6	1.47	0.10	50
MW08	-	M8	1.47	0.10	50
MW10	-	M10	1.47	0.10	50

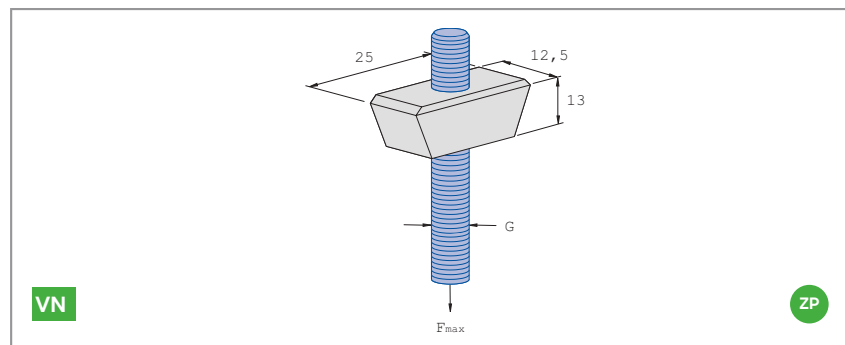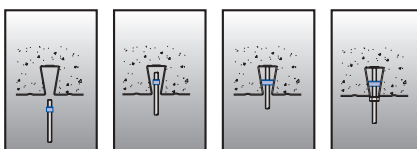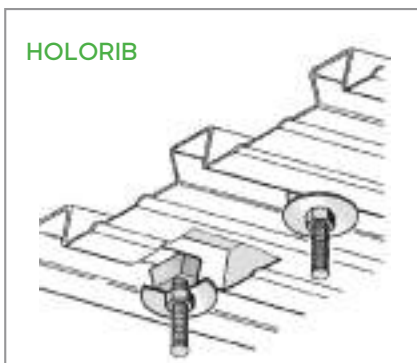


Part No.	Finish ZP	G	Fmax kN	$\frac{W}{m}$	
VN04	-	M4	0.86	0.02	500
VN05	-	M5	1.4	0.02	500
VN06	-	M6	1.8	0.02	500
VN08	-	M8	2.0	0.02	500
VN10	-	M10	2.1	0.02	500

Loads quoted are subject to the strength of the supporting decking. Suitable for decking with a 15° tapered slot.



# THE CABLE TRAY RANGE

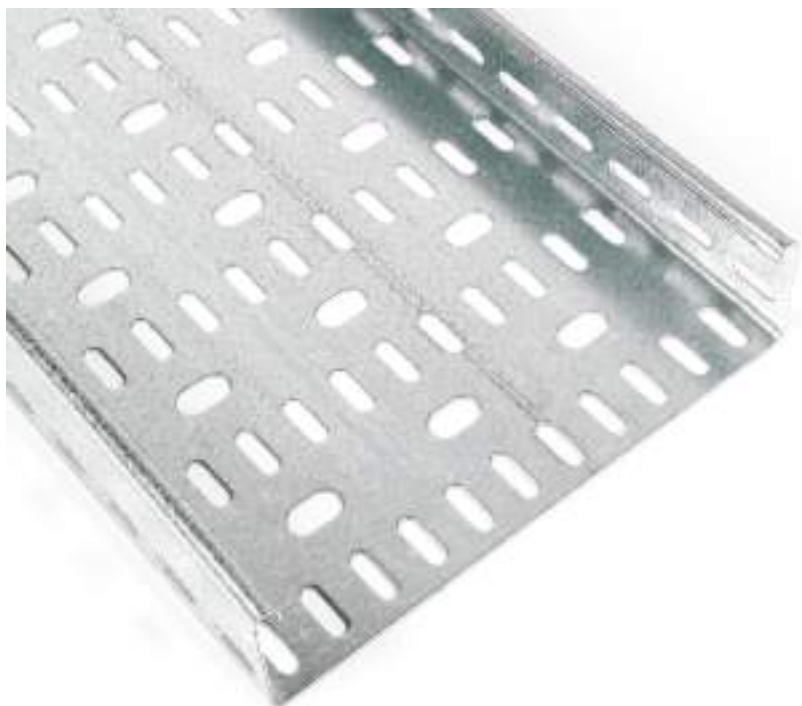

## Atkore Unistrut Slot Pattern

Traditional Unistrut standard design in use since 1965, synonymous with strength and quality.

The complete range of Atkore Unistrut Cable Tray for use in **Light**, **Medium**, **Heavy** & **Extra Heavy** duty applications. Available in a variety of sizes, the Atkore Unistrut system provides the ultimate in flexibility, quality and speed in installation. Ideal for all your cable applications, from low power control and signalling to mains power supply cabling. With a complete range of fixings and accessories including bends, risers and covers.

### Light Duty (TULL)

Available in 3m lengths with depths of 12mm (50mm wide to 225mm wide) and 18mm (300mm to 900mm wide), in [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel finishes.

### Heavy Duty (TUHLT)

Available in 3m lengths with a depth of 50mm and widths from 50 to 900mm, in [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel.

### 150mm Deep Cable Tray (TUXHLT)

Available in 3m lengths with a depth of 150mm and from 100 to 600mm widths. Finish applications include [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel.

### Medium Duty (TUMLT)

Available in 3m lengths with a depth of 25mm and widths from 50 to 900mm, in [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel finishes.

### Extra Heavy Duty (TUEHLT)

Available in 3m lengths with a depth of 100mm and from 100 to 900mm widths. Finish applications include [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel.

# ATKORE UNISTRUT CABLE TRAY



## Cable Tray Features:

- Traditional Unistrut slot pattern
- All material is European standard graded
- Widths : 50, 75, 100, 150, 225, 300, 450, 600, 750 and 900mm
- Compatible with Unistrut fittings only
- Stock held in the UK
- An extensive range of dedicated accessories, bracketry and support systems
- Covers available for all sizes

## Standard Material & Finish Codes

Finish	Code
Pre-Galvanised	PG
Hot Dipped Galvanised	HG
Stainless Steel	SS

Other materials and finishes available upon request.

Materials standards and details can be found on page 8.

## Material Standards

Finish	Standard
PG	Pre-Galvanised Steel to BS EN 10346 DX51D Z275-N-A-
HG	Mild Steel to BS EN 10111 - DD11 or BS EN 10139 - DC01
DH	BS EN 10025 S275JO+AR+CL1 or equivalent/better - 2mm thick min. material.
SS	Stainless Steel - Hot Rolled to B.S.EN10088-2-1.4404+1D

## Icon Key



Including Fitments



Sold as Pair



Sold as Individual

Pickle & Passivate is available upon request.

## Light Duty

### Atkore Unistrut Light Duty Cable Tray



Light duty Cable Tray is lightweight and often selected for ease of installation. Atkore Unistrut offer a wide range of accessories and fixings to suit, please refer to page 66.



Available in 3m lengths with widths from 50 to 900mm.

Cable Tray

Size	Part No.			W	B	C	Weight
	PG	HG	SS	mm	mm	mm	kg
50mm x 3m	TULL050/10PG	TULL050/10HG	TULL050/10SS	50	12	0.80	1.23
75mm x 3m	TULL075/10PG	TULL075/10HG	TULL075/10SS	75	12	0.80	1.68
100mm x 3m	TULL100/10PG	TULL100/10HG	TULL100/10SS	100	12	0.80	2.13
150mm x 3m	TULL150/10PG	TULL150/10HG	TULL150/10SS	150	12	0.80	2.86
225mm x 3m	TULL225/10PG	TULL225/10HG	TULL225/10SS	225	12	0.80	3.92
300mm x 3m	TULL300/15PG	TULL300/15HG	TULL300/15SS	300	18	1.20	7.98
450mm x 3m	TULL450/15PG	TULL450/15HG	TULL450/15SS	450	18	1.20	18.25
600mm x 3m	TULL600/20PG	TULL600/20HG	TULL600/20SS	600	18	1.20	30.37
750mm x 3m	TULL750/20PG	TULL750/20HG	TULL750/20SS	750	18	2.00	39.45
900mm x 3m	TULL900/20PG	TULL900/20HG	TULL900/20SS	900	18	2.00	47.01

TM

## Medium Duty


### Atkore Unistrut Medium Duty Cable Tray

Medium duty steel Cable Tray, robust enough to meet a wide variety of applications but light enough to handle and install with ease and complete with wide range of accessories and fixings to suit, please refer to page 66.

Available in 3m lengths with widths from 50 to 900mm,



**Sold as Individual**

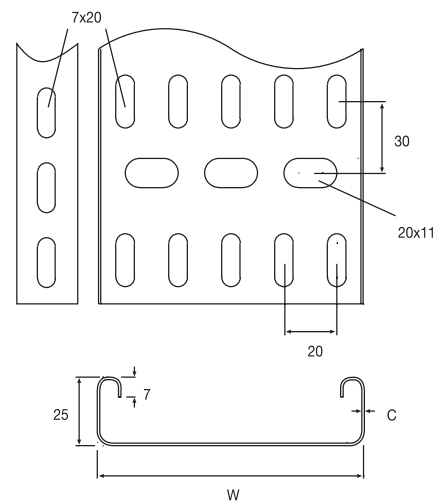

Cable Tray

Size (W)	Part No.			W	C	Weight
	PG	HG	SS	mm	mm	kg
50mm x 3m	TUMLT050/10PG	TUMLT050/10HG	TUMLT050/10SS	50	0.80	2.02
75mm x 3m	TUMLT075/10PG	TUMLT075/10HG	TUMLT075/10SS	75	0.80	2.48
100mm x 3m	TUMLT100/10PG	TUMLT100/10HG	TUMLT100/10SS	100	0.80	2.93
150mm x 3m	TUMLT150/10PG	TUMLT150/10HG	TUMLT150/10SS	150	0.80	3.72
225mm x 3m	TUMLT225/10PG	TUMLT225/10HG	TUMLT225/10SS	225	0.80	4.97
300mm x 3m	TUMLT300/15PG	TUMLT300/15HG	TUMLT300/15SS	300	1.20	9.13
450mm x 3m	TUMLT450/15PG	TUMLT450/15HG	TUMLT450/15SS	450	1.20	12.82
600mm x 3m	TUMLT600/15PG	TUMLT600/15HG	TUMLT600/15SS	600	1.20	16.5
750mm x 3m	TUMLT750/20PG	TUMLT750/20HG	TUMLT750/20SS	750	2.00	40.75
900mm x 3m	TUMLT900/20PG	TUMLT900/20HG	TUMLT900/20SS	900	2.00	48.13

## Heavy Duty


### Atkore Unistrut Heavy Duty Cable Tray



Heavy duty steel Cable Tray, designed to meet heavy cable load needs and complete with wide range of accessories and fixings to suit, please refer to page 66.



Available in 3m lengths with widths from 50 to 900mm.

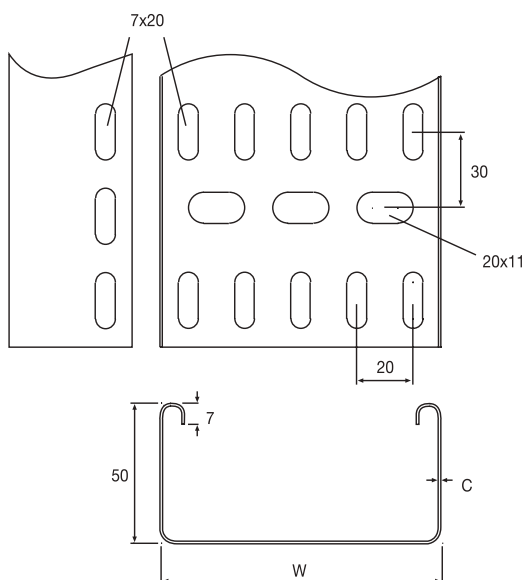

Size (W)	Part No.			W	C	Weight
	PG	HG	SS	mm	mm	kg
50mm x 3m	TUHLT050/10PG	TUHLT050/10HG	TUHLT050/10SS	50	0.80	3.16
75mm x 3m	TUHLT075/10PG	TUHLT075/10HG	TUHLT075/10SS	75	0.80	3.46
100mm x 3m	TUHLT100/10PG	TUHLT100/10HG	TUHLT100/10SS	100	0.80	3.92
150mm x 3m	TUHLT150/10PG	TUHLT150/10HG	TUHLT150/10SS	150	0.80	4.71
225mm x 3m	TUHLT225/15PG	TUHLT225/15HG	TUHLT225/15SS	225	1.20	8.72
300mm x 3m	TUHLT300/15PG	TUHLT300/15HG	TUHLT300/15SS	300	1.20	10.59
450mm x 3m	TUHLT450/20PG	TUHLT450/20HG	TUHLT450/20SS	450	2.00	23.28
600mm x 3m	TUHLT600/20PG	TUHLT600/20HG	TUHLT600/20SS	600	2.00	29.35
750mm x 3m	TUHLT750/20PG	TUHLT750/20HG	TUHLT750/20SS	750	2.00	45.3
900mm x 3m	TUHLT900/20PG	TUHLT900/20HG	TUHLT900/20SS	900	2.00	78.8

**Atkor**™

# Extra Heavy Duty


## Atkore Unistrut Extra Heavy Duty Cable Tray

Extra heavy duty cable tray is perfect for applications which require a more robust solution.

Available in 3m lengths with widths from 100 & 900mm.



**Sold as Individual**

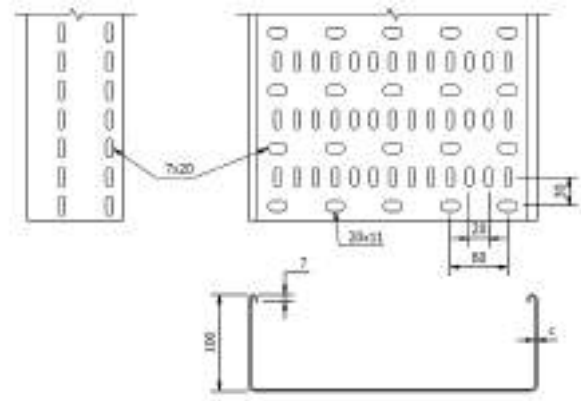

Cable Tray

Size (W)	Part No.			W	C	Weight
	PG	HG	SS	mm	mm	kg
75mm x 3m	TUEHLT075/10PG	TUEHLT075/10HG	TUEHLT075/10SS	75	0.8	6.00
100mm x 3m	TUEHLT100/10PG	TUEHLT100/10HG	TUEHLT100/10SS	100	0.8	6.00
150mm x 3m	TUEHLT150/10PG	TUEHLT150/10HG	TUEHLT150/10SS	150	0.8	6.99
225mm x 3m	TUEHLT225/15PG	TUEHLT225/15HG	TUEHLT225/15SS	225	1.2	12.43
300mm x 3m	TUEHLT300/15PG	TUEHLT300/15HG	TUEHLT300/15SS	300	1.2	14.55
450mm x 3m	TUEHLT450/15PG	TUEHLT450/15HG	TUEHLT450/15SS	450	1.2	31.13
600mm x 3m	TUEHLT600/20PG	TUEHLT600/20HG	TUEHLT600/20SS	600	2.0	38.20
750mm x 3m	TUEHLT750/20PG	TUEHLT750/20HG	TUEHLT750/20SS	750	2.0	45.40
900mm x 3m	TUEHLT900/20PG	TUEHLT900/20HG	TUEHLT900/20SS	900	2.0	52.47

## 45° Flat Bends

### Atkore Unistrut Flat Bends

#### Light Duty 45° Flat Bend (17mm)

Size (W)	Part No.			Weight kg
	PG	HG	SS	
50mm	TULB050/45PG	TULB050/45HG	TULB050/45SS	0.07
75mm	TULB075/45PG	TULB075/45HG	TULB075/45SS	0.12
100mm	TULB100/45PG	TULB100/45HG	TULB100/45SS	0.19
150mm	TULB150/45PG	TULB150/45HG	TULB150/45SS	0.33
225mm	TULB225/45PG	TULB225/45HG	TULB225/45SS	0.58
300mm	TULB300/45PG	TULB300/45HG	TULB300/45SS	1.34
450mm	TULB450/45PG	TULB450/45HG	TULB450/45SS	3.07
600mm	TULB600/45PG	TULB600/45HG	TULB600/45SS	5.13
750mm	TULB750/45PG	TULB750/45HG	TULB750/45SS	7.7
900mm	TULB900/45PG	TULB900/45HG	TULB900/45SS	10.79



Product image may vary dependant on duty of fitting, finish and size.

#### Medium Duty 45° Flat Bend (25mm)

Size (W)	Part No.			Weight kg
	PG	HG	SS	
50mm	TUMB050/45PG	TUMB050/45HG	TUMB050/45SS	0.13
75mm	TUMB075/45PG	TUMB075/45HG	TUMB075/45SS	0.17
100mm	TUMB100/45PG	TUMB100/45HG	TUMB100/45SS	0.22
150mm	TUMB150/45PG	TUMB150/45HG	TUMB150/45SS	0.34
225mm	TUMB225/45PG	TUMB225/45HG	TUMB225/45SS	0.55
300mm	TUMB300/45PG	TUMB300/45HG	TUMB300/45SS	1.16
450mm	TUMB450/45PG	TUMB450/45HG	TUMB450/45SS	2.00
600mm	TUMB600/45PG	TUMB600/45HG	TUMB600/45SS	3.01
750mm	TUMB750/45PG	TUMB750/45HG	TUMB750/45SS	6.60
900mm	TUMB900/45PG	TUMB900/45HG	TUMB900/45SS	8.75

#### Extra Heavy Duty 45° Flat Bend (100mm)

Size (W)	Part No.			Weight kg
	PG	HG	SS	
75mm	TUEHB075/45PG	TUEHB075/45HG	TUEHB075/45SS	0.36
100mm	TUEHB100/45PG	TUEHB100/45HG	TUEHB100/45SS	0.48
150mm	TUEHB150/45PG	TUEHB150/45HG	TUEHB150/45SS	0.50
225mm	TUEHB225/45PG	TUEHB225/45HG	TUEHB225/45SS	1.46
300mm	TUEHB300/45PG	TUEHB300/45HG	TUEHB300/45SS	2.07
450mm	TUEHB450/45PG	TUEHB450/45HG	TUEHB450/45SS	2.90
600mm	TUEHB600/45PG	TUEHB600/45HG	TUEHB600/45SS	3.00
750mm	TUEHB750/45PG	TUEHB750/45HG	TUEHB750/45SS	-
900mm	TUEHB900/45PG	TUEHB900/45HG	TUEHB900/45SS	10.4

#### Heavy Duty 45° Flat Bend (50mm)

Size (W)	Part No.			Weight kg
	PG	HG	SS	
75mm	TUHB075/45PG	TUHB075/45HG	TUHB075/45SS	0.24
100mm	TUHB100/45PG	TUHB100/45HG	TUHB100/45SS	0.30
150mm	TUHB150/45PG	TUHB150/45HG	TUHB150/45SS	0.43
225mm	TUHB225/45PG	TUHB225/45HG	TUHB225/45SS	0.64
300mm	TUHB300/45PG	TUHB300/45HG	TUHB300/45SS	1.32
450mm	TUHB450/45PG	TUHB450/45HG	TUHB450/45SS	2.18
600mm	TUHB600/45PG	TUHB600/45HG	TUHB600/45SS	3.22
750mm	TUHB750/45PG	TUHB750/45HG	TUHB750/45SS	7.22
900mm	TUHB900/45PG	TUHB900/45HG	TUHB900/45SS	9.55

#### Extra Extra Heavy Duty 45° Flat Bend (150mm)

Size (W)	Part No.			Weight kg
	PG	HG	SS	
75mm	TUXHB075/45PG	TUXHB075/45HG	TUXHB075/45SS	0.48
100mm	TUXHB100/45PG	TUXHB100/45HG	TUXHB100/45SS	1.00
150mm	TUXHB150/45PG	TUXHB150/45HG	TUXHB150/45SS	1.20
225mm	TUXHB225/45PG	TUXHB225/45HG	TUXHB225/45SS	1.40
300mm	TUXHB300/45PG	TUXHB300/45HG	TUXHB300/45SS	2.10
450mm	TUXHB450/45PG	TUXHB450/45HG	TUXHB450/45SS	2.80
600mm	TUXHB600/45PG	TUXHB600/45HG	TUXHB600/45SS	3.50
750mm	TUXHB750/45PG	TUXHB750/45HG	TUXHB750/45SS	-
900mm	TUXHB900/45PG	TUXHB900/45HG	TUXHB900/45SS	-

Adjustable Bends are available upon request. Contact our team for further information.

# 90° Bends

## Atkore Unistrut Flat Bends

### Light Duty 90° Flat Bend (17mm)



Sold as  
Individual

Product image may vary dependant on duty of fitting, finish and size.

Size (W)	Part No.			Weight
	PG	HG	SS	
				kg
50mm	TULB050/90PG	TULB050/90HG	TULB050/90SS	0.07
75mm	TULB075/90PG	TULB075/90HG	TULB075/90SS	0.12
100mm	TULB100/90PG	TULB100/90HG	TULB100/90SS	0.19
150mm	TULB150/90PG	TULB150/90HG	TULB150/90SS	0.33
225mm	TULB225/90PG	TULB225/90HG	TULB225/90SS	0.58
300mm	TULB300/90PG	TULB300/90HG	TULB300/90SS	1.34
450mm	TULB450/90PG	TULB450/90HG	TULB450/90SS	3.07
600mm	TULB600/90PG	TULB600/90HG	TULB600/90SS	5.13
750mm	TULB750/90PG	TULB750/90HG	TULB750/90SS	7.7
900mm	TULB900/90PG	TULB900/90HG	TULB900/90SS	10.79

### Extra Heavy Duty 90° Flat Bend (100mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
				kg
75mm	TUEHB075/90PG	TUEHB075/90HG	TUEHB075/90SS	0.51
100mm	TUEHB100/90PG	TUEHB100/90HG	TUEHB100/90SS	0.68
150mm	TUEHB150/90PG	TUEHB150/90HG	TUEHB150/90SS	0.79
225mm	TUEHB225/90PG	TUEHB225/90HG	TUEHB225/90SS	2.37
300mm	TUEHB300/90PG	TUEHB300/90HG	TUEHB300/90SS	2.10
450mm	TUEHB450/90PG	TUEHB450/90HG	TUEHB450/90SS	3.35
600mm	TUEHB600/90PG	TUEHB600/90HG	TUEHB600/90SS	4.89
750mm	TUEHB750/90PG	TUEHB750/90HG	TUEHB750/90SS	6.71
900mm	TUEHB900/90PG	TUEHB900/90HG	TUEHB900/90SS	13.7

### Medium Duty 90° Flat Bend (25mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
				kg
50mm	TUMB050/90PG	TUMB050/90HG	TUMB050/90SS	0.41
75mm	TUMB075/90PG	TUMB075/90HG	TUMB075/90SS	0.51
100mm	TUMB100/90PG	TUMB100/90HG	TUMB100/90SS	0.63
150mm	TUMB150/90PG	TUMB150/90HG	TUMB150/90SS	0.92
225mm	TUMB225/90PG	TUMB225/90HG	TUMB225/90SS	1.38
300mm	TUMB300/90PG	TUMB300/90HG	TUMB300/90SS	2.02
450mm	TUMB450/90PG	TUMB450/90HG	TUMB450/90SS	3.35
600mm	TUMB600/90PG	TUMB600/90HG	TUMB600/90SS	4.93
750mm	TUMB750/90PG	TUMB750/90HG	TUMB750/90SS	12.20
900mm	TUMB900/90PG	TUMB900/90HG	TUMB900/90SS	18.65

### Extra Extra Heavy Duty 90° Flat Bend (150mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
				kg
75mm	TUXHB075/90PG	TUXHB075/90HG	TUXHB075/90SS	-
100mm	TUXHB100/90PG	TUXHB100/90HG	TUXHB100/90SS	-
150mm	TUXHB150/90PG	TUXHB150/90HG	TUXHB150/90SS	1.20
225mm	TUXHB225/90PG	TUXHB225/90HG	TUXHB225/90SS	1.76
300mm	TUXHB300/90PG	TUXHB300/90HG	TUXHB300/90SS	2.30
450mm	TUXHB450/90PG	TUXHB450/90HG	TUXHB450/90SS	3.86
600mm	TUXHB600/90PG	TUXHB600/90HG	TUXHB600/90SS	5.48
750mm	TUXHB750/90PG	TUXHB750/90HG	TUXHB750/90SS	-
900mm	TUXHB900/90PG	TUXHB900/90HG	TUXHB900/90SS	-

### Heavy Duty 90° Flat Bend (50mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
				kg
75mm	TUHB075/90PG	TUHB075/90HG	TUHB075/90SS	0.39
100mm	TUHB100/90PG	TUHB100/90HG	TUHB100/90SS	0.48
150mm	TUHB150/90PG	TUHB150/90HG	TUHB150/90SS	0.68
225mm	TUHB225/90PG	TUHB225/90HG	TUHB225/90SS	1.5
300mm	TUHB300/90PG	TUHB300/90HG	TUHB300/90SS	2.09
450mm	TUHB450/90PG	TUHB450/90HG	TUHB450/90SS	3.53
600mm	TUHB600/90PG	TUHB600/90HG	TUHB600/90SS	5.31
750mm	TUHB750/90PG	TUHB750/90HG	TUHB750/90SS	11.1
900mm	TUHB900/90PG	TUHB900/90HG	TUHB900/90SS	14.69



## Equal Cross

### Atkore Unistrut Equal Crosses

#### Light Duty Equal Cross (17mm)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
50mm	TULX050PG	TULX050HG	TULX050SS	0.17
75mm	TULX075PG	TULX075HG	TULX075SS	0.26
100mm	TULX100PG	TULX100HG	TULX100SS	0.36
150mm	TULX150PG	TULX150HG	TULX150SS	0.62
225mm	TULX225PG	TULX225HG	TULX225SS	1.05
300mm	TULX300PG	TULX300HG	TULX300SS	2.23
450mm	TULX450PG	TULX450HG	TULX450SS	4.16
600mm	TULX600PG	TULX600HG	TULX600SS	6.75
750mm	TULX750PG	TULX750HG	TULX750SS	9.95
900mm	TULX900PG	TULX900HG	TULX900SS	13.77



Sold as  
Individual

Unequal Crosses are available upon request

Product image may vary dependant on duty of fitting, finish and size.

#### Medium Duty Equal Cross (25mm)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
50mm	TUMX050PG	TUMX050HG	TUMX050SS	0.64
75mm	TUMX075PG	TUMX075HG	TUMX075SS	0.68
100mm	TUMX100PG	TUMX100HG	TUMX100SS	0.81
150mm	TUMX150PG	TUMX150HG	TUMX150SS	1.15
225mm	TUMX225PG	TUMX225HG	TUMX225SS	1.70
300mm	TUMX300PG	TUMX300HG	TUMX300SS	3.28
450mm	TUMX450PG	TUMX450HG	TUMX450SS	5.47
600mm	TUMX600PG	TUMX600HG	TUMX600SS	8.14
750mm	TUMX750PG	TUMX750HG	TUMX750SS	13.38
900mm	TUMX900PG	TUMX900HG	TUMX900SS	17.45

#### Extra Heavy Duty Equal Cross (100mm)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
100mm	TUEHX100PG	TUEHX100HG	TUEHX100SS	1.56
150mm	TUEHX150PG	TUEHX150HG	TUEHX150SS	1.92
225mm	TUEHX225PG	TUEHX225HG	TUEHX225SS	2.40
300mm	TUEHX300PG	TUEHX300HG	TUEHX300SS	3.30
450mm	TUEHX450PG	TUEHX450HG	TUEHX450SS	6.50
600mm	TUEHX600PG	TUEHX600HG	TUEHX600SS	-
750mm	TUEHX750PG	TUEHX750HG	TUEHX750SS	-
900mm	TUEHX900PG	TUEHX900HG	TUEHX900SS	18.15

#### Heavy Duty Equal Cross (50mm)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
75mm	TUHX075PG	TUHX075HG	TUHX075SS	0.83
100mm	TUHX100PG	TUHX100HG	TUHX100SS	0.96
150mm	TUHX150PG	TUHX150HG	TUHX150SS	1.30
225mm	TUHX225PG	TUHX225HG	TUHX225SS	2.01
300mm	TUHX300PG	TUHX300HG	TUHX300SS	3.45
450mm	TUHX450PG	TUHX450HG	TUHX450SS	5.64
600mm	TUHX600PG	TUHX600HG	TUHX600SS	8.31
750mm	TUHX750PG	TUHX750HG	TUHX750SS	13.65
900mm	TUHX900PG	TUHX900HG	TUHX900SS	17.64

**Atkore™**  
Unistrut

# Equal Tee

## Atkore Unistrut Equal Tees



**Sold as  
Individual**

Unequal Crosses are available upon request

Product image may vary dependant on duty of fitting, finish and size.

### Light Duty Equal Tee (17mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
50mm	TULT050PG	TULT050HG	TULT050SS	0.12
75mm	TULT075PG	TULT075HG	TULT075SS	0.2
100mm	TULT100PG	TULT100HG	TULT100SS	0.29
150mm	TULT150PG	TULT150HG	TULT150SS	0.49
225mm	TULT225PG	TULT225HG	TULT225SS	0.87
300mm	TULT300PG	TULT300HG	TULT300SS	1.94
450mm	TULT450PG	TULT450HG	TULT450SS	3.91
600mm	TULT600PG	TULT600HG	TULT600SS	6.42
750mm	TULT750PG	TULT750HG	TULT750SS	9.56
900mm	TULT900PG	TULT900HG	TULT900SS	13.31

### Extra Heavy Duty Equal Tee (100mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
75mm	TUEHT075PG	TUEHT075HG	TUEHT075SS	-
100mm	TUEHT100PG	TUEHT100HG	TUEHT100SS	1.78
150mm	TUEHT150PG	TUEHT150HG	TUEHT150SS	-
225mm	TUEHT225PG	TUEHT225HG	TUEHT225SS	2.96
300mm	TUEHT300PG	TUEHT300HG	TUEHT300SS	3.80
450mm	TUEHT450PG	TUEHT450HG	TUEHT450SS	4.60
600mm	TUEHT600PG	TUEHT600HG	TUEHT600SS	7.70
750mm	TUEHT750PG	TUEHT750HG	TUEHT750SS	-
900mm	TUEHT900PG	TUEHT900HG	TUEHT900SS	19.2

### Medium Duty Equal Tee (25mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
50mm	TUMT050PG	TUMT050HG	TUMT050SS	0.41
75mm	TUMT075PG	TUMT075HG	TUMT075SS	0.51
100mm	TUMT100PG	TUMT100HG	TUMT100SS	0.63
150mm	TUMT150PG	TUMT150HG	TUMT150SS	0.92
225mm	TUMT225PG	TUMT225HG	TUMT225SS	1.38
300mm	TUMT300PG	TUMT300HG	TUMT300SS	2.02
450mm	TUMT450PG	TUMT450HG	TUMT450SS	3.35
600mm	TUMT600PG	TUMT600HG	TUMT600SS	4.93
750mm	TUMT750PG	TUMT750HG	TUMT750SS	12.20
900mm	TUMT900PG	TUMT900HG	TUMT900SS	18.65

### Extra Extra Heavy Duty Equal Tee (150mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
75mm	TUXHT075PG	TUXHT075HG	TUXHT075SS	-
100mm	TUXHT100PG	TUXHT100HG	TUXHT100SS	-
150mm	TUXHT150PG	TUXHT150HG	TUXHT150SS	-
225mm	TUXHT225PG	TUXHT225HG	TUXHT225SS	2.50
300mm	TUXHT300PG	TUXHT300HG	TUXHT300SS	3.10
450mm	TUXHT450PG	TUXHT450HG	TUXHT450SS	4.70
600mm	TUXHT600PG	TUXHT600HG	TUXHT600SS	7.30
750mm	TUXHT750PG	TUXHT750HG	TUXHT750SS	-
900mm	TUXHT900PG	TUXHT900HG	TUXHT900SS	-

### Heavy Duty Equal Tee (50mm)

Size (W)	Part No.			Weight
	PG	HG	SS	
75mm	TUHT075PG	TUHT075HG	TUHT075SS	0.83
100mm	TUHT100PG	TUHT100HG	TUHT100SS	0.96
150mm	TUHT150PG	TUHT150HG	TUHT150SS	1.30
225mm	TUHT225PG	TUHT225HG	TUHT225SS	2.01
300mm	TUHT300PG	TUHT300HG	TUHT300SS	3.45
450mm	TUHT450PG	TUHT450HG	TUHT450SS	5.64
600mm	TUHT600PG	TUHT600HG	TUHT600SS	8.31
750mm	TUHT750PG	TUHT750HG	TUHT750SS	13.65
900mm	TUHT900PG	TUHT900HG	TUHT900SS	17.64

## Adjustable Risers

### Atkore Unistrut Risers




Product image may vary dependant on duty of fitting, finish and size.




**Sold as Individual**

**Used as outside riser:**



**Used as inside riser:**



### Adjustable Risers (Light & Medium)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
50mm	TUMAR050PG	TUMAR050HG	TUMAR050SS	0.18
75mm	TUMAR075PG	TUMAR075HG	TUMAR075SS	0.24
100mm	TUMAR100PG	TUMAR100HG	TUMAR100SS	0.31
150mm	TUMAR150PG	TUMAR150HG	TUMAR150SS	0.43
225mm	TUMAR225PG	TUMAR225HG	TUMAR225SS	0.63
300mm	TUMAR300PG	TUMAR300HG	TUMAR300SS	0.81
450mm	TUMAR450PG	TUMAR450HG	TUMAR450SS	1.20
600mm	TUMAR600PG	TUMAR600HG	TUMAR600SS	2.47
750mm	TUMAR750PG	TUMAR750HG	TUMAR750SS	3.19
900mm	TUMAR900PG	TUMAR900HG	TUMAR900SS	4.01
Compatible with both Light and Medium cable trays				

### Adjustable Risers (Heavy)

Size (W)	Part No.			Weight
	PG	HG	SS	kg
75mm	TUHAR075PG	TUHAR075HG	TUHAR075SS	0.34
100mm	TUHAR100PG	TUHAR100HG	TUHAR100SS	0.40
150mm	TUHAR150PG	TUHAR150HG	TUHAR150SS	0.53
225mm	TUHAR225PG	TUHAR225HG	TUHAR225SS	0.72
300mm	TUHAR300PG	TUHAR300HG	TUHAR300SS	0.90
450mm	TUHAR450PG	TUHAR450HG	TUHAR450SS	1.29
600mm	TUHAR600PG	TUHAR600HG	TUHAR600SS	1.68
750mm	TUHAR750PG	TUHAR750HG	TUHAR750SS	3.34
900mm	TUHAR900PG	TUHAR900HG	TUHAR900SS	4.16

TM

## Fixed Risers

### Atkore Unistrut Risers

#### Fixed Inside Riser (IR)



#### Fixed Outside Riser (OR)



#### Fixed Risers (Heavy)

Size (W)	Part Code (Inside)	Part Code (Outside)	Weight
	HG	HG	kg
75mm	TUHIR075HG	TUHOR075HG	0.41
100mm	TUHIR100HG	TUHOR100HG	0.48
150mm	TUHIR150HG	TUHOR150HG	0.64
225mm	TUHIR225HG	TUHOR225HG	0.86
300mm	TUHIR300HG	TUHOR300HG	1.08
450mm	TUHIR450HG	TUHOR450HG	1.29
600mm	TUHIR600HG	TUHOR600HG	1.68
750mm	TUHIR750HG	TUHOR750HG	2.02
900mm	TUHIR900HG	X	4.99

## Atkore Unistrut Reducers

Product image may vary dependant on duty of fitting, finish and size.



Sold as  
Individual



### Light Cable Tray Reducer

Width	50mm	75mm	100mm	150mm	225mm	300mm	450mm	600mm	750mm	900mm
50mm		TULSR075/050	TULSR150/050	TULSR150/050						
75mm	TULSR075/050		TULSR100/075	TULSR150/075	TULSR225/075					
100mm	TULSR100/050	TULSR100/075		TULSR150/100	TULSR225/100	TULSR300/100	TULSR450/100			
150mm	TULSR150/050	TULSR150/075	TULSR150/100		TULSR225/150	TULSR300/150	TULSR450/150	TULSR600/150		
225mm		TULSR225/075	TULSR225/100	TULSR225/150		TULSR300/225	TULSR450/225	TULSR600/225	TULSR750/225	
300mm			TULSR300/100	TULSR300/150	TULSR300/225		TULSR450/300	TULSR600/300	TULSR750/300	TULSR900/300
450mm			TULSR450/100	TULSR450/150	TULSR450/225	TULSR450/300		TULSR600/450	TULSR750/450	TULSR900/450
600mm				TULSR600/150	TULSR600/225	TULSR600/300	TULSR600/450		TULSR750/600	TULSR900/600
750mm					TULSR750/225	TULSR750/300	TULSR750/450	TULSR750/600		TULSR900/750
900mm						TULSR900/300	TULSR900/450	TULSR900/600	TULSR900/750	

### Medium Cable Tray Reducer

Width	50mm	75mm	100mm	150mm	225mm	300mm	450mm	600mm	750mm	900mm
50mm		TUMSR075/050	TUMSR150/050	TUMSR150/050						
75mm	TUMSR075/050		TUMSR100/075	TUMSR150/075	TUMSR225/075					
100mm	TUMSR100/050	TUMSR100/075		TUMSR150/100	TUMSR225/100	TUMSR300/100	TUMSR450/100			
150mm	TUMSR150/050	TUMSR150/075	TUMSR150/100		TUMSR225/150	TUMSR300/150	TUMSR450/150	TUMSR600/150		
225mm		TUMSR225/075	TUMSR225/100	TUMSR225/150		TUMSR300/225	TUMSR450/225	TUMSR600/225	TUMSR750/225	
300mm			TUMSR300/100	TUMSR300/150	TUMSR300/225		TUMSR450/300	TUMSR600/300	TUMSR750/300	TUMSR900/300
450mm			TUMSR450/100	TUMSR450/150	TUMSR450/225	TUMSR450/300		TUMSR600/450	TUMSR750/450	TUMSR900/450
600mm				TUMSR600/150	TUMSR600/225	TUMSR600/300	TUMSR600/450		TUMSR750/600	TUMSR900/600
750mm					TUMSR750/225	TUMSR750/300	TUMSR750/450	TUMSR750/600		TUMSR900/750
900mm						TUMSR900/300	TUMSR900/450	TUMSR900/600	TUMSR900/750	

### Heavy Cable Tray Reducer

Width	50mm	75mm	100mm	150mm	225mm	300mm	450mm	600mm	750mm	900mm
50mm		TUHSR075/050	TUHSR150/050	TUHSR150/050						
75mm	TUHSR075/050		TUHSR100/075	TUHSR150/075	TUHSR225/075					
100mm	TUHSR100/050	TUHSR100/075		TUHSR150/100	TUHSR225/100	TUHSR300/100	TUHSR450/100			
150mm	TUHSR150/050	TUHSR150/075	TUHSR150/100		TUHSR225/150	TUHSR300/150	TUHSR450/150	TUHSR600/150		
225mm		TUHSR225/075	TUHSR225/100	TUHSR225/150		TUHSR300/225	TUHSR450/225	TUHSR600/225	TUHSR750/225	
300mm			TUHSR300/100	TUHSR300/150	TUHSR300/225		TUHSR450/300	TUHSR600/300	TUHSR750/300	TUHSR900/300
450mm			TUHSR450/100	TUHSR450/150	TUHSR450/225	TUHSR450/300		TUHSR600/450	TUHSR750/450	TUHSR900/450
600mm				TUHSR600/150	TUHSR600/225	TUHSR600/300	TUHSR600/450		TUHSR750/600	TUHSR900/600
750mm					TUHSR750/225	TUHSR750/300	TUHSR750/450	TUHSR750/600		TUHSR900/750
900mm						TUHSR900/300	TUHSR900/450	TUHSR900/600	TUHSR900/750	

Example: A 600mm Wide to 300mm Wide Cable Tray Reducer in Hot Galvanised Finish would be TULSR600/300HG


# Sizes, Angles & Codes

## Atkore Unistrut Part Code Guide


Atkore Unistrut fittings come in a wide variety of widths, radii and angles (where appropriate). Many of these are standard factory items and the rest are available upon request.

Unless specified, figures are in millimetres (mm)


### Light Duty



### Medium Duty



### Heavy Duty



Cable Tray

Code	Width
050	50mm
075	75mm
100	100mm
150	150mm
225	225mm
300	300mm
450	450mm
600	600mm
750	750mm
900	900mm

### Angles (D) - Fittings Only

Code	Angle
30	30
45	45
60	60
90	90

### Thickness (C) - Fittings Only

Code	Thickness
0.80	0.80mm
1.20	1.20mm
2.00	2.00mm

TM

### Atkore Unistrut Cable Tray Covers

Size (W)				Length
mm	HG	SS	PG	
50	TUHL050/HG	TUHL050/SS	TUHL050/PG	3m
75	TUHL075/HG	TUHL075/SS	TUHL075/PG	3m
100	TUHL100/HG	TUHL100/SS	TUHL100/PG	3m
150	TUHL150/HG	TUHL150/SS	TUHL150/PG	3m
225	TUHL225/HG	TUHL225/SS	TUHL225/PG	3m
300	TUHL300/HG	TUHL300/SS	TUHL300/PG	3m
450	TUHL450/HG	TUHL450/SS	TUHL450/PG	1.5m
600	TUHL600/HG	TUHL600/SS	TUHL600/PG	1.5m
750	TUHL750/HG	TUHL750/SS	TUHL750/PG	1.5m
900	TUHL900/HG	TUHL900/SS	TUHL900/PG	1.5m



Sold as  
Individual

### A cover for every fitting

Atkore Unistrut have custom fit covers for the entire range of lengths and fittings and can provide custom sizes if required for unique jobs. These are available upon demand.


### Ventilated Cover Clips

In addition to covers Atkore Unistrut also supply separately, the ventilated fitting equipment as detailed :

Part No.	Type	Duty	Finish
			Stainless Steel or Hot Galvanised
TUCM/VC	Ventilated	Medium	SS or HG
TUCM/CC	Closed	Medium	SS or HG
TUCH/VC	Ventilated	Heavy	SS or HG
TUCH/CC	Closed	Heavy	SS or HG

1.5m cover requires  
4 cover clips

3m cover requires  
6 cover clips

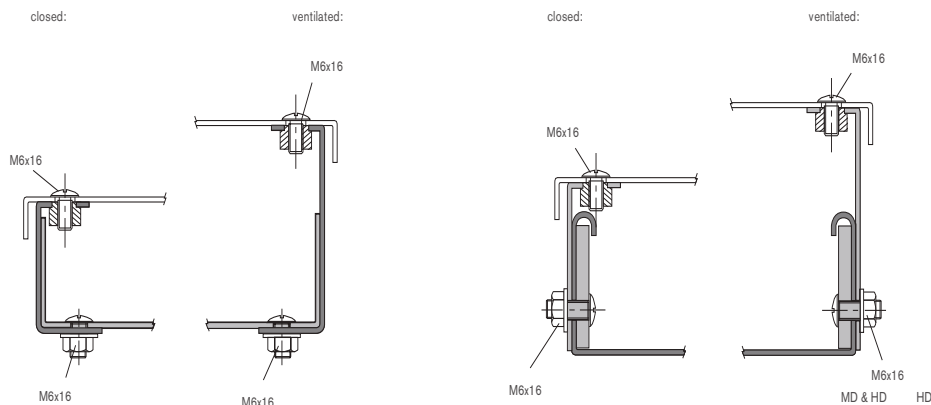

Cable Tray L

HG

Cable Tray M & Cable Tray H

HG

SS

# Couplers & Splices

## Atkore Unistrut Couplers & Splices

### Fish Plate (For Light Duty Cable Tray)



Sold as  
Individual

Size (W)	Part No.		
mm	PG	HG	SS
45	TULFP050PG	TULFP050HG	TULFP050SS
70	TULFP075PG	TULFP075HG	TULFP075SS
100	TULFP100PG	TULFP100HG	TULFP100SS
150	TULFP150PG	TULFP150HG	TULFP150SS
225	TULFP225PG	TULFP225HG	TULFP225SS
300	TULFP300PG	TULFP300HG	TULFP300SS
450	TULFP450PG	TULFP450HG	TULFP450SS
600	TULFP600PG	TULFP600HG	TULFP600SS
750	TULFP750PG	TULFP750HG	TULFP750SS
900	TULFP900PG	TULFP900HG	TULFP900SS

### Straight Splice



Sold as  
Pair

### Wrap Over Splice



Sold as  
Pair

### For Medium or Heavy Duty Cable Tray

Type	Finish		
	PG	HG	SS
Medium	TUM/SCPG	TUM/SCHG	TUMSC/SS
Heavy	TUH/SCPG	TUH/SCHG	TUHSC/SS
Extra Heavy	TUEH/SCPG	TUEH/SCHG	TUEHSC/SS
Extra Extra Heavy	TUXH/SCPG	TUXH/SCHG	TUXHSC/SS

### For Medium or Heavy Duty Cable Tray


Type	Finish		
	PG	HG	SS
Medium	TUM/WCPG	TUM/WCHG	TUM/WCSS
Heavy	TUH/WCPG	TUH/WCHG	TUH/WCSS
Extra Heavy	TUEH/WCPG	TUEH/WCHG	TUEH/WCSS
Extra Extra Heavy	TUXH/WCPG	TUXH/WCHG	TUXH/WCSS



## Brackets

### Atkore Unistrut Cable Tray Brackets

#### Traying Arms

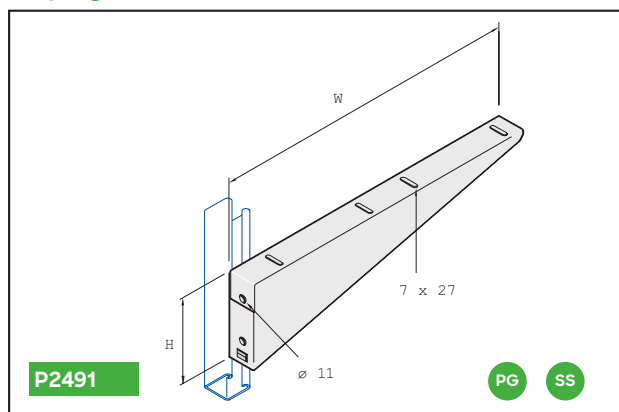


P2491

PG

SS

Part No.	Finishes PG SS	W mm	H mm	Fmax Kn		
P2491/100	• •	105	63	1.6	0.20	1
P2491/150	• •	155	63	1.6	0.28	1
P2491/225	• •	230	75	1.5	0.42	1
P2491/300	• •	305	87	1.4	0.60	1
P2491/450	• •	455	125	1.1	1.07	1
P2491/600	• •	605	164	1.0	1.63	1

#### Heavy Duty Tray Stand Off Bracket

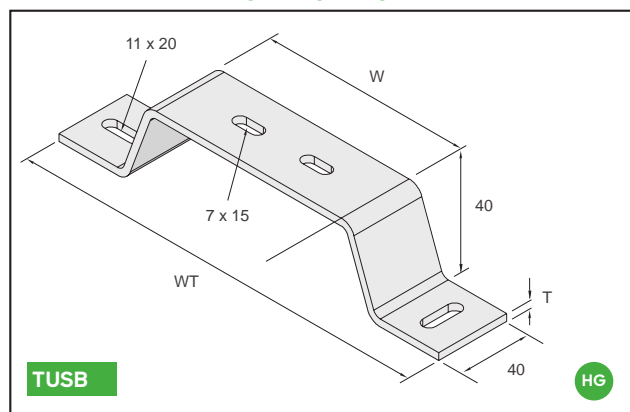


TUSB

HG

Part No.	Finishes HG	W mm	WT mm	T mm		
TUSB050	•	50	154	3	0.18	1
TUSB075	•	75	179	3	0.20	1
TUSB100	•	100	204	3	0.23	1
TUSB150	•	150	254	3	0.28	1
TUSB225	•	225	329	5	0.56	1
TUSB300	•	300	404	5	0.68	1
TUSB450	•	450	554	5	0.91	1
TUSB600	•	600	704	5	1.15	1

#### G-Type Hanging Bracket

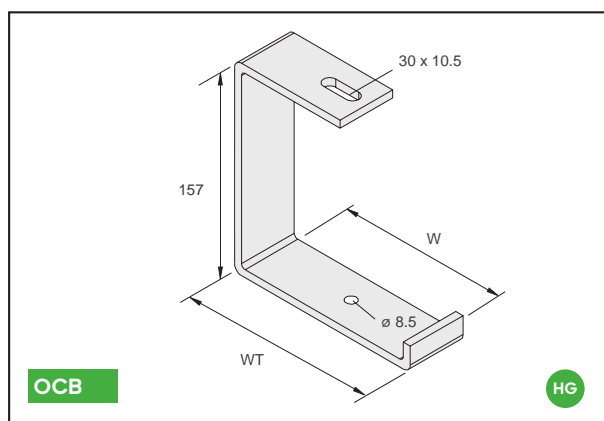


OCB

HG

Part No.	Finishes HG	W mm	WT mm		
OCB75	•	80	92	0.68	1
OCB100	•	105	117	0.73	1
OCB150	•	155	167	0.89	1
OCB225	•	230	242	1.14	1
OCB300	•	305	317	1.38	1

#### Hold Down Bracket

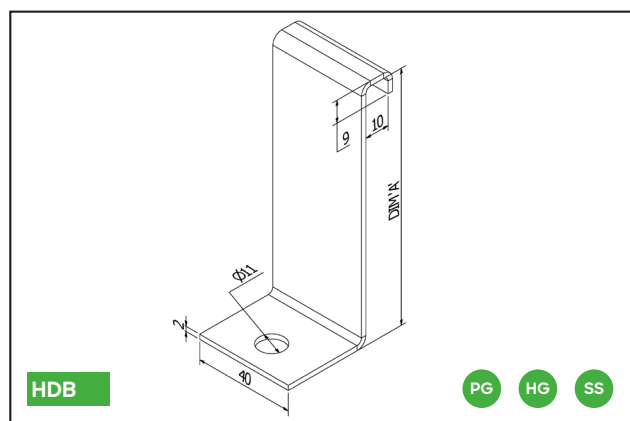

HDB

PG

HG

SS

Part No.	Finishes HG PG SS	W mm	H mm		
TUEH/HDB	•	40	100.5	0.09	1
TUEH/HDB	•	40	100.5	0.09	1
TUEH/HDB	•	40	100.5	0.11	1
TUH/HDB	•	40	50.5	0.06	1
TUH/HDB	•	40	50.5	0.06	1
TUH/HDB	•	40	50.5	0.07	1
TUM/HDB	•	40	25.5	0.05	1
TUM/HDB	•	40	25.5	0.05	1
TUM/HDB	•	40	25.5	0.06	1

Stated loadings apply to mild steel products only.

## Other Accessories

### Atkore Unistrut Cable Tray Accessories

#### Dividers



Sold as  
Individual

Duty	Finish		
	PG	HG	SS
Medium	TUM/SDPG	TUMSD/HG	TUMSD/SS
Heavy	TUH/SDPG	TUHSD/HG	TUHSD/SS


#### Earth Continuity Connector



Sold as  
Individual

Size (L)	Part No.	Weight
100mm	EB100	0.87

#### Overhead Cantilever Bracket



Sold as  
Individual

Part no.	Qty	Finish
OCBL050	1	PG
OCBL075	1	PG
OCBL100	1	PG
OCBL150	1	PG
OCBL225	1	PG
OCBL300	1	PG

#### Stand off Brackets




Sold as  
Individual

Part no.	Qty	Finish
TUTSB050PG	1	PG
TUTSB075PG	1	PG
TUTSB100PG	1	PG
TUTSB150PG	1	PG
TUTSB225PG	1	PG
TUTSB300PG	1	PG

# Loading Data

## Atkore Unistrut Cable Tray Brackets

### Loading Data

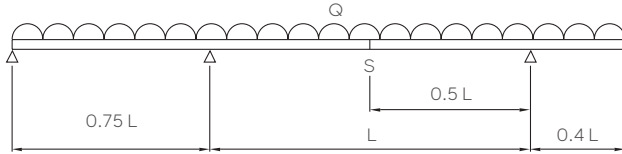

Load test according to CEI/IEC 61537:2001

$Q$  = UDL (uniformly distributed load)

Safety Factor = 1.7

$L$  = intermediate span

$F$  = deflection =  $1/100$  of the intermediate span (max.)

$S$  = splice location


Atkore Unistrut's load testing is in accordance with CEI/IEC 61537:2001. In practical terms this covers continuous/multi span installations, evenly loaded along the length of, and across the full width of the tray. The end spans in these installations should be reduced to 0.75 of the intermediate spans.

Deflection: Atkore Unistrut's load and deflection figures are in accordance with CEI/IEC 61537:2001, with the characteristic deflection of Atkore Unistrut Cable Tray limited to span/100 and load figures inclusive of a safety factor of 1.7.


Accessories: To ensure adequate support, accessories should be supported locally.

Couplers: The loading and deflection tables for Atkore Unistrut Cable Tray assume that the couplers are located at the most onerous position within the span (i.e. mid span). To maintain the load/deflection figures stated in the tables, the couplers should not be located in end spans or over support locations. Straight couplers were utilised for the testing of the medium and heavy duty Cable Trays. Only one pair of couplers should be installed per span.


### Light Duty Cable Tray

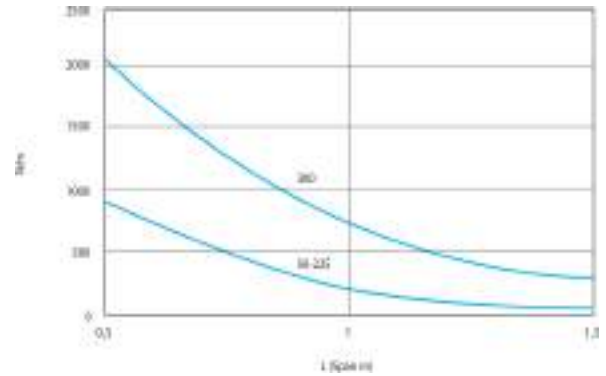

### Medium Duty Cable Tray

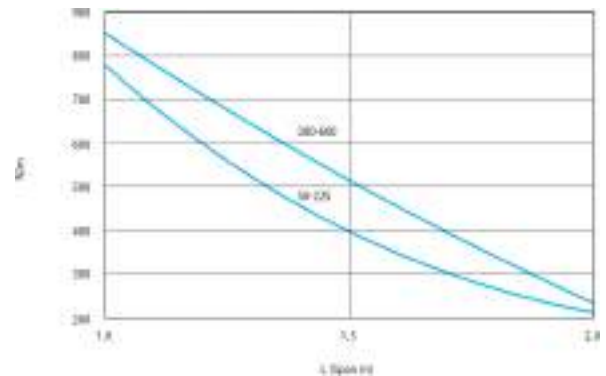

### Heavy Duty Cable Tray

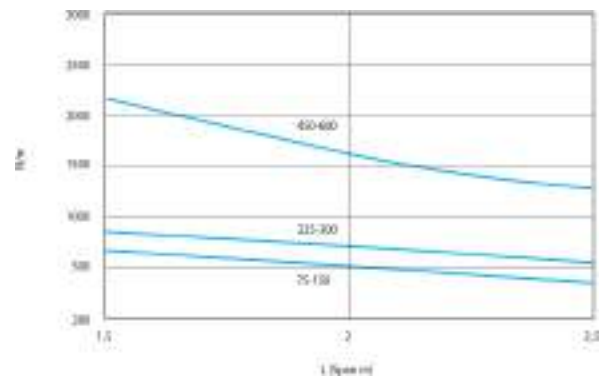

# Cable Trays - Information

## Atkore Unistrut Cable Tray Information

### Materials and Finishes

#### Pre-Galvanised [PG]

Cable Trays, brackets and fittings can be Pre-Galvanised. Pre-Galvanising is to BS EN 10346 2009 (Coating Z275).

#### Hot-Dip Galvanised [HG]

Cable Trays, brackets, cantilever arms and fittings can be Hot-Dip Galvanised in accordance with BS EN ISO1461:2009 and chromate passivated.

The minimum average Zinc Coating is as follows:

- Cold rolled from 1.5mm Steel – 55 microns
- Fittings spun galvanised – 45 microns

#### Stainless Steel [SS]

- Stainless Steel 1.4301 (304)
- Stainless Steel 1.4404 (316L)
- Cleaned (Pickled & Passivated)

Applying a pickling process to stainless steel results in a clean product and it also removes any heat discoloration that has occurred in the welding process.

### SPECIAL COATINGS AND MATERIAL GRADES ARE AVAILABLE ON REQUEST

### Certification and Quality Standards

ISO 9001 - Quality system certification

ISO 14001 - Environment certification

ISO45001 - Health and safety certification

### Useful Cross Section - Unistrut Tray

#### Light Duty (L)

Width	Useful cross section
mm	(cm <sup>2</sup> )
50	5.4
75	8.1
100	10.9
150	16.6
225	24.9
300	49.9
450	75.1
600	95.3
750	119.3
900	143.3

#### Medium Duty (M-25)

Width	Useful cross section
mm	(cm <sup>2</sup> )
50	11.4
75	17.4
100	23.5
150	35.6
225	53.7
300	70.4
450	106.1
600	141.8
750	171.1
900	205.6

#### Heavy Duty (H-50)

Width	Useful cross section
mm	(cm <sup>2</sup> )
75	35.8
100	48.1
150	72.7
225	108.2
300	144.8
450	213.6
600	285.6
750	357.6
900	429.6

Stated loadings apply to mild steel products only.

Pickle & Passivate is available upon request

## Atkore Unistrut Cable Ladder Solutions

### U10 - Medium Duty

Medium Duty 100mm high cable ladder for the tougher application and complete with a wide range of accessories and fixings to suit.

Available in 3 or 6m lengths with widths from 100 to 1200mm, in [HG] Hot-Dip Galvanised and [SS] Stainless Steel finishes.

Typical loading on with a 3m support span of approx 235kg/m.



### U12 - Heavy Duty

Heavy Duty 125mm high cable ladder, designed for applications which require a stronger and more rigid solution, complete with a wide range of accessories and fixings to suit.

Available in 3 or 6m lengths with widths from 100 to 1200mm, in [HG] Hot-Dip Galvanised and [SS] Stainless Steel finishes.

Typical loading on with a 3m support span of approx 357kg/m.

### U15 - Extra Heavy Duty

Extra Heavy Duty 150mm high cable ladder intended for use in applications which require additional strengths and reliability. Complete with a wide range of accessories and fittings, the Extra Heavy Duty Cable Ladder is supplied in 3 or 6m lengths and is available in a number of finishes, including [HG] Hot-Dip Galvanised and [SS] Stainless Steel.

Typical loading on with a 3m support span of approx 449kg/m.



TM

# Tables & Keys

## Cable Ladder Tables & Keys Guide

### Material Finish (Straights and Fittings)

Finish	Code
Pre-Galvanised	PG
Hot Dipped Galvanised	HG
Stainless Steel	SS



### Icon Key - Features



Including Fitments



Sold as Pair



Sold as Individual

### Width and Angle Codes

Standard Widths (W)		By Request		Radii (R)			Angles (D)		By Request
Code	Width			Code	Width		Width	Angle	
10	100mm	By Request		30	300mm*		30	30	By Request
15	150mm			45	450mm		45	45	
20	200mm	By Request		60	600mm		60	60	By Request
30	300mm			75	750mm		90	90	
40	400mm	By Request		90	900mm				
45	450mm								
50	500mm	By Request							
60	600mm								
70	700mm	By Request							
75	750mm								
80	800mm	By Request							
90	900mm								
100	1000mm	By Request							

\*Standard

# Cable Ladders

## Atkore Unistrut Cable Ladder Solutions

### Key Features



Atkore Unistrut's Cable Ladder systems are renowned around the world for quality and engineering excellence. Wherever severe corrosion conditions are present, or a long maintenance free life is required, Atkore Unistrut's welded steel Cable Ladder systems are the obvious choice. Atkore Unistrut manufactures a complete range of Cable Ladder systems for a wide range of load and span combinations to suit the requirements of almost any installation.

Cable Ladders are selected because of their heavy load carrying capacities and the excellent performance they give in harsh environments where salt spray or salt laden atmosphere, and other mild corrosive materials are present. Applications such as Oil & Gas, Petrochemical, tunnels, port facilities and anything else you can imagine.

Supplied in **medium**, **heavy** and **extra heavy duty** sizes.

Available in standard finishes of [PG] Pre-Galvanised, [HG] Hot-Dip Galvanised and [SS] Stainless Steel, but also Specialist Finishes are available on request.

Engineered to maximise long span runs where support installation is limited.

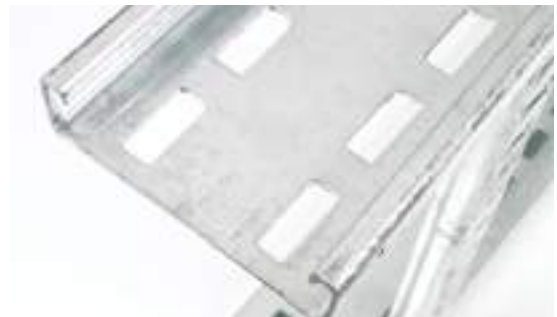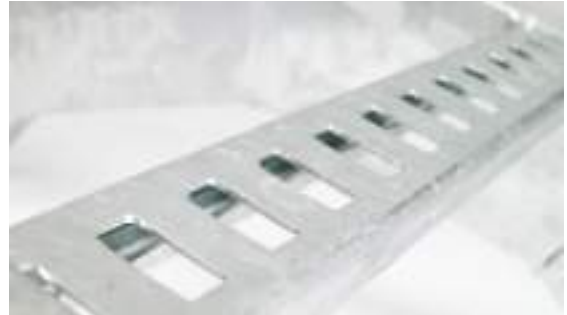

## U10 - Medium Duty

Medium Duty Cable Ladder

### L3 and L6 Cable Ladder




Size (W)	U10 L3 (3 metre Length)				U10 L6 (6 metre Length)			
	Product Code			Weight	Product Code			Weight
mm	HG	PG	SS	kg	HG	PG	SS	kg
100	U10L3100H	U10L3100PG	U10L3100S	13.2	U10L6100H	U10L6100PG	U10L6100S	26.53
150	U10L3150H	U10L3150PG	U10L3150S	13.8	U10L6150H	U10L6150PG	U10L6150S	27.67
200	U10L3200H	U10L3200PG	U10L3200S	14.4	U10L6200H	U10L6200PG	U10L6200S	28.81
300	U10L3300H	U10L3300PG	U10L3300S	15.55	U10L6300H	U10L6300PG	U10L6300S	31.10
400	U10L3400H	U10L3400PG	U10L3400S	16.69	U10L6400H	U10L6400PG	U10L6400S	33.39
450	U10L3450H	U10L3450PG	U10L3450S	17.27	U10L6450H	U10L6450PG	U10L6450S	34.53
500	U10L3500H	U10L3500PG	U10L3500S	17.84	U10L6500H	U10L6500PG	U10L6500S	35.68
600	U10L3600H	U10L3600PG	U10L3600S	18.98	U10L6600H	U10L6600PG	U10L6600S	37.97
700	U10L3700H	U10L3700PG	U10L3700S	22.13	U10L6700H	U10L6700PG	U10L6700S	44.25
750	U10L3750H	U10L3750PG	U10L3750S	22.84	U10L6750H	U10L6750PG	U10L6750S	45.68
800	U10L3800H	U10L3800PG	U10L3800S	23.55	U10L6800H	U10L6800PG	U10L6800S	47.11
900	U10L3900H	U10L3900PG	U10L3900S	24.98	U10L6900H	U10L6900PG	U10L6900S	49.97
1000	U10L31000H	U10L31000PG	U10L31000S	26.41	U10L61000H	U10L61000PG	U10L61000S	52.83



# U12 - Heavy Duty

## Heavy Duty Cable Ladder

### L3 and L6 Cable Ladder

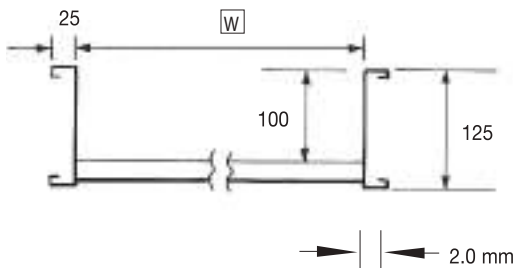


Sold as  
Individual

Size (W) mm	U12 L3 (3 metre Length)				U12 L6 (6 metre Length)			
	HG	PG	SS	Weight kg	HG	PG	SS	Weight kg
100	U12L3100H	U12L3100PG	U12L3100S	18.89	U12L6100H	U12L6100PG	U12L6100S	38.22
150	U12L3150H	U12L3150PG	U12L3150S	19.68	U12L6150H	U12L6150PG	U12L6150S	39.37
200	U12L3200H	U12L3200PG	U12L3200S	20.25	U12L6200H	U12L6200PG	U12L6200S	40.51
300	U12L3300H	U12L3300PG	U12L3300S	21.40	U12L6300H	U12L6300PG	U12L6300S	42.80
400	U12L3400H	U12L3400PG	U12L3400S	22.54	U12L6400H	U12L6400PG	U12L6400S	44.54
450	U12L3450H	U12L3450PG	U12L3450S	23.11	U12L6450H	U12L6450PG	U12L6450S	46.23
500	U12L3500H	U12L3500PG	U12L3500S	23.69	U12L6500H	U12L6500PG	U12L6500S	47.38
600	U12L3600H	U12L3600PG	U12L3600S	24.83	U12L6600H	U12L6600PG	U12L6600S	49.66
700	U12L3700H	U12L3700PG	U12L3700S	27.97	U12L6700H	U12L6700PG	U12L6700S	55.95
750	U12L3750H	U12L3750PG	U12L3750S	28.69	U12L6750H	U12L6750PG	U12L6750S	57.28
800	U12L3800H	U12L3800PG	U12L3800S	29.40	U12L6800H	U12L6800PG	U12L6800S	58.81
900	U12L3900H	U12L3900PG	U12L3900S	30.83	U12L6900H	U12L6900PG	U12L6900S	61.67
1000	U12L31000H	U12L31000PG	U12L31000S	32.26	U12L61000H	U12L61000PG	U12L61000S	64.53

## U15 - Extra Heavy Duty

Extra Heavy Duty Cable Ladder

### L3 and L6 Cable Ladder

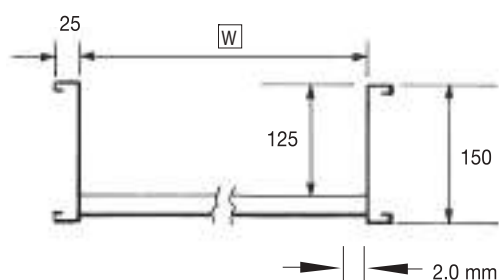

Sold as  
Individual

Size (W) mm	U15 L3 (3 metre Length)				U15 L6 (6 metre Length)			
	Product Code			Weight	Product Code			Weight
	HG	PG	SS	kg	HG	PG	SS	kg
100	U15L3100H	U15L3100PG	U15L3100S	21.56	U15L6100H	U15L6100PG	U15L6100S	42.48
150	U15L3150H	U15L3150PG	U15L3150S	22.14	U15L6150H	U15L6150PG	U15L6150S	44.27
200	U15L3200H	U15L3200PG	U15L3200S	22.71	U15L6200H	U15L6200PG	U15L6200S	45.42
300	U15L3300H	U15L3300PG	U15L3300S	23.85	U15L6300H	U15L6300PG	U15L6300S	47.41
400	U15L3400H	U15L3400PG	U15L3400S	25	U15L6400H	U15L6400PG	U15L6400S	49.24
450	U15L3450H	U15L3450PG	U15L3450S	25.57	U15L6450H	U15L6450PG	U15L6450S	51.14
500	U15L3500H	U15L3500PG	U15L3500S	26.14	U15L6500H	U15L6500PG	U15L6500S	52.28
600	U15L3600H	U15L3600PG	U15L3600S	27.28	U15L6600H	U15L6600PG	U15L6600S	54.57
700	U15L3700H	U15L3700PG	U15L3700S	30.43	U15L6700H	U15L6700PG	U15L6700S	60.87
750	U15L3750H	U15L3750PG	U15L3750S	31.14	U15L6750H	U15L6750PG	U15L6750S	62.29
800	U15L3800H	U15L3800PG	U15L3800S	31.86	U15L6800H	U15L6800PG	U15L6800S	63.72
900	U15L3900H	U15L3900PG	U15L3900S	33.29	U15L6900H	U15L6900PG	U15L6900S	66.58
1000	U15L31000H	U15L31000PG	U15L31000S	34.72	U15L61000H	U15L61000PG	U15L61000S	69.44

# 45° Flat Bend



Sold as  
Individual

## U10 45° Flat Bends

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10FB10/45/30H	U10FB10/45/30S	1.9
150	U10FB15/45/30H	U10FB15/45/30S	2.1
200	U10FB20/45/30H	U10FB20/45/30S	2.3
300	U10FB30/45/30H	U10FB30/45/30S	2.7
400	U10FB40/45/30H	U10FB40/45/30S	3.1
450	U10FB45/45/30H	U10FB45/45/30S	3.3
500	U10FB50/45/30H	U10FB50/45/30S	3.5
600	U10FB60/45/30H	U10FB60/45/30S	3.9
700	U10FB70/45/30H	U10FB70/45/30S	5.7
750	U10FB75/45/30H	U10FB75/45/30S	6
800	U10FB80/45/30H	U10FB80/45/30S	6.3
900	U10FB90/45/30H	U10FB90/45/30S	6.9
1000	U10FB100/45/30H	U10FB100/45/30S	7.5

## U12 45° Flat Bends

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12FB10/45/30H	U12FB10/45/30S	2.7
150	U12FB15/45/30H	U12FB15/45/30S	3
200	U12FB20/45/30H	U12FB20/45/30S	3.2
300	U12FB30/45/30H	U12FB30/45/30S	3.7
400	U12FB40/45/30H	U12FB40/45/30S	4
450	U12FB45/45/30H	U12FB45/45/30S	4.4
500	U12FB50/45/30H	U12FB50/45/30S	4.9
600	U12FB60/45/30H	U12FB60/45/30S	5
700	U12FB70/45/30H	U12FB70/45/30S	6.8
750	U12FB75/45/30H	U12FB75/45/30S	7.2
800	U12FB80/45/30H	U12FB80/45/30S	7.5
900	U12FB90/45/30H	U12FB90/45/30S	8.1
1000	U12FB100/45/30H	U12FB100/45/30S	8.8

## U15 45° Flat Bends

Size (W) mm	Part No.		Weight
	HG	SS	
100	U15FB10/45/30H	U15FB10/45/30S	3
150	U15FB15/45/30H	U15FB15/45/30S	3.3
200	U15FB20/45/30H	U15FB20/45/30S	3.5
300	U15FB30/45/30H	U15FB30/45/30S	4
400	U15FB40/45/30H	U15FB40/45/30S	4.2
450	U15FB45/45/30H	U15FB45/45/30S	4.8
500	U15FB50/45/30H	U15FB50/45/30S	5
600	U15FB60/45/30H	U15FB60/45/30S	5.5
700	U15FB70/45/30H	U15FB70/45/30S	7.4
750	U15FB75/45/30H	U15FB75/45/30S	7.7
800	U15FB80/45/30H	U15FB80/45/30S	8.1
900	U15FB90/45/30H	U15FB90/45/30S	8.7
1000	U15FB100/45/30H	U15FB100/45/30S	9.4

Different radius\* available upon request

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
**Unistrut**



# 90° Flat Bend

## Cable Ladder Flat Bends



Sold as  
Individual

### U10 90° Flat Bends

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10FB10/90/30H	U10FB10/90/30S	3.2
150	U10FB15/90/30H	U10FB15/90/30S	3.5
200	U10FB20/90/30H	U10FB20/90/30S	3.9
300	U10FB30/90/30H	U10FB30/90/30S	4.5
400	U10FB40/90/30H	U10FB40/90/30S	5.7
450	U10FB45/90/30H	U10FB45/90/30S	6.1
500	U10FB50/90/30H	U10FB50/90/30S	6.5
600	U10FB60/90/30H	U10FB60/90/30S	7.3
700	U10FB70/90/30H	U10FB70/90/30S	8.8
750	U10FB75/90/30H	U10FB75/90/30S	10.41
800	U10FB80/90/30H	U10FB80/90/30S	10.93
900	U10FB90/90/30H	U10FB90/90/30S	11.98
1000	U10FB100/90/30H	U10FB100/90/30S	13.05

### U12 90° Flat Bends

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12FB10/90/30H	U12FB10/90/30S	4.6
150	U12FB15/90/30H	U12FB15/90/30S	5
200	U12FB20/90/30H	U12FB20/90/30S	5.4
300	U12FB30/90/30H	U12FB30/90/30S	6.3
400	U12FB40/90/30H	U12FB40/90/30S	7.3
450	U12FB45/90/30H	U12FB45/90/30S	8
500	U12FB50/90/30H	U12FB50/90/30S	8.5
600	U12FB60/90/30H	U12FB60/90/30S	9.2
700	U12FB70/90/30H	U12FB70/90/30S	11.2
750	U12FB75/90/30H	U12FB75/90/30S	12.8
800	U12FB80/90/30H	U12FB80/90/30S	13.4
900	U12FB90/90/30H	U12FB90/90/30S	14.6
1000	U12FB100/90/30H	U12FB100/90/30S	15.8

### U15 90° Flat Bends

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15FB10/90/30H	U15FB10/90/30S	5.1
150	U15FB15/90/30H	U15FB15/90/30S	5.5
200	U15FB20/90/30H	U15FB20/90/30S	5.9
300	U15FB30/90/30H	U15FB30/90/30S	6.8
400	U15FB40/90/30H	U15FB40/90/30S	7.7
450	U15FB45/90/30H	U15FB45/90/30S	8.6
500	U15FB50/90/30H	U15FB50/90/30S	9.1
600	U15FB60/90/30H	U15FB60/90/30S	10.1
700	U15FB70/90/30H	U15FB70/90/30S	11.9
750	U15FB75/90/30H	U15FB75/90/30S	13.49
800	U15FB80/90/30H	U15FB80/90/30S	14.11
900	U15FB90/90/30H	U15FB90/90/30S	15.34
1000	U15FB100/90/30H	U15FB100/90/30S	16.58

Different radius' available upon request

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut

# Tee

## Cable Ladder Tee



Sold as Individual

### U10 Tee

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10ET10/10/30H	U10ET10/10/30S	5.3
150	U10ET15/15/30H	U10ET15/15/30S	5.7
200	U10ET20/20/30H	U10ET20/20/30S	6.1
300	U10ET30/30/30H	U10ET30/30/30S	7.7
400	U10ET40/40/30H	U10ET40/40/30S	8.7
450	U10ET45/45/30H	U10ET45/45/30S	9.2
500	U10ET50/50/30H	U10ET50/50/30S	9.7
600	U10ET60/60/30H	U10ET60/60/30S	10.7
700	U10ET70/70/30H	U10ET70/70/30S	14.2
750	U10ET75/75/30H	U10ET75/75/30S	14.9
800	U10ET80/80/30H	U10ET80/80/30S	15.5
900	U10ET90/90/30H	U10ET90/90/30S	16.9
1000	U10ET100/100/30H	U10ET100/100/30S	17.2

### U12 Tee

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12ET10/10/30H	U12ET10/10/30S	8.2
150	U12ET15/15/30H	U12ET15/15/30S	7.6
200	U12ET20/20/30H	U12ET20/20/30S	8.1
300	U12ET30/30/30H	U12ET30/30/30S	9.7
400	U12ET40/40/30H	U12ET40/40/30S	10.7
450	U12ET45/45/30H	U12ET45/45/30S	11.3
500	U12ET50/50/30H	U12ET50/50/30S	11.8
600	U12ET60/60/30H	U12ET60/60/30S	12.9
700	U12ET70/70/30H	U12ET70/70/30S	16.4
750	U12ET75/75/30H	U12ET75/75/30S	17.1
800	U12ET80/80/30H	U12ET80/80/30S	17.8
900	U12ET90/90/30H	U12ET90/90/30S	19.2
1000	U12ET100/100/30H	U12ET100/100/30S	20.2

### U15 Tee

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15ET10/10/30H	U15ET10/10/30S	8.1
150	U15ET15/15/30H	U15ET15/15/30S	8.5
200	U15ET20/20/30H	U15ET20/20/30S	8.9
300	U15ET30/30/30H	U15ET30/30/30S	10.6
400	U15ET40/40/30H	U15ET40/40/30S	11.7
450	U15ET45/45/30H	U15ET45/45/30S	12.3
500	U15ET50/50/30H	U15ET50/50/30S	12.8
600	U15ET60/60/30H	U15ET60/60/30S	13.9
700	U15ET70/70/30H	U15ET70/70/30S	17.5
750	U15ET75/75/30H	U15ET75/75/30S	18.2
800	U15ET80/80/30H	U15ET80/80/30S	19.0
900	U15ET90/90/30H	U15ET90/90/30S	20.0
1000	U15ET100/100/30H	U15ET100/100/30S	21.5

Unequal Tee's available upon request

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
**Unistrut**



# Cross

## Cable Ladder Cross



Sold as  
Individual

### U10 Cross

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10EC10/10/30H	U10EC10/10/30S	7.2
150	U10EC15/15/30H	U10EC15/15/30S	7.4
200	U10EC20/20/30H	U10EC20/20/30S	7.8
300	U10EC30/30/30H	U10EC30/30/30S	9.9
400	U10EC40/40/30H	U10EC40/40/30S	9.9
450	U10EC45/45/30H	U10EC45/45/30S	11.6
500	U10EC50/50/30H	U10EC50/50/30S	12.21
600	U10EC60/60/30H	U10EC60/60/30S	13.36
700	U10EC70/70/30H	U10EC70/70/30S	17.76
750	U10EC75/75/30H	U10EC75/75/30S	18.55
800	U10EC80/80/30H	U10EC80/80/30S	14.37
900	U10EC90/90/30H	U10EC90/90/30S	15.40
1000	U10EC100/100/30H	U10EC100/100/30S	16.40

### U12 Cross

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12EC10/10/30H	U12EC10/10/30S	10.4
150	U12EC15/15/30H	U12EC15/15/30S	9.6
200	U12EC20/20/30H	U12EC20/20/30S	9.9
300	U12EC30/30/30H	U12EC30/30/30S	12
400	U12EC40/40/30H	U12EC40/40/30S	13.1
450	U12EC45/45/30H	U12EC45/45/30S	13.6
500	U12EC50/50/30H	U12EC50/50/30S	14.2
600	U12EC60/60/30H	U12EC60/60/30S	15.3
700	U12EC70/70/30H	U12EC70/70/30S	17.2
750	U12EC75/75/30H	U12EC75/75/30S	18.7
800	U12EC80/80/30H	U12EC80/80/30S	19.4
900	U12EC90/90/30H	U12EC90/90/30S	20.7
1000	U12EC100/100/30H	U12EC100/100/30S	21.9

### U15 Cross

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15EC10/10/30H	U15EC10/10/30S	-
150	U15EC15/15/30H	U15EC15/15/30S	10.62
200	U15EC20/20/30H	U15EC20/20/30S	11
300	U15EC30/30/30H	U15EC30/30/30S	13
400	U15EC40/40/30H	U15EC40/40/30S	14.1
450	U15EC45/45/30H	U15EC45/45/30S	14.6
500	U15EC50/50/30H	U15EC50/50/30S	15.2
600	U15EC60/60/30H	U15EC60/60/30S	16.3
700	U15EC70/70/30H	U15EC70/70/30S	18.3
750	U15EC75/75/30H	U15EC75/75/30S	19.8
800	U15EC80/80/30H	U15EC80/80/30S	20.5
900	U15EC90/90/30H	U15EC90/90/30S	21.7
1000	U15EC100/100/30H	U15EC100/100/30S	23.1

Different radius' available upon request

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut

# 45° Outside Riser

## Cable Ladder Risers



Sold as Individual

### U10 45° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10OR10/45/30H	U10OR10/45/30S	1.8
150	U10OR15/45/30H	U10OR15/45/30S	2.3
200	U10OR20/45/30H	U10OR20/45/30S	2.5
300	U10OR30/45/30H	U10OR30/45/30S	2.7
400	U10OR40/45/30H	U10OR40/45/30S	2.9
450	U10OR45/45/30H	U10OR45/45/30S	3
500	U10OR50/45/30H	U10OR50/45/30S	3.2
600	U10OR60/45/30H	U10OR60/45/30S	3.4
700	U10OR70/45/30H	U10OR70/45/30S	4
750	U10OR75/45/30H	U10OR75/45/30S	4.1
800	U10OR80/45/30H	U10OR80/45/30S	4.3
900	U10OR90/45/30H	U10OR90/45/30S	4.6
1000	U10OR100/45/30H	U10OR100/45/30S	4.9

### U12 45° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12OR10/45/30H	U12OR10/45/30S	3.3
150	U12OR15/45/30H	U12OR15/45/30S	3.4
200	U12OR20/45/30H	U12OR20/45/30S	3.5
300	U12OR30/45/30H	U12OR30/45/30S	3.7
400	U12OR40/45/30H	U12OR40/45/30S	3.9
450	U12OR45/45/30H	U12OR45/45/30S	4.1
500	U12OR50/45/30H	U12OR50/45/30S	4.2
600	U12OR60/45/30H	U12OR60/45/30S	4.4
700	U12OR70/45/30H	U12OR70/45/30S	5
750	U12OR75/45/30H	U12OR75/45/30S	5.2
800	U12OR80/45/30H	U12OR80/45/30S	5.3
900	U12OR90/45/30H	U12OR90/45/30S	5.6
1000	U12OR100/45/30H	U12OR100/45/30S	5.9

### U15 45° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15OR10/45/30H	U15OR10/45/30S	4
150	U15OR15/45/30H	U15OR15/45/30S	4.1
200	U15OR20/45/30H	U15OR20/45/30S	4.2
300	U15OR30/45/30H	U15OR30/45/30S	4.4
400	U15OR40/45/30H	U15OR40/45/30S	4.6
450	U15OR45/45/30H	U15OR45/45/30S	4.8
500	U15OR50/45/30H	U15OR50/45/30S	4.9
600	U15OR60/45/30H	U15OR60/45/30S	5.1
700	U15OR70/45/30H	U15OR70/45/30S	5.7
750	U15OR75/45/30H	U15OR75/45/30S	5.9
800	U15OR80/45/30H	U15OR80/45/30S	6
900	U15OR90/45/30H	U15OR90/45/30S	6.3
1000	U15OR100/45/30H	U15OR100/45/30S	6.6

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut



# 90° Outside Riser

## Cable Ladder Risers



Sold as  
Individual

### U10 90° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10OR10/90/30H	U10OR10/90/30S	2.5
150	U10OR15/90/30H	U10OR15/90/30S	2.6
200	U10OR20/90/30H	U10OR20/90/30S	2.7
300	U10OR30/90/30H	U10OR30/90/30S	3
400	U10OR40/90/30H	U10OR40/90/30S	3.2
450	U10OR45/90/30H	U10OR45/90/30S	3.3
500	U10OR50/90/30H	U10OR50/90/30S	3.4
600	U10OR60/90/30H	U10OR60/90/30S	3.7
700	U10OR70/90/30H	U10OR70/90/30S	4.3
750	U10OR75/90/30H	U10OR75/90/30S	4.4
800	U10OR80/90/30H	U10OR80/90/30S	4.6
900	U10OR90/90/30H	U10OR90/90/30S	4.9
1000	U10OR100/90/30H	U10OR100/90/30S	5.03

### U12 90° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12OR10/90/30H	U12OR10/90/30S	3.8
150	U12OR15/90/30H	U12OR15/90/30S	3.9
200	U12OR20/90/30H	U12OR20/90/30S	4
300	U12OR30/90/30H	U12OR30/90/30S	4.2
400	U12OR40/90/30H	U12OR40/90/30S	4.4
450	U12OR45/90/30H	U12OR45/90/30S	4.5
500	U12OR50/90/30H	U12OR50/90/30S	4.6
600	U12OR60/90/30H	U12OR60/90/30S	4.9
700	U12OR70/90/30H	U12OR70/90/30S	5.5
750	U12OR75/90/30H	U12OR75/90/30S	5.6
800	U12OR80/90/30H	U12OR80/90/30S	5.8
900	U12OR90/90/30H	U12OR90/90/30S	6
1000	U12OR100/90/30H	U12OR100/90/30S	6.3

### U15 90° Outside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15OR10/90/30H	U15OR10/90/30S	4.6
150	U15OR15/90/30H	U15OR15/90/30S	4.7
200	U15OR20/90/30H	U15OR20/90/30S	4.8
300	U15OR30/90/30H	U15OR30/90/30S	5
400	U15OR40/90/30H	U15OR40/90/30S	5.2
450	U15OR45/90/30H	U15OR45/90/30S	5.3
500	U15OR50/90/30H	U15OR50/90/30S	5.5
600	U15OR60/90/30H	U15OR60/90/30S	5.7
700	U15OR70/90/30H	U15OR70/90/30S	6.3
750	U15OR75/90/30H	U15OR75/90/30S	6.4
800	U15OR80/90/30H	U15OR80/90/30S	6.6
900	U15OR90/90/30H	U15OR90/90/30S	6.9
1000	U15OR100/90/30H	U15OR100/90/30S	10.26

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut



# 45° Inside Riser

## Cable Ladder Risers



Sold as Individual

### U10 45° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10IR10/45/30H	U10IR10/45/30S	1.8
150	U10IR15/45/30H	U10IR15/45/30S	2.3
200	U10IR20/45/30H	U10IR20/45/30S	2.5
300	U10IR30/45/30H	U10IR30/45/30S	2.7
400	U10IR40/45/30H	U10IR40/45/30S	2.9
450	U10IR45/45/30H	U10IR45/45/30S	3
500	U10IR50/45/30H	U10IR50/45/30S	3.2
600	U10IR60/45/30H	U10IR60/45/30S	3.4
700	U10IR70/45/30H	U10IR70/45/30S	4
750	U10IR75/45/30H	U10IR75/45/30S	4.1
800	U10IR80/45/30H	U10IR80/45/30S	4.3
900	U10IR90/45/30H	U10IR90/45/30S	4.6
1000	U10IR100/45/30H	U10IR100/45/30S	4.9

### U12 45° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12IR10/45/30H	U12IR10/45/30S	3.3
150	U12IR15/45/30H	U12IR15/45/30S	3.4
200	U12IR20/45/30H	U12IR20/45/30S	3.5
300	U12IR30/45/30H	U12IR30/45/30S	3.7
400	U12IR40/45/30H	U12IR40/45/30S	3.9
450	U12IR45/45/30H	U12IR45/45/30S	4.1
500	U12IR50/45/30H	U12IR50/45/30S	4.2
600	U12IR60/45/30H	U12IR60/45/30S	4.4
700	U12IR70/45/30H	U12IR70/45/30S	5
750	U12IR75/45/30H	U12IR75/45/30S	5.2
800	U12IR80/45/30H	U12IR80/45/30S	5.3
900	U12IR90/45/30H	U12IR90/45/30S	5.6
1000	U12IR100/45/30H	U12IR100/45/30S	5.9

### U15 45° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15IR10/45/30H	U15IR10/45/30S	4
150	U15IR15/45/30H	U15IR15/45/30S	4.1
200	U15IR20/45/30H	U15IR20/45/30S	4.2
300	U15IR30/45/30H	U15IR30/45/30S	4.4
400	U15IR40/45/30H	U15IR40/45/30S	4.6
450	U15IR45/45/30H	U15IR45/45/30S	4.8
500	U15IR50/45/30H	U15IR50/45/30S	4.9
600	U15IR60/45/30H	U15IR60/45/30S	5.1
700	U15IR70/45/30H	U15IR70/45/30S	5.7
750	U15IR75/45/30H	U15IR75/45/30S	5.9
800	U15IR80/45/30H	U15IR80/45/30S	6
900	U15IR90/45/30H	U15IR90/45/30S	6.3
1000	U15IR100/45/30H	U15IR100/45/30S	6.6

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut

# 90° Inside Riser

## Cable Ladder Risers



Sold as Individual

### U10 90° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U10IR10/90/30H	U10IR10/90/30S	1.8
150	U10IR15/90/30H	U10IR15/90/30S	2.3
200	U10IR20/90/30H	U10IR20/90/30S	2.5
300	U10IR30/90/30H	U10IR30/90/30S	2.7
400	U10IR40/90/30H	U10IR40/90/30S	2.9
450	U10IR45/90/30H	U10IR45/90/30S	3
500	U10IR50/90/30H	U10IR50/90/30S	3.2
600	U10IR60/90/30H	U10IR60/90/30S	3.4
700	U10IR70/90/30H	U10IR70/90/30S	4
750	U10IR75/90/30H	U10IR75/90/30S	4.1
800	U10IR80/90/30H	U10IR80/90/30S	4.3
900	U10IR90/90/30H	U10IR90/90/30S	4.6
1000	U10IR100/90/30H	U10IR100/90/30S	4.9

### U12 90° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U12IR10/90/30H	U12IR10/90/30S	3.3
150	U12IR15/90/30H	U12IR15/90/30S	3.4
200	U12IR20/90/30H	U12IR20/90/30S	3.5
300	U12IR30/90/30H	U12IR30/90/30S	3.7
400	U12IR40/90/30H	U12IR40/90/30S	3.9
450	U12IR45/90/30H	U12IR45/90/30S	4.1
500	U12IR50/90/30H	U12IR50/90/30S	4.2
600	U12IR60/90/30H	U12IR60/90/30S	4.4
700	U12IR70/90/30H	U12IR70/90/30S	5
750	U12IR75/90/30H	U12IR75/90/30S	5.2
800	U12IR80/90/30H	U12IR80/90/30S	5.3
900	U12IR90/90/30H	U12IR90/90/30S	5.6
1000	U12IR100/90/30H	U12IR100/90/30S	5.9

### U15 90° Inside Riser

Size (W) mm	Part No.		Weight kg
	HG	SS	
100	U15IR10/90/30H	U15IR10/90/30S	4
150	U15IR15/90/30H	U15IR15/90/30S	4.1
200	U15IR20/90/30H	U15IR20/90/30S	4.2
300	U15IR30/90/30H	U15IR30/90/30S	4.4
400	U15IR40/90/30H	U15IR40/90/30S	4.6
450	U15IR45/90/30H	U15IR45/90/30S	4.8
500	U15IR50/90/30H	U15IR50/90/30S	4.9
600	U15IR60/90/30H	U15IR60/90/30S	5.1
700	U15IR70/90/30H	U15IR70/90/30S	5.7
750	U15IR75/90/30H	U15IR75/90/30S	5.9
800	U15IR80/90/30H	U15IR80/90/30S	6
900	U15IR90/90/30H	U15IR90/90/30S	6.3
1000	U15IR100/90/30H	U15IR100/90/30S	6.6

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore™**  
Unistrut

# Reducers

## Cable Ladder Risers

Reducers are available in three variants and can be made to order for any stock width to any other standard width.

**Variants include :**

- Left hand reducers
- Right hand reducers
- Straight reducers

To calculate the correct reducer, please follow the formula below:

**Choose your depth of ladder**

U10 (Medium Duty)	= U10
U12 ( <b>Heavy Duty</b> )	= U12
U15 ( <b>Extra Heavy Duty</b> )	= U15

**Choose the reducer variant**

Left hand	= LR
Right hand	= RR
Straight	= SR

**Choose the starting width**

100mm	= 10
150mm	= 15
200mm	= 20
300mm	= 30
400mm	= 40
450mm	= 45
500mm	= 50
600mm	= 60
700mm	= 70
750mm	= 75
800mm	= 80
900mm	= 90
1000mm	= 100
1200mm	= 120

**and the End (reduced) width**

Example shows a U10 Straight Reducer of 800mm down to 400mm.



U10

U10 SR

U10 SR 80

U10 SR 80 / 40

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore**<sup>™</sup>  
Unistrut



# Branch Tees

## Cable Ladder Branch Tees

Atkore Unistrut's Branch Tee's simplify the method of installation instead of using the traditional tee piece.

This allows full ladder installation runs and tee's to be added at a later date to ensure accuracy and to improve installation times.



### Key Features

- Dictate where tee's positioned
- Reduces ladder cuts
- Improved installation times
- Lower installation cost
- Reduced weight for install



	Width				
Radius (mm)	300	450	600	750	900
300					
450					
600					
750					
900					



### Part Number Guide

Part number = Size\*BT\*Width\*Rad\*Finish

For example: U10BT3030HG = U10 Cable Ladder Branch Tee 300mm x 300mm in Hot-Dipped Galvanised finish.

Atkore Unistrut & Marco have an experienced technical sales team who can assist with all product enquiries.

# Couplers

## Cable Ladder Couplers

### Straight Splice



Sold as  
Pair



Inc Fixings

Size	Part No.		Weight
	HG	SS	
U10	U10/SP/H	U10/SP/S	1.5
U12	U12/SP/H	U12/SP/S	1.7
U15	U15/SP/H	U15/SP/S	1.9

### Verticle Splice



Sold as  
Pair



Inc Fixings

Size	Part No.		Weight
	HG	SS	
U10	U10/VSP/H	U10/VSP/S	1.9
U12	U12/VSP/H	U12/VSP/S	2.3
U15	U15/VSP/H	U15/VSP/S	2.8

### Horizontal Splice




Sold as  
Pair



Inc Fixings

Size	Part No.		Weight
	HG	SS	
U10	U10/HSP/H	U10/HSP/S	1.6
U12	U12/HSP/H	U12/HSP/S	1.8
U15	U15/HSP/H	U15/HSP/S	2.1

### Thermal Expansion Coupler

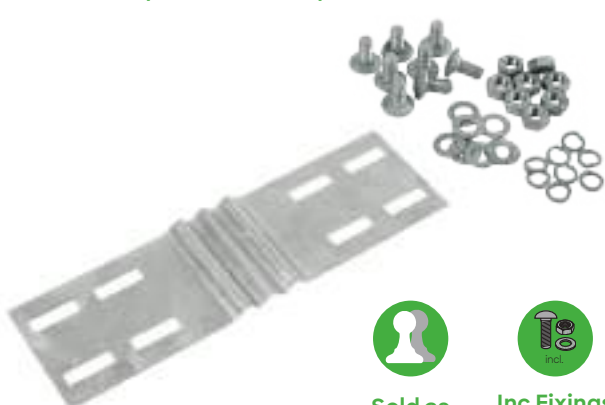

Sold as  
Pair



Inc Fixings

Size	Part No.		Weight
	HG	SS	
U10	U10/TEC/H	U10/TEC/S	1.5
U12	U12/TEC/H	U12/TEC/S	1.8
U15	U15/TEC/H	U15/TEC/S	2.1

Cable Ladder




# Covers - U10, U12 & U15

## Cable Ladder Covers

Type	Part No.		Ladder Width	Std Length
	HG	SS	mm	m
U/COV	U/COV100H	U/COV100S	100	3
U/COV	U/COV150H	U/COV150S	150	3
U/COV	U/COV200H	U/COV200S	200	3
U/COV	U/COV300H	U/COV300S	300	3
U/COV	U/COV400H	U/COV400S	400	1.5
U/COV	U/COV450H	U/COV450S	450	1.5
U/COV	U/COV500H	U/COV500S	500	1.5
U/COV	U/COV600H	U/COV600S	600	1.5
U/COV	U/COV700H	U/COV700S	700	1.5
U/COV	U/COV750H	U/COV750S	750	1.5
U/COV	U/COV800H	U/COV800S	800	1.5
U/COV	U/COV900H	U/COV900S	900	1.5
U/COV	U/COV1000H	U/COV1000S	1000	1.5
U/COV	U/COV1200H	U/COV1200S	1200	1.5

Other lengths available upon request

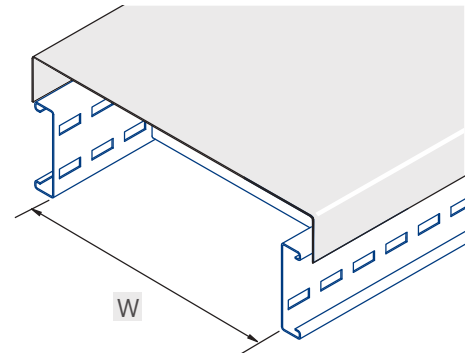

Sold as Individual


Cable Ladder

## A cover for every fitting

Atkore Unistrut have custom fit covers for the entire range of lengths and fittings and can provide custom sizes if required for unique jobs.

These are available upon request - please contact the sales department for further information.

## Cover Clip



Length 1.5m - Use 4 Cover Fixings

Length 3.0m - Use 6 Cover Fixings

Part No.	Finish
	Stainless Steel or Hot Galvanised
U/COVCLIP	S or H

Cover clip can be orientated to achieve closed or ventilated cover


**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore**  
Unistrut

# Accessories


## Cable Ladder Accessories

### H/D Bracket

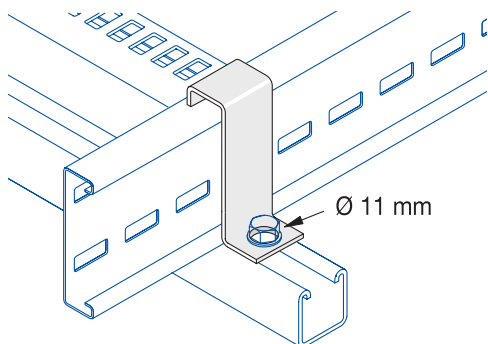


Type	Part No.	
	HG	SS
U10 / HDB	U10/HDB/H	U10/HDB/S
U12 / HDB	U12/HDB/H	U12/HDB/S
U15 / HDB	U15/HDB/H	U15/HDB/S

### Suspension Clip

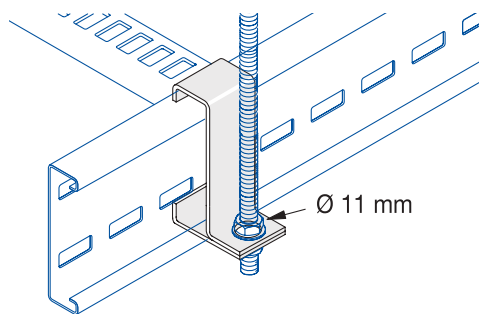


Type	Part No.	
	HG	SS
U10 / SC	U10/SC/H	U10/SC/S
U12 / SC	U12/SC/H	U12/SC/S
U15 / SC	U15/SC/H	U15/SC/S

### Stop End - U10

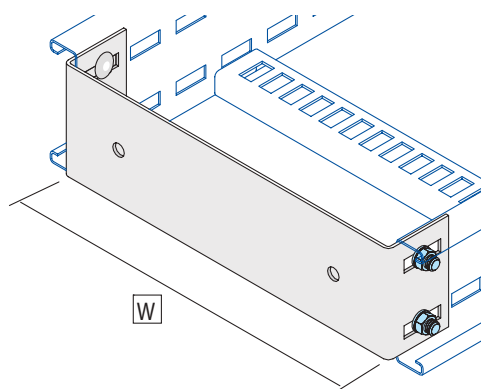

Sold as Individual

### Stop End - U12

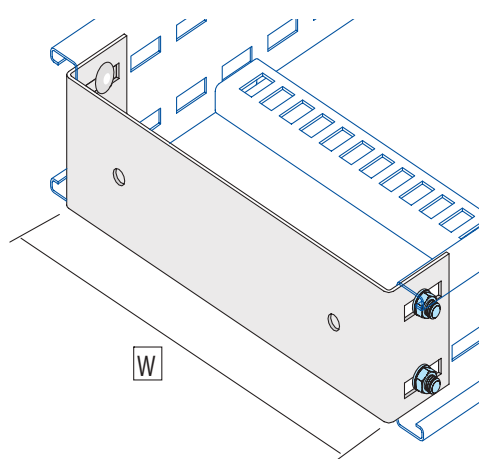

Sold as Individual


Size (W) mm	Part No.	
	HG	SS
150	U10/SE150/H	U10/SE150/S
300	U10/SE300/H	U10/SE300/S
450	U10/SE450/H	U10/SE450/S
600	U10/SE600/H	U10/SE600/S
750	U10/SE750/H	U10/SE750/S
900	U10/SE900/H	U10/SE900/S

Size (W) mm	Part No.	
	HG	SS
150	U12/SE150/H	U12/SE150/S
300	U12/SE300/H	U12/SE300/S
450	U12/SE450/H	U12/SE450/S
600	U12/SE600/H	U12/SE600/S
750	U12/SE750/H	U12/SE750/S
900	U12/SE900/H	U12/SE900/S

# Accessories

## Cable Ladder Accessories


### Stop End - U15



Sold as Individual


Size (W) mm	Part No.	
	HG	SS
150	U15/SE150/H	U15/SE150/S
300	U15/SE300/H	U15/SE300/S
450	U15/SE450/H	U15/SE450/S
600	U15/SE600/H	U15/SE600/S
750	U15/SE750/H	U15/SE750/S
900	U15/SE900/H	U15/SE900/S

### Hold Down Bracket




Type	Part No.	
	HG	SS
U10/HDB	U/CLAMP/H	U/CLAMP/S

### Hold Down Clip



Type	Part No.	
	HG	SS
U/CLIP	U/CLIP/H	U/CLIP/S


### Tee Bracket



Incl Fitments

Type	Part No.		Quantity
	HG	SS	
TEE	U/2TEE/H	U/2TEE/S	2
TEE	U/2TEE/H/UN	U/2TEE/S/UN	1

### Reducing Splice Plate



Incl Fitments

Type	Part No.	
	HG	SS
U/RSP	U/RSP/HG	U/RSP/SS

**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD


**Atkore™**  
Unistrut



# Accessories


## Cable Ladder Accessories

### Wall Bracket

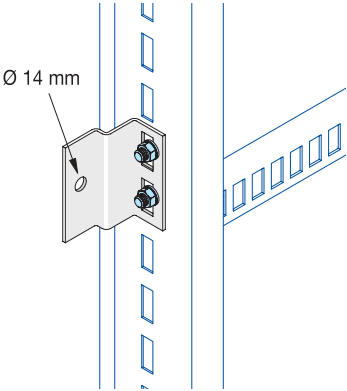

Part No.	Finish
U/WCH	Stainless Steel or Hot Galvanised SS or HG


### Rail to Rail Dropper

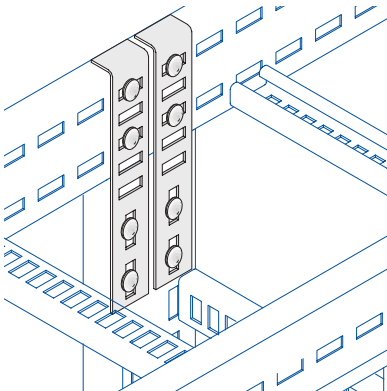

Inc Fitments

Part No.	Finish
U/RRD	Stainless Steel or Hot Galvanised SS or HG

### Mounting Plate

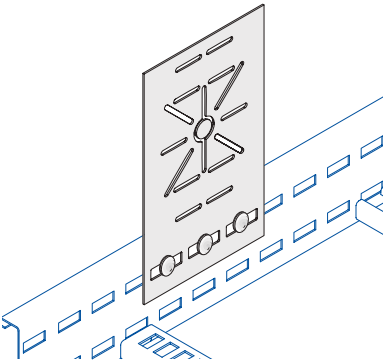


Inc Fitments

Part No.	Finish
U/MP	Stainless Steel or Hot Galvanised SS or HG

### Earth Strap

Tinned Copper Braid  
M10 Hole Size

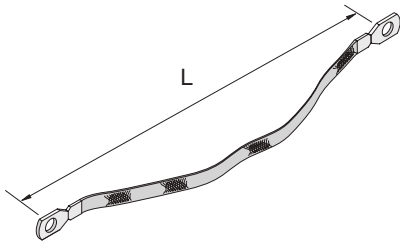


Part No.	Size (L)
UES100	100mm
UES300	300mm

# Accessories

## Cable Ladder Accessories


### Curved Divider



Incl. Fixments

Part No.	Height mm	Finish
U/CUR30	30mm	SS or HG
U/CUR70	70mm	SS or HG


### Straight Divider

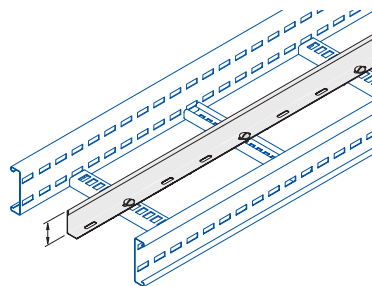

Incl. Fixments

Part No.	Height mm	Finish
U/DIV30	30mm	SS or HG
U/DIV70	70mm	SS or HG


### Ladder Fixing Set



Part No.	Finish Stainless Steel or Hot Galvanised
U/FIX16M10	SS or HG

Pack of 16 (nuts, bolts and washers)

### Cable Drop Out

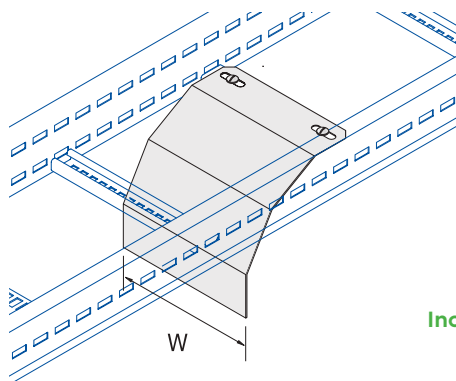


Incl. Fixments

Part No.	Size (W) mm	Finish
U/DO/150	145mm	SS or HG
U/DO/200	195mm	SS or HG
U/DO/300	295mm	SS or HG
U/DO/450	445mm	SS or HG
U/DO/600	595mm	SS or HG
U/DO/750	745mm	SS or HG
U/DO/900	895mm	SS or HG

# Couplers


## Cable Ladder Couplers

### SP Coupler (Straight Splice)




2x Straight Splices with fasteners included.  
For use in joining flat sections (straights and curves)

### VSP Coupler (Verticle Splice)




2x Vertical Splices with fittings included.  
For use in creating an adjustable riser.

### HSP Coupler (Horizontal Splice)



2x Horizontal Splices with fittings included.  
A hinged splice to allow straights to connect at varying angles.

### TEC Coupler (Thermal Expansion Coupler)



2x Thermal Expansion Couplers with fittings included.  
To compensate for thermal expansion.


**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore**<sup>TM</sup>  
Unistrut



# Fittings

## Cable Ladder Fittings



### Rung Distance

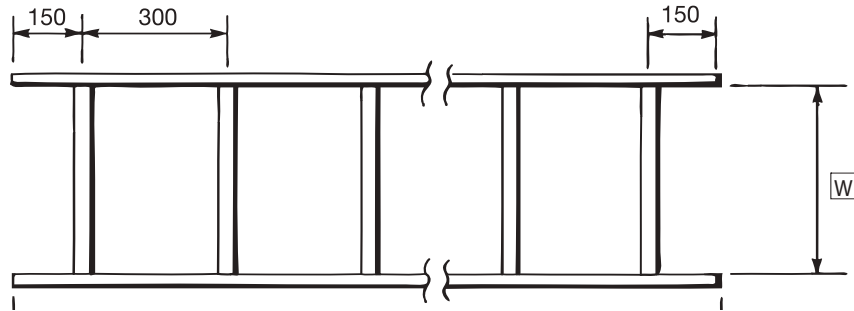

### 90° Flat Bend

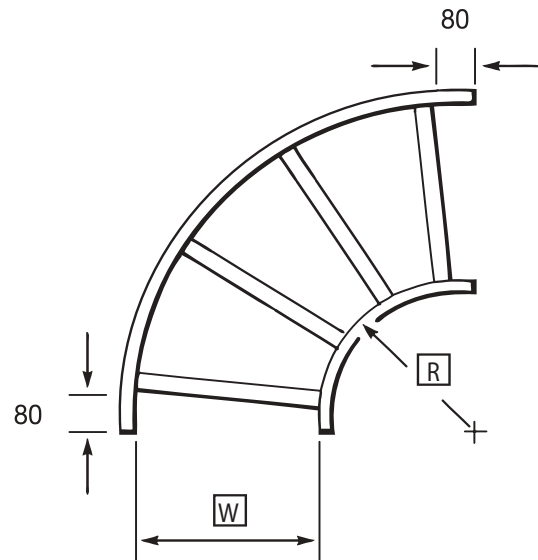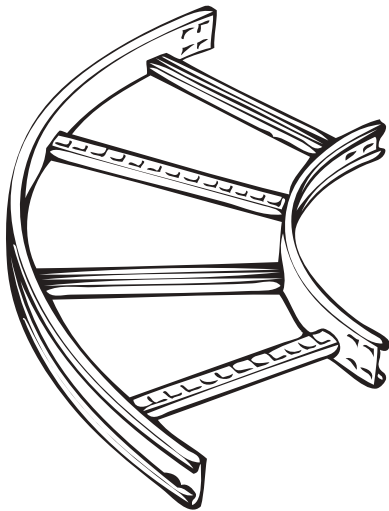

### 45° Flat Bend

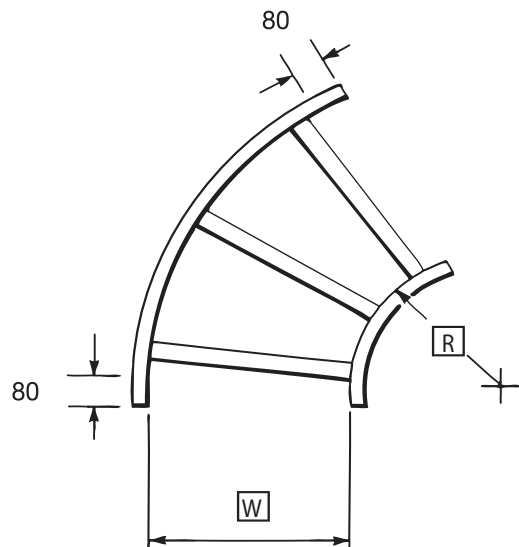
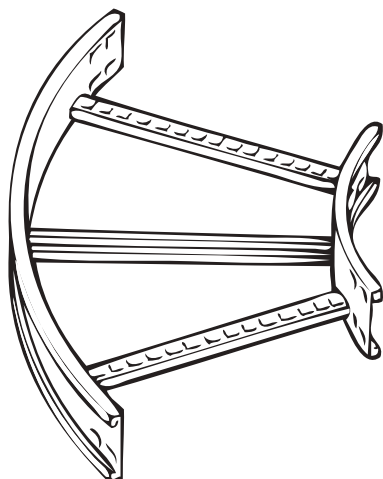


Please use codes on page 77 for [W], [R] and [D]



# Fittings

## Cable Ladder Fittings



### Equal Tee

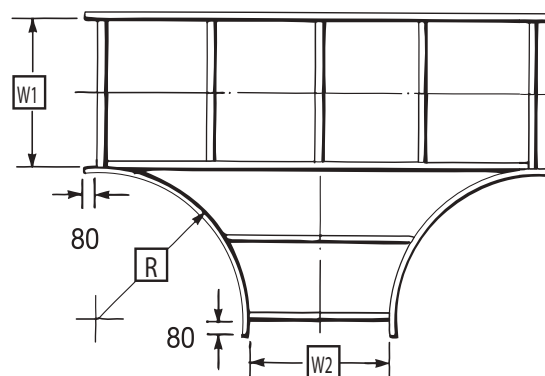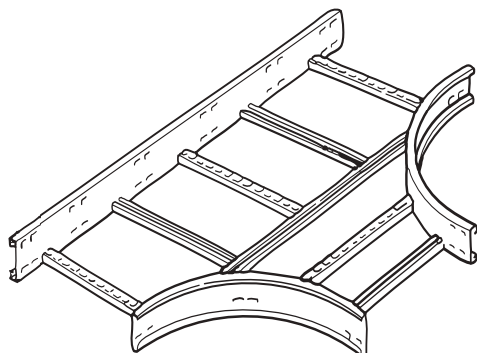

### Equal Cross

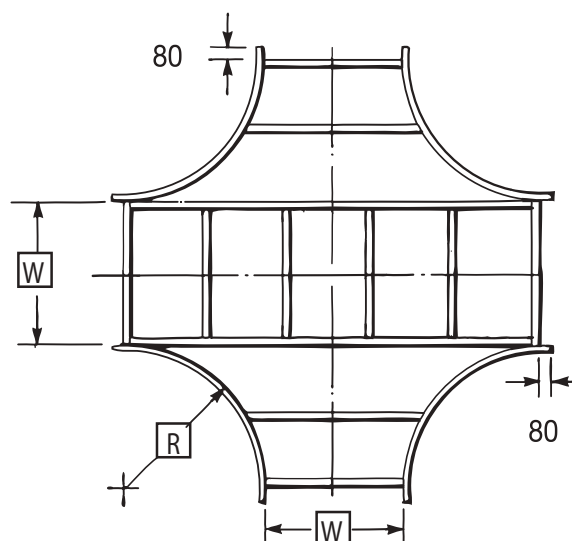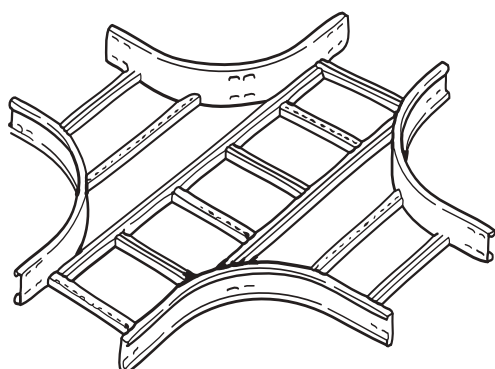

### 90° Outside Riser

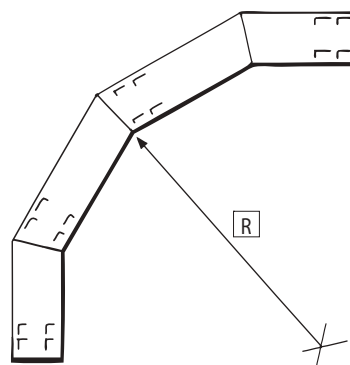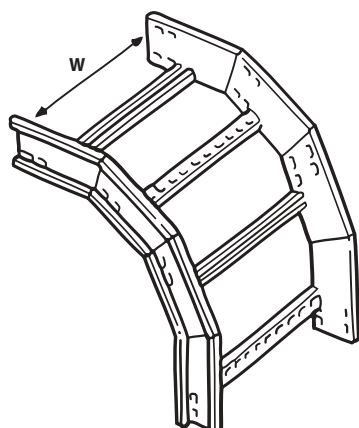

Please use codes on page 77 for [W], [R] and [D]

# Materials & Finishes

## Cable Ladder Materials & Finishes

### Hot-Dip Galvanised [HG]

Cable Trays, brackets, cantilever arms and fittings can be Hot-Dip Galvanised in accordance with BS EN ISO1461:2009 and chromated.

The minimum average Zinc Coating is as follows:

- Cold Rolled From 1.5mm Steel – 55 microns
- 2.5mm Steel – 55 microns
- Fittings spun galvanised – 45 microns
- Mild Steel – BS EN 10149-3 grade S280 – min.yield 280 n/mm<sup>2</sup> – UTS 370 n/mm<sup>2</sup>

### Deep Hot-Dip Galvanised

- BS EN 10025 S275JO+AR+CL1 or equivalent/better. 2mm min. thick material.

### Stainless Steel [SS]

- Stainless Steel 1.4404 (316L)
- Hot Rolled to B.S.EN10088-2-1.4404+1D.
- Cleaned (Pickled & Passivated)

Applying a pickling process to Stainless Steel results in a clean product and it also removes any heat discolouration that has occurred in the welding process.

**SPECIAL COATINGS AND MATERIAL GRADES ARE AVAILABLE ON REQUEST**

Pickle & Passivate is available upon request

### Certification and Quality Standards

BS EN 61537:2007

ISO 9001 – Quality system certification

ISO 14001 – Environment certification

ISO 45001 – Health and safety certification

### Useful Cross Section

#### Type U10

Width mm	Useful cross section (cm <sup>2</sup> )
100	75
150	113
200	150
300	225
400	300
450	338
500	375
600	450
750	563
800	600
900	650
1000	750

#### Type U12

Width mm	Useful cross section (cm <sup>2</sup> )
100	100
150	150
200	200
300	300
400	400
450	450
500	500
600	600
750	750
800	800
900	900
1000	1000


#### Type U15

Width mm	Useful cross section (cm <sup>2</sup> )
100	125
150	188
200	250
300	375
400	500
450	563
500	625
600	750
750	938
800	1000
900	1125
1000	1250

# Loading Data

## Cable Ladder Loading Data

Stated loadings apply to mild steel products only.

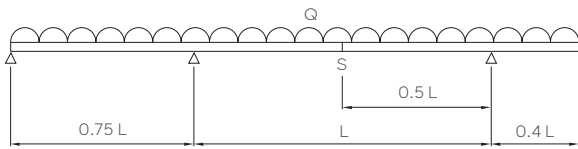

Load test according to CEI/IEC 61537:2001

Q = UDL (uniformly distributed load)

Safety Factor = 1.7

L = intermediate span

F = deflection = 1/100 of the intermediate span (max.)

S = splice location

Atkore Unistrut's load testing is in accordance with CEI/IEC 61537:2001. In practical terms this covers continuous/multi span installations, evenly loaded along the length of, and across the full width of the ladder. The end spans in these installations should be reduced to 0.75 of the intermediate spans.

Deflection: Atkore Unistrut's load and deflection figures are in accordance with CEI/IEC 61537:2001, with the characteristic deflection of Unistrut Cable Ladder limited to span/100, and load figures inclusive of a safety factor of 1.7.


Accessories: To ensure adequate support, accessories should be supported locally.

Couplers: The loading and deflection tables for Atkore Unistrut Cable Ladder assume that the couplers are located at the most onerous position within the span (i.e. mid span). To maintain the load/deflection figures stated in the tables, the couplers should not be located in end spans or over support locations. Only one pair of couplers should be installed per span.


**ncm**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

**Atkore**  
Unistrut

### Atkore Unistrut Ladder - Type U10

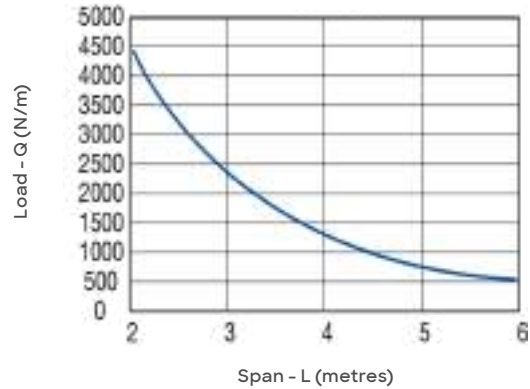

### Atkore Unistrut Ladder - Type U12

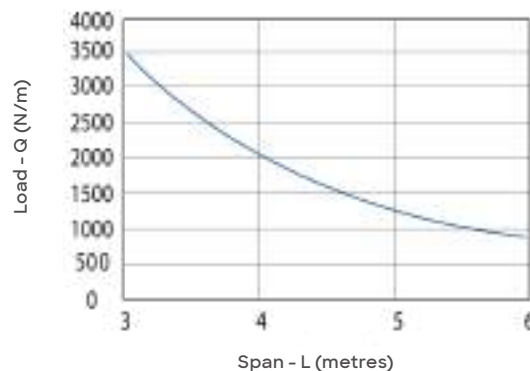

### Atkore Unistrut Ladder - Type U15




## Pipe Clips

### Atkore Unistrut Pipe Clips


#### Base Plates with Thread Connector

Part No.	Finish ZP	G	H mm		
146 00 81	.	M8	11	0.06	100
146 01 01	.	M10	11	0.06	100
146 01 21	.	M12	13	0.06	100
146 01 08	.	M8/M10	17	0.06	100
146 02 21	.	1/2"	18	0.07	50
146 02 81	.	3/4"	20	0.09	50

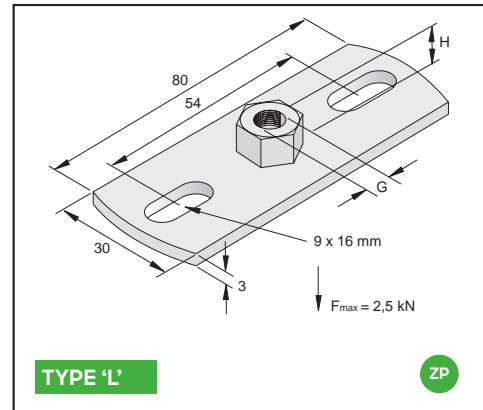

#### Industrial Pipe Clamps

HG Part No.	SS Part No.	"	D NB/DN	W x T mm	S mm	L mm	L1 mm
PS0153	PS0154	1/2"	15	40x3	11	108	68
PS0203	PS0204	3/4"	20	40x3	11	113	73
PS0253	PS0254	1"	25	40x3	11	120	80
PS0323	PS0324	1 1/4"	32	40x3	11	128	88
PS0403	PS0404	1 1/2"	40	40x3	11	134	94
PS0503	PS0504	2"	50	40x4	11	148	108
PS0653	PS0654	2 1/2"	65	40x4	11	164	124
PS0803	PS0804	3"	80	40x4	11	177	137
PS1003	PS1004	4"	100	40x4	14	202	162
PS1253	PS1254	5"	125	40x6	14	231	191
PS1503	PS1504	6"	150	40x6	14	260	220
PS2003	PS2004	8"	200	40x6	14	301	261
PS2503	PS2504	10"	250	50x6	18	385	335
PS3003	PS3004	12"	300	50x6	18	435	385

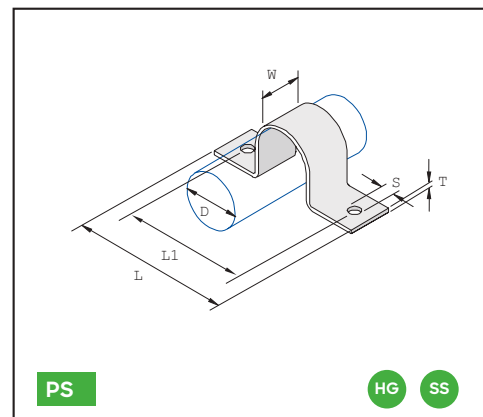




# Pipe Clips


## Atkore Unistrut Pipe Clips

### U-Bolts

Part No.	Finish ZP	G	DN	"	D mm	H3 mm	H mm	L mm	
170002102	-	M6	15	1/2"	21.3	20	37	29	100
170002112	-	M8	15	1/2"	21.3	20	37	31	100
170002702	-	M6	20	3/4"	26.9	25	48	34	100
170002712	-	M8	20	3/4"	26.9	36	64	36	100
170003402	-	M6	25	1"	33.7	32	60	41	100
170003412	-	M8	25	1"	33.7	30	44	41	100
170003422	-	M10	25	1"	33.7	30	52	46	100
170004212	-	M8	32	1 1/4"	42.4	35	67	52	100
170004222	-	M10	32	1 1/4"	42.4	35	67	54	100
170004812	-	M8	40	1 1/2"	48.3	40	78	57	100
170004822	-	M10	40	1 1/2"	48.3	40	78	59	100
170006012	-	M8	50	2"	60.3	35	90	71	100
170006022	-	M10	50	2"	60.3	40	90	73	100
170006032	-	M12	50	2"	60.3	35	90	75	100
170007622	-	M10	65	2 1/2"	76.1	40	103	89	100
170007632	-	M12	65	2 1/2"	76.1	35	105	91	100
170008922	-	M10	80	3"	88.9	50	115	100	50
170008932	-	M12	80	3"	88.9	38	115	102	50
170011422	-	M10	100	4"	114.3	50	146	124	50
170011432	-	M12	100	4"	114.3	50	144	126	50
170011442	-	M16	100	4"	114.3	38	140	130	50
170013932	-	M12	125	5"	139.7	60	173	156	25
170013942	-	M16	125	5"	139.7	38	170	160	25
170016832	-	M12	150	6"	168.3	60	198	182	25
170016842	-	M16	150	6"	168.3	38	191	186	25
170021932	-	M12	200	8"	219.1	60	255	236	25
170021942	-	M16	200	8"	219.1	38	255	240	25
170027332	-	M12	250	10"	273.0	38	313	290	1
170027342	-	M16	250	10"	273.0	38	313	294	1
170027352	-	M20	250	10"	273.0	38	313	298	1
170032432	-	M12	300	12"	323.9	38	364	341	1
170032442	-	M16	300	12"	323.9	38	364	345	1
170032452	-	M20	300	12"	323.9	38	364	349	1

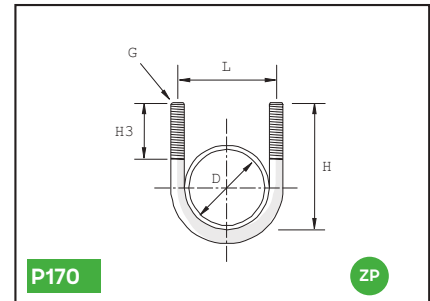

Part No.	Finish ZP	G	DN	"	D mm	H3 mm	H mm	L mm	
171002102	-	M6	15	1/2"	21.3	70	97	29	100
171002112	-	M8	15	1/2"	21.3	70	97	31	100
171002702	-	M6	20	3/4"	26.9	70	109	34	100
171002712	-	M8	20	3/4"	26.9	70	109	36	100
171003402	-	M6	25	1"	33.7	70	111	41	100
171003412	-	M8	25	1"	33.7	70	111	44	100
171003422	-	M10	25	1"	33.7	70	111	46	100
171004212	-	M8	32	1 1/4"	42.4	90	122	52	100
171004222	-	M10	32	1 1/4"	42.4	90	122	54	100
171004812	-	M8	40	1 1/2"	48.3	90	127	57	100
171004822	-	M10	40	1 1/2"	48.3	90	127	59	100
171006012	-	M8	50	2"	60.3	90	140	71	100
171006022	-	M10	50	2"	60.3	90	140	73	100
171007622	-	M10	65	2 1/2"	76.1	90	152	89	100
171008922	-	M10	80	3"	88.9	90	168	100	50
171008932	-	M12	80	3"	88.9	90	168	102	50
171011422	-	M10	100	4"	114.3	90	193	124	50
171011432	-	M12	100	4"	114.3	90	193	126	50
171013932	-	M12	125	5"	139.7	90	213	156	25
171016832	-	M12	150	6"	168.3	90	240	182	25
171016842	-	M16	150	6"	168.3	90	240	186	25
171021932	-	M12	200	8"	219.1	90	313	236	25
171021942	-	M16	200	8"	219.1	90	313	240	25
171027332	-	M12	250	10"	273.0	100	363	290	1
171027342	-	M16	250	10"	273.0	100	363	294	1
171032432	-	M12	300	12"	323.9	100	413	341	1
171032442	-	M16	300	12"	323.9	100	413	345	1
171032452	-	M20	300	12"	323.9	100	413	349	1

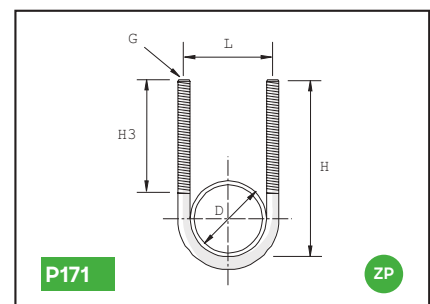

## Surface Trunking Part Code Guide

### Flytec Trunking Part Code Guide

TR Trunking sizes are available from 2x2 to 12x12.

Cable Trunking - TR			Cable Trunking - TX			Cable Trunking - IP54		
Part Code	2 Comp	3 Comp	Part Code	2 Comp	3 Comp	Part Code	2 Comp	3 Comp
TR22	TR222C	-	TR22TX	TR22TX2C	-	TR22-IP54	TR222C-IP54	-
TR32	TR322C	-	TR32TX	TR32TX2C	-	TR32-IP54	TR322C-IP54	-
TR33	TR332C	-	TR33TX	TR33TX2C	-	TR33-IP54	TR332C-IP54	-
TR42	TR422C	-	TR42TX	TR42TX2C	-	TR42-IP54	TR422C-IP54	-
TR43	TR432C	-	TR43TX	TR43TX2C	-	TR43-IP54	TR432C-IP54	-
TR44	TR442C	-	TR44TX	TR44TX2C	-	TR44-IP54	TR442C-IP54	-
TR62	TR622C	TR623C	TR62TX	TR62TX2C	TR62TX3C	TR62-IP54	TR622C-IP54	TR623C-IP54
TR63	TR632C	TR633C	TR63TX	TR63TX2C	TR63TX3C	TR63-IP54	TR632C-IP54	TR633C-IP54
TR64	TR642C	TR643C	TR64TX	TR64TX2C	TR64TX3C	TR64-IP54	TR642C-IP54	TR643C-IP54
TR66	TR662C	TR663C	TR66TX	TR66TX2C	TR66TX3C	TR66-IP54	TR662C-IP54	TR663C-IP54
TR82	TR822C	TR823C	TR82TX	TR82TX2C	TR82TX3C	TR82-IP54	TR822C-IP54	TR823C-IP54
TR83	TR832C	TR833C	TR83TX	TR83TX2C	TR83TX3C	TR83-IP54	TR832C-IP54	TR833C-IP54
TR84	TR842C	TR843C	TR84TX	TR84TX2C	TR84TX3C	TR84-IP54	TR842C-IP54	TR843C-IP54
TR86	TR862C	TR863C	TR86TX	TR86TX2C	TR86TX3C	TR86-IP54	TR862C-IP54	TR863C-IP54
TR88	TR882C	TR883C	TR88TX	TR88TX2C	TR88TX3C	TR88-IP54	TR882C-IP54	TR883C-IP54
TR92	TR922C	TR923C	TR92TX	TR92TX2C	TR92TX3C	TR92-IP54	TR922C-IP54	TR923C-IP54
TR93	TR932C	TR933C	TR93TX	TR93TX2C	TR93TX3C	TR93-IP54	TR932C-IP54	TR933C-IP54
TR94	TR942C	TR943C	TR94TX	TR94TX2C	TR94TX3C	TR94-IP54	TR942C-IP54	TR943C-IP54
TR96	TR962C	TR963C	TR96TX	TR96TX2C	TR96TX3C	TR96-IP54	TR962C-IP54	TR963C-IP54
TR98	TR982C	TR983C	TR98TX	TR98TX2C	TR98TX3C	TR98-IP54	TR982C-IP54	TR983C-IP54
TR99	TR992C	TR993C	TR99TX	TR99TX2C	TR99TX3C	TR99-IP54	TR992C-IP54	TR993C-IP54
TR122	TR1222C	TR1223C	TR122TX	TR122TX2C	TR122TX3C	TR122-IP54	TR1222C-IP54	TR1223C-IP54
TR123	TR1232C	TR1233C	TR123TX	TR123TX2C	TR123TX3C	TR123-IP54	TR1232C-IP54	TR1233C-IP54
TR124	TR1242C	TR1243C	TR124TX	TR124TX2C	TR124TX3C	TR124-IP54	TR1242C-IP54	TR1243C-IP54
TR126	TR1262C	TR1263C	TR126TX	TR126TX2C	TR126TX3C	TR126-IP54	TR1262C-IP54	TR1263C-IP54
TR128	TR1282C	TR1283C	TR128TX	TR128TX2C	TR128TX3C	TR128-IP54	TR1282C-IP54	TR1283C-IP54
TR129	TR1292C	TR1293C	TR129TX	TR129TX2C	TR129TX3C	TR129-IP54	TR1292C-IP54	TR1293C-IP54
TR1212	TR12122C	TR12123C	TR1212TX	TR1212TX2C	TR1212TX3C	TR1212-IP54	TR12122C-IP54	TR12123C-IP54

# Surface Trunking Systems

## Part Code Guides

The tables below show limited part codes as examples only.  
Please refer to the Trunking part code guide on page 128 for the full list of sizes.

Powder Coated					
2 Compartment			3 Compartment		
TR22/W	TR222C/W	TR623C/W	TR22TX/W	TR22TX2C/W	TR62TX3C/W
or	or	or	or	or	or
TR22/B	TR222C/B	TR623C/B	TR22TX/B	TR22TX2C/B	TR62TX3C/B

Power Coating Spec: As Standard  
W = White RAL9010 Semi-Gloss  
B = Black RAL9005 Semi-Gloss

## Flytec Trunking Accessory Part Code Guide

Fast Fix IP4X (Sizes 2x2-6x6)		
	2 Comp	3 Comp
FGB22FF	FGB22FF2C	FGB62FF3C
FGB32FF	FGB32FF2C	FGB63FF3C
FGB33FF	FGB33FF2C	FGB64FF3C
↓	↓	↓
FGB66FF	FGB66FF2C	FGB66FF3C

Please note: Fast Fix IP4X Trunking is available from sizes 50x50 to 150x150 only. For larger sizes, refer to our Standard Trunking range.

See page 131 for Fast Fix Accessories.

Standard Trunking		
	2 Comp	3 Comp
FGB22	FGB222C	FGB623C
FGB32	FGB322C	FGB633C
FGB33	FGB332C	FGB643C
↓	↓	↓
FGB1212	FGB12122C	FGB12123C

Please note: IP4X straps are sold separately for Standard Trunking.

See page 137 for Standard Accessories.

IP54		
	2 Comp	3 Comp
FGB22-IP54	FGB222C-IP54	FGB623C-IP54
FGB32-IP54	FGB322C-IP54	FGB633C-IP54
FGB33-IP54	FGB332C-IP54	FGB643C-IP54
↓	↓	↓
FGB1212-IP54	FGB12122C-IP54	FGB12123C-IP54

See page 128 for full list of sizes.

## Surface Trunking Ranges

Steel Surface Trunking is available in the following variants:

### Fast Fix IP4X (FF)

Fast Fix IP4X range is available from 2x2 to 6x6, including rectangular sizes, in various bends such as 45°, 90°, flat and tees. For larger sizes refer to the standard range.

### Security Fixing (TX)

A pan head screw with TORX® Tamperproof screw fix lids.

### Multi-Compartment (C)

Constructed to the same high quality as the single compartment range, the multi-compartment trunking partitions are manufactured from Galvanised steel spot welded into position.

### IP54 (-IP54)

Gasketed trunking to prevent ingress of dust and liquids, available in single or multi compartment.

### Stainless Steel (SS)

Stainless Steel trunking 316L & 304 grade is available in single or multi compartment. The Stainless Steel trunking systems are made to order.

# Steel Cable Trunking

## Steel Cable Trunking Systems

Flytec's innovative product range has been a great addition to the portfolio, allowing the business to expand the overall offering. The Steel Surface Trunking range includes, Fast Fix IP4X, Security Fixing, IP54 and Stainless Steel Trunking, available in single and multi-compartment.

### Surface Trunking


All lengths are supplied with internal connectors secured by M5 bright zinc-plated screws fixed into Captive Nut inserts.

All Surface Trunking is made from Pre-Galvanised Steel to BS EN 10142 & 3 and is manufactured to BS EN 50085-1 and BS EN 50085-2-1.

Straight lids are secured by a two part all steel turnbuckle as standard. Slotted or tamperproof screw lids are also available on request.

Accessories are generally a one piece construction complete with internal fitting connector.


The entire range is also available in a powder coated finish on request.

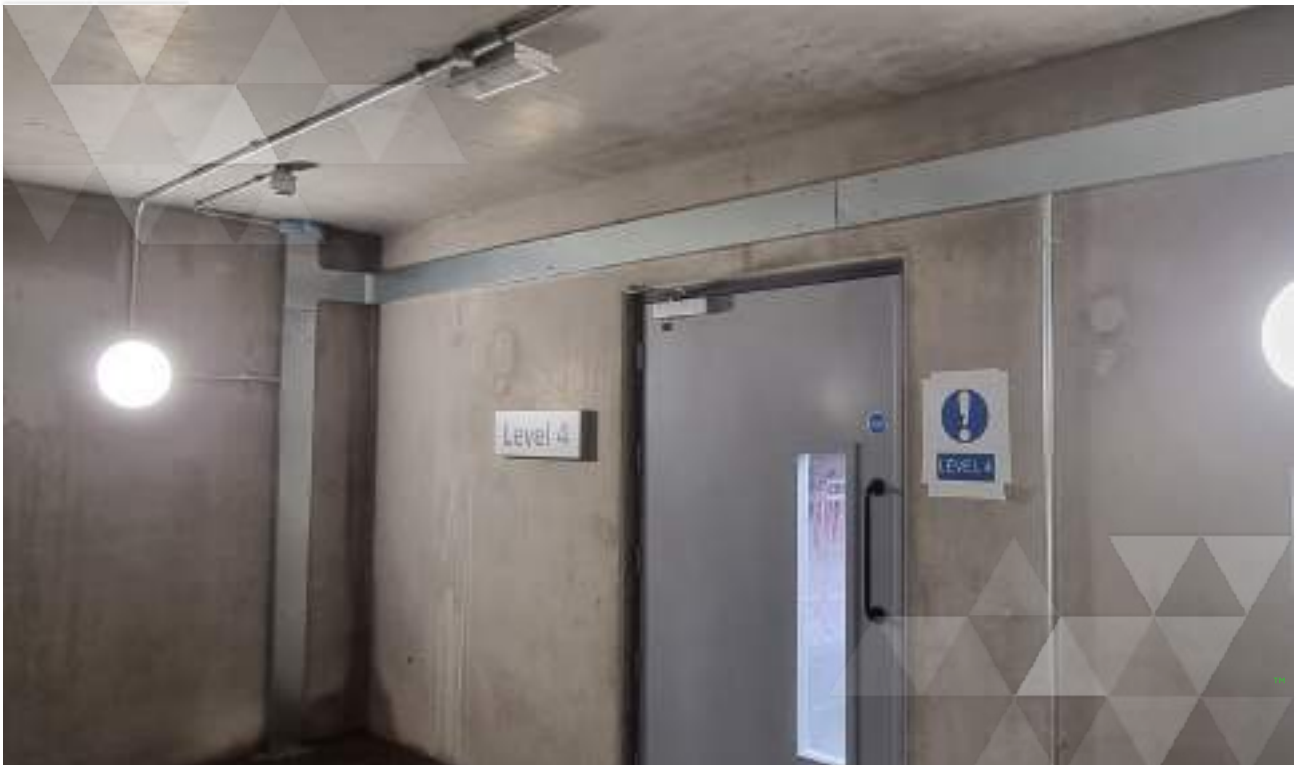

# Fast Fix Cable Trunking Accessories

## 45° Bends


### Flat Lid 45° Bend - **FB**



For larger sizes,  
check out our  
Standard range on  
page 137


Size	Product Code*
mm	Single
50 x 50	FB22FF
75 x 50	FB32FF
75 x 75	FB33FF
100 x 50	FB42FF
100 x 75	FB43FF
100 x 100	FB44FF
150 x 50	FB62FF
150 x 75	FB63FF
150 x 100	FB64FF
150 x 150	FB66FF

### Internal Lid 45° Bend - **IB**



Size	Product Code*
mm	Single
50 x 50	IB22FF
75 x 50	IB32FF
75 x 75	IB33FF
100 x 50	IB42FF
100 x 75	IB43FF
100 x 100	IB44FF
150 x 50	IB62FF
150 x 75	IB63FF
150 x 100	IB64FF
150 x 150	IB66FF

### External Lid 45° Bend - **EB**



Size	Product Code*
mm	Single
50 x 50	EB22FF
75 x 50	EB32FF
75 x 75	EB33FF
100 x 50	EB42FF
100 x 75	EB43FF
100 x 100	EB44FF
150 x 50	EB62FF
150 x 75	EB63FF
150 x 100	EB64FF
150 x 150	EB66FF

**Notes:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.

Example: A 2 Compartment Fast Fix FB in size 75 x 75 would be **FB33FF2C**

3 Compartment is available starting from 150x50.

See part code guide on page 129 for more details.


Refer to part code guides on pages 128 - 129.

TM

# Fast Fix Cable Trunking Accessories


## 90° Bends

### Flat Lid 90° Bend - **FSB**



Size mm	Product Code*
50 x 50	FSB22FF
75 x 50	FSB32FF
75 x 75	FSB33FF
100 x 50	FSB42FF
100 x 75	FSB43FF
100 x 100	FSB44FF
150 x 50	FSB62FF
150 x 75	FSB63FF
150 x 100	FSB64FF
150 x 150	FSB66FF

### Internal Lid 90° Bend - **ISB**



Size mm	Product Code*
50 x 50	ISB22FF
75 x 50	ISB32FF
75 x 75	ISB33FF
100 x 50	ISB42FF
100 x 75	ISB43FF
100 x 100	ISB44FF
150 x 50	ISB63FF
150 x 75	ISB62FF
150 x 100	ISB64FF
150 x 150	ISB66FF

### External Lid 90° Bend - **ESB**



Size mm	Product Code*
50 x 50	ESB22FF
75 x 50	ESB32FF
75 x 75	ESB33FF
100 x 50	ESB42FF
100 x 75	ESB43FF
100 x 100	ESB44FF
150 x 50	ESB62FF
150 x 75	ESB63FF
150 x 100	ESB64FF
150 x 150	ESB66FF

**Notes:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.

3 Compartment is available starting from 150x50.

See part code guide on page 129 for more details.

Refer to accessory part code guide on page 129

TM

# Fast Fix Cable Trunking Accessories

## Tees - Gusset

### Flat Lid Tee Gusset - **FGT**



Size	Product Code*
mm	Single
50 x 50	FGT22FF
75 x 50	FGT32FF
75 x 75	FGT33FF
100 x 50	FGT42FF
100 x 75	FGT43FF
100 x 100	FGT44FF
150 x 50	FGT62FF
150 x 75	FGT63FF
150 x 100	FGT64FF
150 x 150	FGT66FF

### Internal Lid Tee Gusset - **IGT**



Size	Product Code*
mm	
50 x 50	IGT22FF
75 x 50	IGT32FF
75 x 75	IGT33FF
100 x 50	IGT42FF
100 x 75	IGT43FF
100 x 100	IGT44FF
150 x 50	IGT62FF
150 x 75	IGT63FF
150 x 100	IGT64FF
150 x 150	IGT66FF

### External Lid Tee Gusset - **EGT**



Size	Product Code*
mm	
50 x 50	EGT22FF
75 x 50	EGT32FF
75 x 75	EGT33FF
100 x 50	EGT42FF
100 x 75	EGT43FF
100 x 100	EGT44FF
150 x 50	EGT62FF
150 x 75	EGT63FF
150 x 100	EGT64FF
150 x 150	EGT66FF

**Notes:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.

3 Compartment is available starting from 150x50.

See part code guide on page 129 for more details.

Refer to accessory part code guide on page 129

TM

# Fast Fix Cable Trunking Accessories


## Tees - Square

### Flat Lid Tee Square - **FST**




Size mm	Product Code*
50 x 50	FST22FF
75 x 50	FST32FF
75 x 75	FST33FF
100 x 50	FST42FF
100 x 75	FST43FF
100 x 100	FST44FF
150 x 50	FST62FF
150 x 75	FST63FF
150 x 100	FST64FF
150 x 150	FST66FF

### Internal Lid Tee Square - **IST**



Size mm	Product Code*
50 x 50	IST22FF
75 x 50	IST32FF
75 x 75	IST33FF
100 x 50	IST42FF
100 x 75	IST43FF
100 x 100	IST44FF
150 x 50	IST62FF
150 x 75	IST63FF
150 x 100	IST64FF
150 x 150	IST66FF

### External Lid Tee Square - **EST**



Size mm	Product Code*
50 x 50	EST22FF
75 x 50	EST32FF
75 x 75	EST33FF
100 x 50	EST42FF
100 x 75	EST43FF
100 x 100	EST44FF
150 x 50	EST62FF
150 x 75	EST63FF
150 x 100	EST64FF
150 x 150	EST66FF

**Notes:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.

3 Compartment is available starting from 150x50.

See part code guide on page 129 for more details.

Refer to accessory part code guide on page 129



# Fast Fix Cable Trunking Accessories


## Gusset Bends

### Flat Lid Gusset Bend - **FGB**



Size mm	Product Code*
50 x 50	FGB22FF
75 x 50	FGB32FF
75 x 75	FGB33FF
100 x 50	FGB42FF
100 x 75	FGB43FF
100 x 100	FGB44FF
150 x 50	FGB62FF
150 x 75	FGB63FF
150 x 100	FGB64FF
150 x 150	FGB66FF

### Internal Lid Gusset Bend - **IGB**



Size mm	Product Code*
50 x 50	IGB22FF
75 x 50	IGB32FF
75 x 75	IGB33FF
100 x 50	IGB42FF
100 x 75	IGB43FF
100 x 100	IGB44FF
150 x 50	IGB62FF
150 x 75	IGB63FF
150 x 100	IGB64FF
150 x 150	IGB66FF

### External Lid Gusset Bend - **EGB**



Size mm	Product Code*
50 x 50	EGB22FF
75 x 50	EGB32FF
75 x 75	EGB33FF
100 x 50	EGB42FF
100 x 75	EGB43FF
100 x 100	EGB44FF
150 x 50	EGB62FF
150 x 75	EGB63FF
150 x 100	EGB64FF
150 x 150	EGB66FF

**Notes:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.


3 Compartment is available starting from 150x50.

See part code guide on page 129 for more details.

# Fast Fix Cable Trunking Accessories


## Crossovers

### Crossover - **CO**




Size mm	Product Code*
50 x 50	CO22FF
75 x 50	CO32FF
75 x 75	CO33FF
100 x 50	CO42FF
100 x 75	CO43FF
100 x 100	CO44FF
150 x 50	CO62FF
150 x 75	CO63FF
150 x 100	CO64FF
150 x 150	CO66FF

### Crossover Square - **COSQ**



Size mm	Product Code*
50 x 50	COSQ22FF
75 x 50	COSQ32FF
75 x 75	COSQ33FF
100 x 50	COSQ42FF
100 x 75	COSQ43FF
100 x 100	COSQ44FF
150 x 50	COSQ62FF
150 x 75	COSQ63FF
150 x 100	COSQ64FF
150 x 150	COSQ66FF

## Fast Fix - Typical Assembly

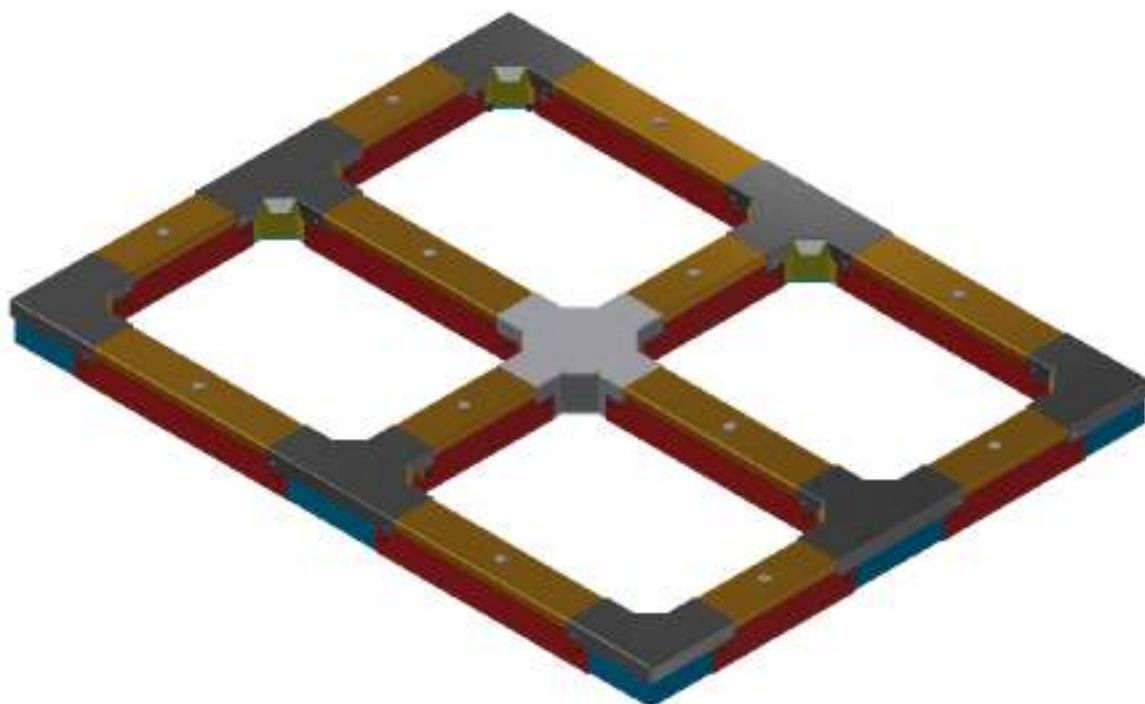


TM

# Standard Cable Trunking Accessories

## Bends

Flat Lid 90° Bend - **FSB**



Size mm	Code	Size mm	Code
50 x 50	FSB22	200 x 150	FSB86
75 x 50	FSB32	200 x 200	FSB88
75 x 75	FSB33	225 x 50	FSB92
100 x 50	FSB42	225 x 75	FSB93
100 x 75	FSB43	225 x 100	FSB94
100 x 100	FSB44	225 x 150	FSB96
150 x 50	FSB62	225 x 225	FSB99
150 x 75	FSB63	300 x 50	FSB122
150 x 100	FSB64	300 x 75	FSB123
150 x 150	FSB66	300 x 100	FSB124
200 x 50	FSB82	300 x 150	FSB126
200 x 75	FSB83	300 x 225	FSB129
200 x 100	FSB84	300 x 300	FSB1212

External Lid 90° Bend - **ISB**



Size mm	Code	Size mm	Code
50 x 50	ISB22	200 x 150	ISB86
75 x 50	ISB32	200 x 200	ISB88
75 x 75	ISB33	225 x 50	ISB92
100 x 50	ISB42	225 x 75	ISB93
100 x 75	ISB43	225 x 100	ISB94
100 x 100	ISB44	225 x 150	ISB96
150 x 50	ISB62	225 x 225	ISB99
150 x 75	ISB63	300 x 50	ISB122
150 x 100	ISB64	300 x 75	ISB123
150 x 150	ISB66	300 x 100	ISB124
200 x 50	ISB82	300 x 150	ISB126
200 x 75	ISB83	300 x 225	ISB129
200 x 100	ISB84	300 x 300	ISB1212

Internal Lid 90° Bend - **ESB**



Size mm	Code	Size mm	Code
50 x 50	ESB22	200 x 150	ESB86
75 x 50	ESB32	200 x 200	ESB88
75 x 75	ESB33	225 x 50	ESB92
100 x 50	ESB42	225 x 75	ESB93
100 x 75	ESB43	225 x 100	ESB94
100 x 100	ESB44	225 x 150	ESB96
150 x 50	ESB62	225 x 225	ESB99
150 x 75	ESB63	300 x 50	ESB122
150 x 100	ESB64	300 x 75	ESB123
150 x 150	ESB66	300 x 100	ESB124
200 x 50	ESB82	300 x 150	ESB126
200 x 75	ESB83	300 x 225	ESB129
200 x 100	ESB84	300 x 300	ESB1212

Flat Lid 45° Bend - **FB**



Size mm	Code	Size mm	Code
50 x 50	FB22	200 x 150	FB86
75 x 50	FB32	200 x 200	FB88
75 x 75	FB33	225 x 50	FB92
100 x 50	FB42	225 x 75	FB93
100 x 75	FB43	225 x 100	FB94
100 x 100	FB44	225 x 150	FB96
150 x 50	FB62	225 x 225	FB99
150 x 75	FB63	300 x 50	FB122
150 x 100	FB64	300 x 75	FB123
150 x 150	FB66	300 x 100	FB124
200 x 50	FB82	300 x 150	FB126
200 x 75	FB83	300 x 225	FB129
200 x 100	FB84	300 x 300	FB1212

Internal Lid 45° Bend - **IB**



Size mm	Code	Size mm	Code
50 x 50	IB22	200 x 150	IB86
75 x 50	IB32	200 x 200	IB88
75 x 75	IB33	225 x 50	IB92
100 x 50	IB42	225 x 75	IB93
100 x 75	IB43	225 x 100	IB94
100 x 100	IB44	225 x 150	IB96
150 x 50	IB62	225 x 225	IB99
150 x 75	IB63	300 x 50	IB122
150 x 100	IB64	300 x 75	IB123
150 x 150	IB66	300 x 100	IB124
200 x 50	IB82	300 x 150	IB126
200 x 75	IB83	300 x 225	IB129
200 x 100	IB84	300 x 300	IB1212

External 45° Bend - **EB**



Size mm	Code	Size mm	Code
50 x 50	EB22	200 x 150	EB86
75 x 50	EB32	200 x 200	EB88
75 x 75	EB33	225 x 50	EB92
100 x 50	EB42	225 x 75	EB93
100 x 75	EB43	225 x 100	EB94
100 x 100	EB44	225 x 150	EB96
150 x 50	EB62	225 x 225	EB99
150 x 75	EB63	300 x 50	EB122
150 x 100	EB64	300 x 75	EB123
150 x 150	EB66	300 x 100	EB124
200 x 50	EB82	300 x 150	EB126
200 x 75	EB83	300 x 225	EB129
200 x 100	EB84	300 x 300	EB1212

All trunking accessories are available as TX Security Fixing Trunking. See part code guide on page 128.

# Standard Cable Trunking Accessories

## Bends

Flat Lid Gusset Bend - **FGB**



Size mm	Code	Size mm	Code
50 x 50	FGB22	200 x 150	FGB86
75 x 50	FGB32	200 x 200	FGB88
75 x 75	FGB33	225 x 50	FGB92
100 x 50	FGB42	225 x 75	FGB93
100 x 75	FGB43	225 x 100	FGB94
100 x 100	FGB44	225 x 150	FGB96
150 x 50	FGB62	225 x 225	FGB99
150 x 75	FGB63	300 x 50	FGB122
150 x 100	FGB64	300 x 75	FGB123
150 x 150	FGB66	300 x 100	FGB124
200 x 50	FGB82	300 x 150	FGB126
200 x 75	FGB83	300 x 225	FGB129
200 x 100	FGB84	300 x 300	FGB1212

Internal Lid Gusset Bend - **IGB**



Size mm	Code	Size mm	Code
50 x 50	IGB22	200 x 150	IGB86
75 x 50	IGB32	200 x 200	IGB88
75 x 75	IGB33	225 x 50	IGB92
100 x 50	IGB42	225 x 75	IGB93
100 x 75	IGB43	225 x 100	IGB94
100 x 100	IGB44	225 x 150	IGB96
150 x 50	IGB62	225 x 225	IGB99
150 x 75	IGB63	300 x 50	IGB122
150 x 100	IGB64	300 x 75	IGB123
150 x 150	IGB66	300 x 100	IGB124
200 x 50	IGB82	300 x 150	IGB126
200 x 75	IGB83	300 x 225	IGB129
200 x 100	IGB84	300 x 300	IGB1212

External Lid Gusset Bend - **EGB**



Size mm	Code	Size mm	Code
50 x 50	EGB22	200 x 150	EGB86
75 x 50	EGB32	200 x 200	EGB88
75 x 75	EGB33	225 x 50	EGB92
100 x 50	EGB42	225 x 75	EGB93
100 x 75	EGB43	225 x 100	EGB94
100 x 100	EGB44	225 x 150	EGB96
150 x 50	EGB62	225 x 225	EGB99
150 x 75	EGB63	300 x 50	EGB122
150 x 100	EGB64	300 x 75	EGB123
150 x 150	EGB66	300 x 100	EGB124
200 x 50	EGB82	300 x 150	EGB126
200 x 75	EGB83	300 x 225	EGB129
200 x 100	EGB84	300 x 300	EGB1212

Crossover - **CO**



Size mm	Code	Size mm	Code
50 x 50	CO22	200 x 150	CO86
75 x 50	CO32	200 x 200	CO88
75 x 75	CO33	225 x 50	CO92
100 x 50	CO42	225 x 75	CO93
100 x 75	CO43	225 x 100	CO94
100 x 100	CO44	225 x 150	CO96
150 x 50	CO62	225 x 225	CO99
150 x 75	CO63	300 x 50	CO122
150 x 100	CO64	300 x 75	CO123
150 x 150	CO66	300 x 100	CO124
200 x 50	CO82	300 x 150	CO126
200 x 75	CO83	300 x 225	CO129
200 x 100	CO84	300 x 300	CO1212

Crossover Square - **COSQ**



Size mm	Code	Size mm	Code
50 x 50	COSQ22	200 x 150	COSQ86
75 x 50	COSQ32	200 x 200	COSQ88
75 x 75	COSQ33	225 x 50	COSQ92
100 x 50	COSQ42	225 x 75	COSQ93
100 x 75	COSQ43	225 x 100	COSQ94
100 x 100	COSQ44	225 x 150	COSQ96
150 x 50	COSQ62	225 x 225	COSQ99
150 x 75	COSQ63	300 x 50	COSQ122
150 x 100	COSQ64	300 x 75	COSQ123
150 x 150	COSQ66	300 x 100	COSQ124
200 x 50	COSQ82	300 x 150	COSQ126
200 x 75	COSQ83	300 x 225	COSQ129
200 x 100	COSQ84	300 x 300	COSQ1212

**Note:** For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code.

3 Compartment is available starting from 150x50.


See part code guide on page 128 for more details.

All trunking accessories are available as TX Security Fixing Trunking. See part code guide on page 128.

# Single Compartment Cable Trunking Accessories

## Tees

Flat Lid Tee Gusset - **FGT**



Size mm	Code	Size mm	Code
50 x 50	FGT22	200 x 150	FGT86
75 x 50	FGT32	200 x 200	FGT88
75 x 75	FGT33	225 x 50	FGT92
100 x 50	FGT42	225 x 75	FGT93
100 x 75	FGT43	225 x 100	FGT94
100 x 100	FGT44	225 x 150	FGT96
150 x 50	FGT62	225 x 225	FGT99
150 x 75	FGT63	300 x 50	FGT122
150 x 100	FGT64	300 x 75	FGT123
150 x 150	FGT66	300 x 100	FGT124
200 x 50	FGT82	300 x 150	FGT126
200 x 75	FGT83	300 x 225	FGT129
200 x 100	FGT84	300 x 300	FGT1212

Internal Lid Tee Gusset - **IGT**



Size mm	Code	Size mm	Code
50 x 50	IGT22	200 x 150	IGT86
75 x 50	IGT32	200 x 200	IGT88
75 x 75	IGT33	225 x 50	IGT92
100 x 50	IGT42	225 x 75	IGT93
100 x 75	IGT43	225 x 100	IGT94
100 x 100	IGT44	225 x 150	IGT96
150 x 50	IGT62	225 x 225	IGT99
150 x 75	IGT63	300 x 50	IGT122
150 x 100	IGT64	300 x 75	IGT123
150 x 150	IGT66	300 x 100	IGT124
200 x 50	IGT82	300 x 150	IGT126
200 x 75	IGT83	300 x 225	IGT129
200 x 100	IGT84	300 x 300	IGT1212

External Lid Tee Gusset - **EGT**



Size mm	Code	Size mm	Code
50 x 50	EGT22	200 x 150	EGT86
75 x 50	EGT32	200 x 200	EGT88
75 x 75	EGT33	225 x 50	EGT92
100 x 50	EGT42	225 x 75	EGT93
100 x 75	EGT43	225 x 100	EGT94
100 x 100	EGT44	225 x 150	EGT96
150 x 50	EGT62	225 x 225	EGT99
150 x 75	EGT63	300 x 50	EGT122
150 x 100	EGT64	300 x 75	EGT123
150 x 150	EGT66	300 x 100	EGT124
200 x 50	EGT82	300 x 150	EGT126
200 x 75	EGT83	300 x 225	EGT129
200 x 100	EGT84	300 x 300	EGT1212

Flat Lid Tee Square- **FST**



Size mm	Code	Size mm	Code
50 x 50	FST22	200 x 150	FST86
75 x 50	FST32	200 x 200	FST88
75 x 75	FST33	225 x 50	FST92
100 x 50	FST42	225 x 75	FST93
100 x 75	FST43	225 x 100	FST94
100 x 100	FST44	225 x 150	FST96
150 x 50	FST62	225 x 225	FST99
150 x 75	FST63	300 x 50	FST122
150 x 100	FST64	300 x 75	FST123
150 x 150	FST66	300 x 100	FST124
200 x 50	FST82	300 x 150	FST126
200 x 75	FST83	300 x 225	FST129
200 x 100	FST84	300 x 300	FST1212

Internal Lid Tee Square - **IST**



Size mm	Code	Size mm	Code
50 x 50	IST22	200 x 150	IST86
75 x 50	IST32	200 x 200	IST88
75 x 75	IST33	225 x 50	IST92
100 x 50	IST42	225 x 75	IST93
100 x 75	IST43	225 x 100	IST94
100 x 100	IST44	225 x 150	IST96
150 x 50	IST62	225 x 225	IST99
150 x 75	IST63	300 x 50	IST122
150 x 100	IST64	300 x 75	IST123
150 x 150	IST66	300 x 100	IST124
200 x 50	IST82	300 x 150	IST126
200 x 75	IST83	300 x 225	IST129
200 x 100	IST84	300 x 300	IST1212

External Lid Tee Square - **EST**



Size mm	Code	Size mm	Code
50 x 50	EST22	200 x 150	EST86
75 x 50	EST32	200 x 200	EST88
75 x 75	EST33	225 x 50	EST92
100 x 50	EST42	225 x 75	EST93
100 x 75	EST43	225 x 100	EST94
100 x 100	EST44	225 x 150	EST96
150 x 50	EST62	225 x 225	EST99
150 x 75	EST63	300 x 50	EST122
150 x 100	EST64	300 x 75	EST123
150 x 150	EST66	300 x 100	EST124
200 x 50	EST82	300 x 150	EST126
200 x 75	EST83	300 x 225	EST129
200 x 100	EST84	300 x 300	EST1212

# Standard Cable Trunking Accessories

## Offset Bends & Reducers

### Horizontal Offset Bend Left - **H/OS/LH**




Size mm	Code	Size mm	Code
50 x 50	H/OS/LH22	200 x 150	H/OS/LH86
75 x 50	H/OS/LH32	200 x 200	H/OS/LH88
75 x 75	H/OS/LH33	225 x 50	H/OS/LH92
100 x 50	H/OS/LH42	225 x 75	H/OS/LH93
100 x 75	H/OS/LH43	225 x 100	H/OS/LH94
100 x 100	H/OS/LH44	225 x 150	H/OS/LH96
150 x 50	H/OS/LH62	225 x 225	H/OS/LH99
150 x 75	H/OS/LH63	300 x 50	H/OS/LH122
150 x 100	H/OS/LH64	300 x 75	H/OS/LH123
150 x 150	H/OS/LH66	300 x 100	H/OS/LH124
200 x 50	H/OS/LH82	300 x 150	H/OS/LH126
200 x 75	H/OS/LH83	300 x 225	H/OS/LH129
200 x 100	H/OS/LH84	300 x 300	H/OS/LH1212

### Horizontal Offset Bend Right - **H/OS/RH**



Size mm	Code	Size mm	Code
50 x 50	H/OS/RH22	200 x 150	H/OS/RH86
75 x 50	H/OS/RH32	200 x 200	H/OS/RH88
75 x 75	H/OS/RH33	225 x 50	H/OS/RH92
100 x 50	H/OS/RH42	225 x 75	H/OS/RH93
100 x 75	H/OS/RH43	225 x 100	H/OS/RH94
100 x 100	H/OS/RH44	225 x 150	H/OS/RH96
150 x 50	H/OS/RH62	225 x 225	H/OS/RH99
150 x 75	H/OS/RH63	300 x 50	H/OS/RH122
150 x 100	H/OS/RH64	300 x 75	H/OS/RH123
150 x 150	H/OS/RH66	300 x 100	H/OS/RH124
200 x 50	H/OS/RH82	300 x 150	H/OS/RH126
200 x 75	H/OS/RH83	300 x 225	H/OS/RH129
200 x 100	H/OS/RH84	300 x 300	H/OS/RH1212

### Verticle Offset - **V/OS**




Size mm	Code	Size mm	Code
50 x 50	V/OS22	200 x 150	V/OS86
75 x 50	V/OS32	200 x 200	V/OS88
75 x 75	V/OS33	225 x 50	V/OS92
100 x 50	V/OS42	225 x 75	V/OS93
100 x 75	V/OS43	225 x 100	V/OS94
100 x 100	V/OS44	225 x 150	V/OS96
150 x 50	V/OS62	225 x 225	V/OS99
150 x 75	V/OS63	300 x 50	V/OS122
150 x 100	V/OS64	300 x 75	V/OS123
150 x 150	V/OS66	300 x 100	V/OS124
200 x 50	V/OS82	300 x 150	V/OS126
200 x 75	V/OS83	300 x 225	V/OS129
200 x 100	V/OS84	300 x 300	V/OS1212

### Reducer- **RED**



#### Reducer Ordering Guide:

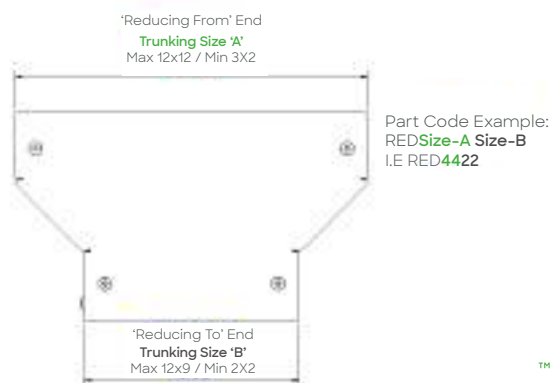

**Note:** Speak to our Technical Team if you require bespoke Offset sizes. For 2 Compartment and 3 Compartment trunking, add either '2C' or '3C' to the end of the part code. 3 Compartment is available starting from 150x50. See part code guide on page 128 for more details.

# Universal Accessories

## Universal Accessories Guide

Stop End - **EC**



Flange - **FE**



Hanger - **HC**



Stop End	
Part Code	Description
EC22	50X50 Stop End
EC32	75X50 Stop End
EC33	75X75 Stop End
EC42	100X50 Stop End
EC43	100X75 Stop End
EC44	100X100 Stop End
EC62	150X50 Stop End
EC63	150X75 Stop End
EC64	150X100 Stop End
EC66	150X150 Stop End
EC82	200X50 Stop End
EC83	200X75 Stop End
EC84	200X100 Stop End
EC86	200X150 Stop End
EC88	200x200 Stop End
EC92	225x50 Stop End
EC93	225x75 Stop End
EC94	225x100 Stop End
EC96	225x150 Stop End
EC98	225x200 Stop End
EC99	225x225 Stop End
EC122	300x50 Stop End
EC123	300x75 Stop End
EC124	300x100 Stop End
EC126	300x150 Stop End
EC128	300x200 Stop End
EC129	300x225 Stop End
EC1212	300x300 Stop End

Stop End	
Part Code	Description
FE22	50X50 Flange End
FE32	75X50 Flange End
FE33	75X75 Flange End
FE42	100X50 Flange End
FE43	100X75 Flange End
FE44	100X100 Flange End
FE62	150X50 Flange End
FE63	150X75 Flange End
FE64	150X100 Flange End
FE66	150X150 Flange End
FE82	200X50 Flange End
FE83	200X75 Flange End
FE84	200X100 Flange End
FE86	200X150 Flange End
FE88	200X200 Flange End
FE92	225X50 Flange End
FE93	225X75 Flange End
FE94	225X100 Flange End
FE96	225X150 Flange End
FE98	225X200 Flange End
FE99	225X225 Flange End
FE122	300X50 Flange End
FE123	300X75 Flange End
FE124	300X100 Flange End
FE126	300X150 Flange End
FE128	300X200 Flange End
FE129	300X225 Flange End
FE1212	300X300 Flange End

Hanger	
Part Code	Description
HC22	50X50 Trunking Hanger
HC32	75X50 Trunking Hanger
HC33	75X75 Trunking Hange
HC42	100X 50 Trunking Hanger
HC43	100X75 Trunking Hanger
HC44	100X100 Trunking Hanger
HC62	150X 50 Trunking Hanger
HC63	150X75 Trunking Hanger
HC64	150X100 Trunking Hanger
HC66	150X150 Trunking Hanger

TM

To order Universal Accessories please state the part type abbreviation followed by the size.

Stop End (EC) and Flange (FE) are also available as part of the Security Fixing (TX) range.

## Universal Accessories

### Twin Socket Lid - **TSO**



#### Twin Socket Lids

##### 3 Compartment

TSO/4/3C

TSO/6/3C

TSO/8/3C

TSO/9/3C

TSO/12/3C

##### 2 Compartment

TSO/4/2C

TSO/6/2C

TSO/8/2C

TSO/9/2C

TSO/12/2C

### Single Socket Lid - **SSO**



#### Single Socket Lids

##### 3 Compartment

SSO/4/3C

SSO/6/3C

SSO/8/3C

SSO/9/3C

SSO/12/3C

##### 2 Compartment

SSO/4/2C

SSO/6/2C

SSO/8/2C

SSO/9/2C

SSO/12/2C

3C can also be used for single compartment trunking

### Bell Mouth - **BM**



Available from sizes 50x50 to 300x300

### Earth Links - **ES99**



### Lid Fixing - **TB1**



### Lid Fixing - **TB3**



For 3 inch assemblies only

### Cable Retainer - **CS**




Available in trunking width sizes

### IP4X Lid Cover Strap - **LC**



Available in trunking width sizes

### Pin Rack - **VT**



Available from 50x50 to 300x300



---

# Multi-Compartment & Gasketed Trunking

## Multi-Compartment Trunking & Fly-Overs

---

- Partitions manufactured from galvanised steel spot welded into position
- Partitions can also be supplied for loose on-site fixing
- Trunking with unequal spaced compartments can be supplied - Please state sizes required at time of ordering
- All accessories shown on the single compartment page can be manufactured to suit multi-compartment
- All compartments are equally spaced unless requested
- Compartments are equally spaced as standard
- Speak to our technical team for unequal compartments



### Fly-Overs

- Fly-Overs are supplied with all tees and crossovers
- Approximately 50% of cable capacity is lost when fitting a Fly-Over



## Gasketed Trunking for External Use (IP54)

---

All the sizes shown in single and multi-compartment sections can be manufactured to prevent ingress of dust and liquids (IP54).

This innovative system is designed with an outward returned flange on the body with an overlapping lid, which is fitted with EDPM both sides along its entire length. When installed, the gasket is compressed between body and lid by mushroom screws which fix into captive bushes on the outward flanges.

Trunking manufactured to this design will provide IP54 protection and is supplied in 2 metres lengths maximum.


Atkore Unistrut also offer a complete range of fully gasketed accessories.




TM

## Typical Profiles - Skirting & Dado


Top Chamfer Skirting- **TC**

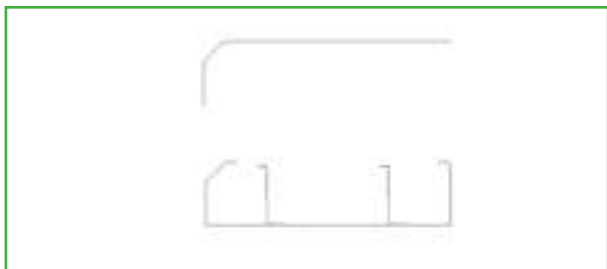


Top Flat Skirting - **TF**

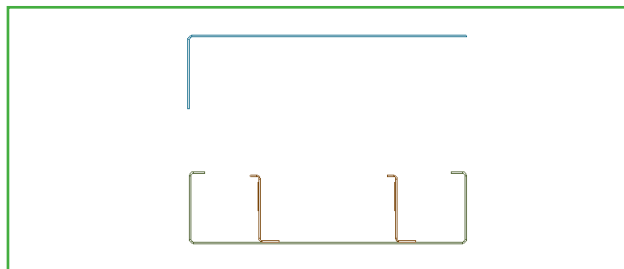


Chamfered Dado - **CD**

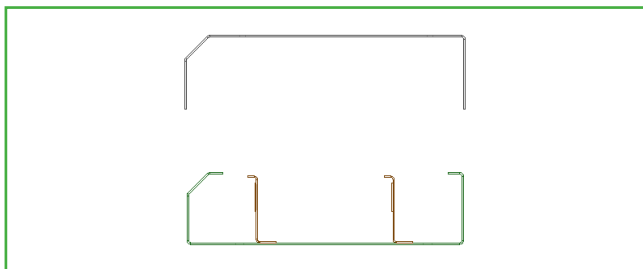

Square Dado - **SD**

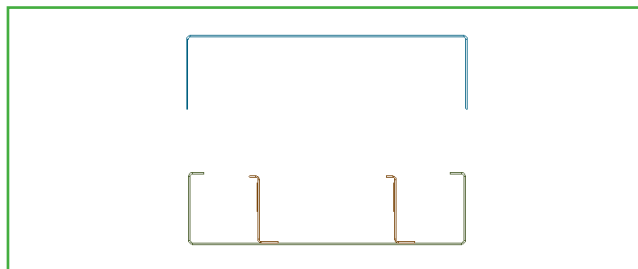

Double Chamfer Dado - **DCD**

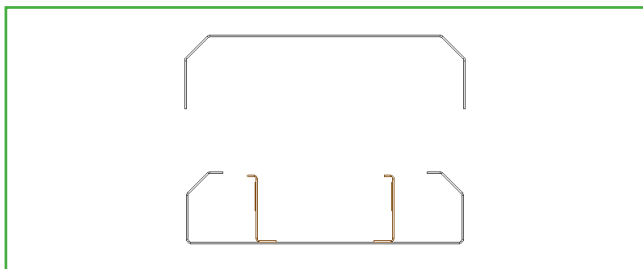

---

# Perimeter Systems

## How to order Skirting & Dado Trunking

---

### How to order Perimeter Trunking guide:

- To order Skirting/Dado Trunking, select the trunking family (see page 146), the size (see table below), and the compartment 2C or 3C

### For example:

- Square Dado Trunking in size 6x2 in 2 Compartments
- Take trunking reference **SD** + size **62** + 2 compartment **2C** to give **SD62/2C**

Perimeter Systems Size Guide	
62 (6x2)	2C
82 (8x2)	3C*

\*Not available in all parts

### How to order Perimeter Trunking Accessories guide:

- To order Skirting/Dado Trunking Accessories, simply select the trunking family, the size, the compartment and the accessory

### For example:

- Top Chamfer Skirting Trunking 90° Internal Bend in size 6x2 in 2 Compartments
- Take trunking reference **TC** + size **62** + 2 compartment **2C** + 90° Internal Bend **ISB** to give **TC62/2C/ISB**

TM




# Skirting Trunking

## Skirting Trunking

Skirting Trunking is supplied in 2 metre lengths, comprising a Galvanised sheet steel body with powder coated overlapping lid, in the colour white as standard. A cover strap is provided with each length of lid. This reduces the necessity for special on-site cutting requirements, as the strap covers any cut edges.

### Features:


- 20mm knockouts in the partition at the 250mm centres, allowing easy positioning of outlet plates, which require screening via the steel back box that fixes to the partition
- Chamfered or flat top options as standard
- Other powder coated finishes are available even when only a short run of trunking is required
- 2 or 3 compartments are most commonly used. However, systems to suit client's individual requirements can be manufactured with the same short lead time

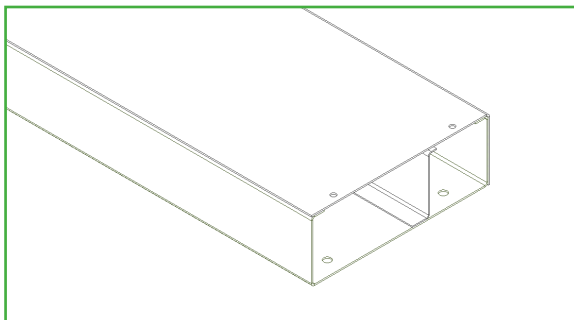

150mm x 50mm

**TF62/2C**


2 Comp, top 50mm - bottom 100mm

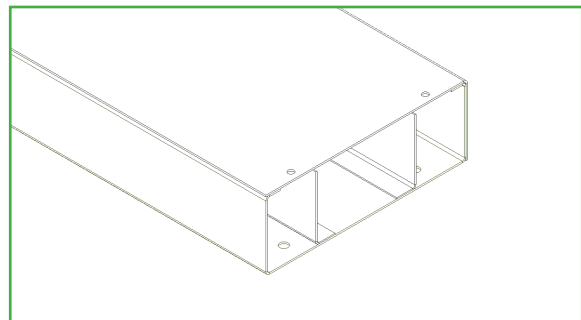

200mm x 50mm

**TF82/3C**


3 Comp, top 50mm, centre 100mm, bottom 50mm

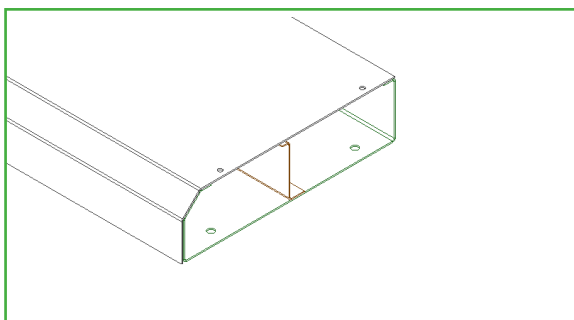

150mm x 50mm

**TC62/2C**

2 Comp, top 50mm - bottom 100mm

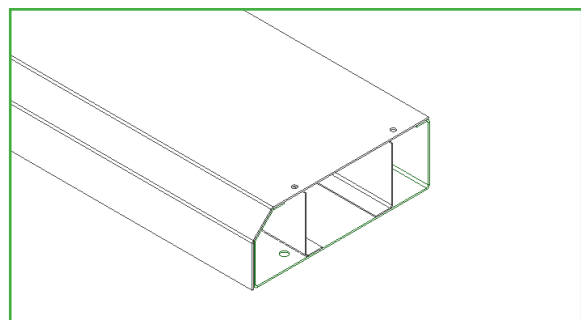

200mm x 50mm

**TC82/3C**

3 Comp, top 50mm, centre 100mm & bottom 50mm


Please note: The accessories on Page 149 show images for **TC** Skirting Trunking as an example.

To order **TF** Skirting Trunking, add '**TF**' to the start of the part code. For example, **TF** + size **62** + 2 compartment **2C** +


90° Internal Bend **ISB** to give **TF62/2C/ISB**

# Trunking Accessories


## Skirting Accessories - TC Range

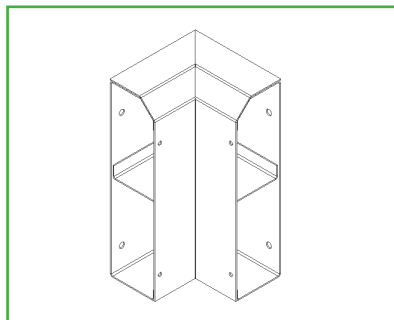


90° Internal Bend **ISB**  
45° Internal Bend **IB**

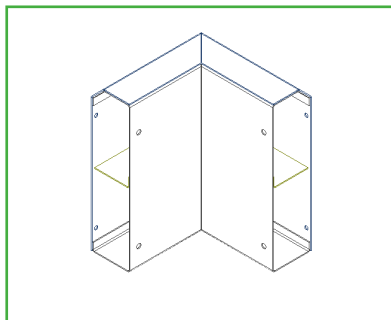


90° External Bend **ESB**  
45° External Bend **EB**

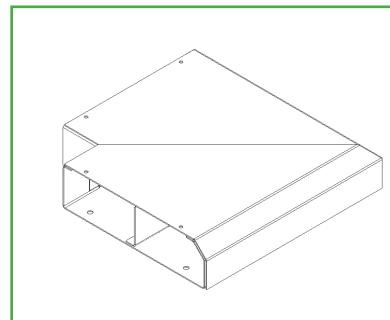


Flat Bend (downward) **FSB/D**

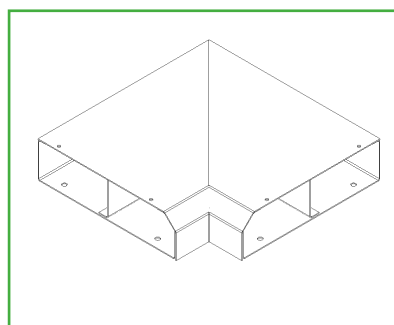


Flat Bend (Upward) **FSB/U**

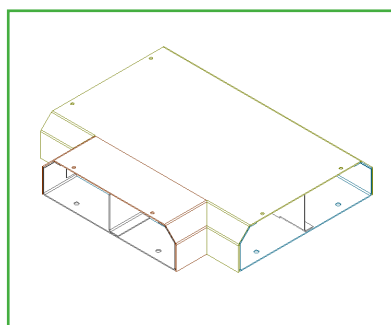


Flat Tee (Up) Left **FST/LH-U**  
Flat Tee (Up) Right **FST/RH-U**

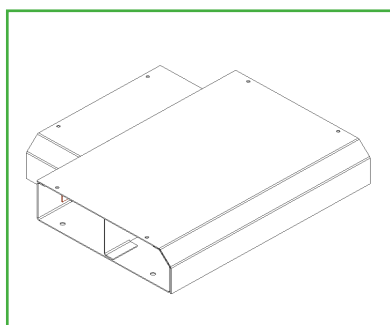


Flat Tee (Down) Left **FST/LH-D**  
Flat Tee (Down) Right **FST/RH-D**

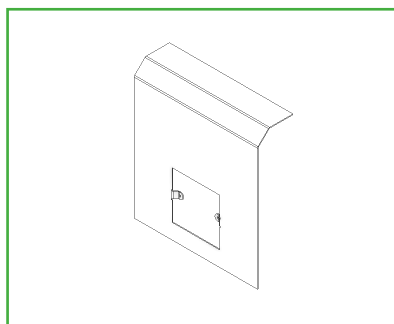


Single Socket Lid 2C Bottom  
**2C/SSOBTM**

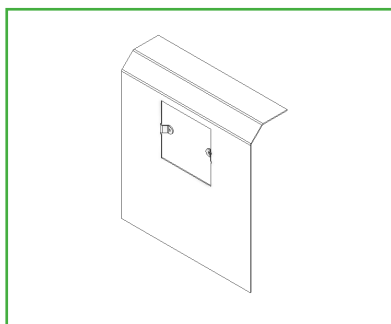


Single Socket Lid 2C Top  
**2C/SSOTOP**

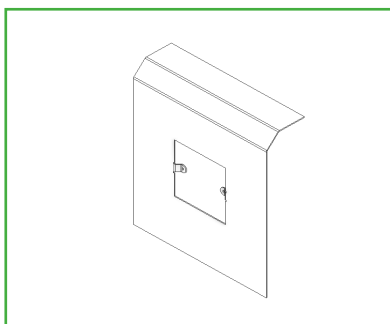


Single Socket Lid 3C  
**3C/SSO**

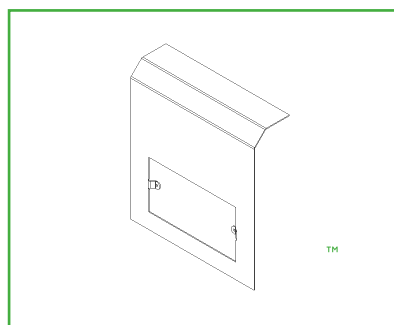

Twin Socket Lid 2C Bottom  
**2C/TSOBTM**

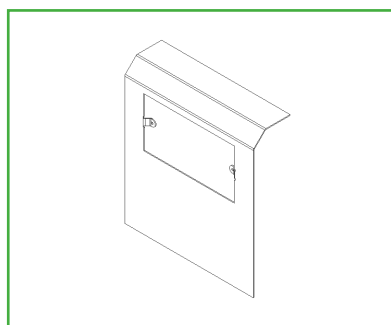


Twin Socket Lid 2C Top  
**2C/TSOTOP**

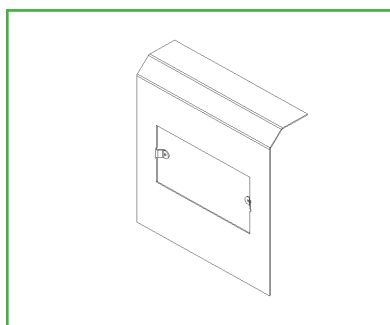


Twin Socket Lid 3C  
**3C/TSO**

## Skirting Accessories


### TF Range Socket Plates

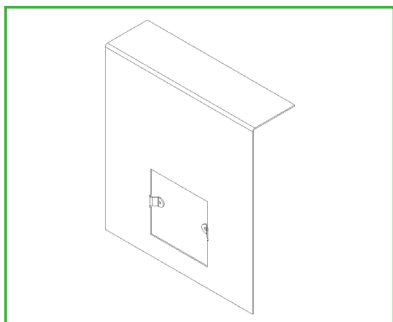


Single Socket Lid 2C Bottom  
**2C/SSOBTM**

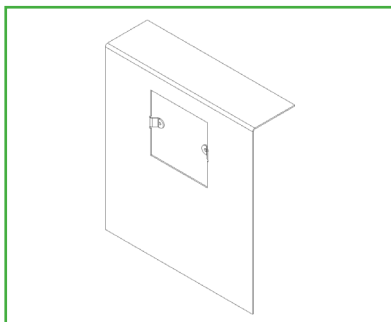


Single Socket Lid 2C Top  
**2C/SSOTOP**

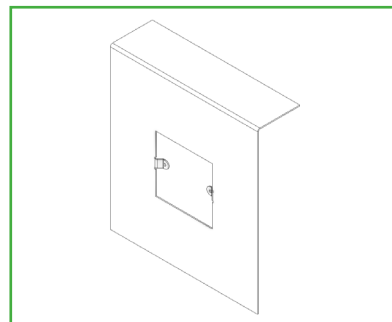


Single Socket Lid 3C  
**3C/SSO**

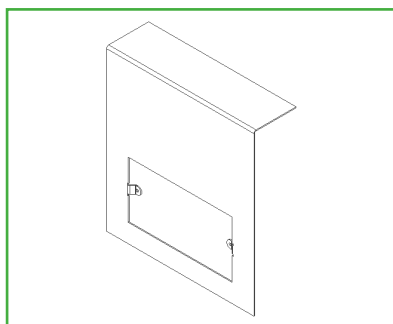

Twin Socket Lid 2C Bottom  
**2C/TSOBTM**

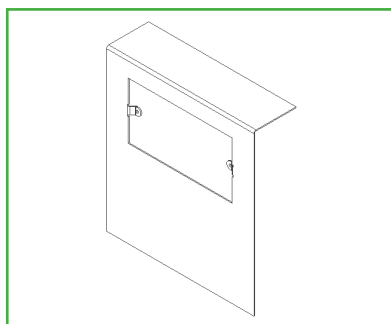

Twin Socket Lid 2C Top  
**2C/TSOTOP**

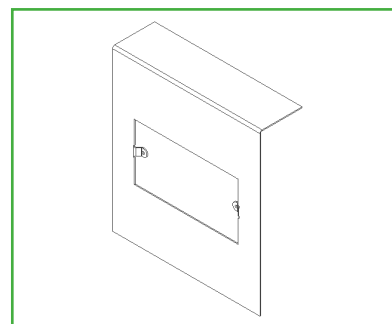

Twin Socket Lid 3C  
**3C/TSO**

### How to order guide:

Accessory part numbers are the same for all styles of skirting and dado. It is the trunking part number pre-fixed before the accessory that ensures you get the correct item

**For example:** A twin socket outlet lid for 200mm x 50mm, 3 compartment flat top skirting. Take trunking reference **TF82/3C** + accessory part number **TSO** to give **TF82/3C/TSO** or **TF82** + accessory part number **EC/LH** to give **TF82/EC/LH**

### Factory Manufactured Sets

- Pier sets and off sets can be pre-made, therefore minimising labour costs.



End cap left hand **EC/LH**



End cap righthand **EC/RH**



Back Box (Single) **SS/SB**  
Back Box (Twin) **TS/SB**

---

# Dado Trunking

## Dado Trunking

---

Dado Trunking is supplied in 2 metre lengths. Manufactured to the same high quality as our skirting trunking, Dado trunking is designed to be installed around the perimeter above floor level, allowing for optimum use of floor space.

### Features:

- Chamfer Top, Flat Top or Double Chamfer Dado options are available as standard
- 20mm knockouts in the partition at the 250mm centres, allowing easy positioning of outlet plates, which require screening via the steel back box that fixes to the partition
- Other powder coated finishes are available
- 2 or 3 compartments are most commonly used. However, systems to suit client's individual requirements can be manufactured



150mm x 50mm

**SD62/2C**

2 Compartment, top 50mm - bottom 100mm



200mm x 50mm

**SD82/3C**

3 Compartment, top 50mm, centre 100mm bottom 50mm



150mm x 50mm

**CD62/2C**

2 Compartment, top 50mm - bottom 100mm




200mm x 50mm

**CD82/3C**

3 Comp, top 50mm, centre 100mm & bottom 50mm

# Dado Trunking


## Dado Trunking - DCD Range

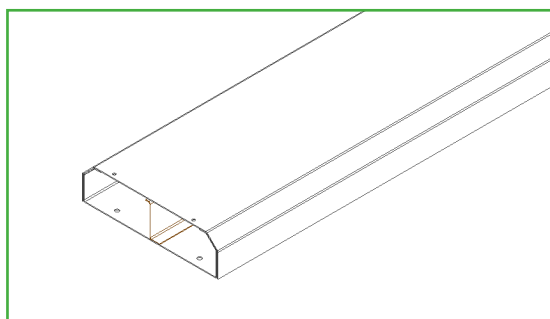

100mm x 100 mm

**DCD/82/2C**

2 Compartment, top 100mm, bottom 100mm

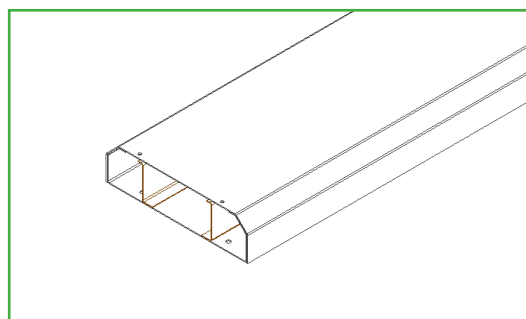

200mm x 50 mm

**DCD/82/3C**


3 Compartment, top 50mm, centre 100mm, bottom 50mm

### How to order guide:


Accessory part numbers are the same for all styles of skirting and dado. It is the trunking part number pre-fixed before the accessory that ensures you get the correct item.

### For example:


- An external bend for 200mm x 50mm, 2 compartment double chamfer dado
- Take trunking reference **DCD82/2C** + accessory part number **ESB** to give **DCD82/2C/ESB**

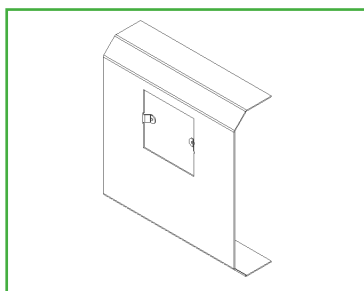


Single Socket Lid 2C  
**2C/SSO**

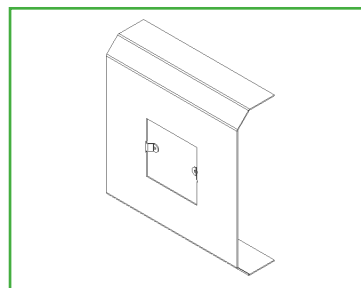

Single Socket Lid 3C  
**3C/SSO**

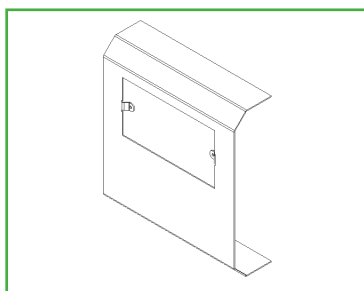

Twin Socket Lid 2C  
**2C/TSO**

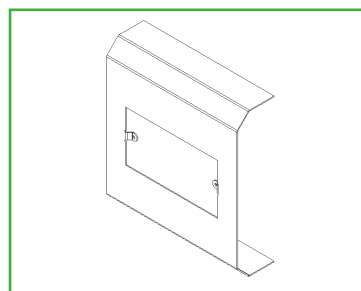


Twin Socket Lid 3C  
**3C/TSO**

Please note: The socket lids above show images for **DCD** Dado Trunking as an example.




# Dado Trunking

## Dado Accessories - 2 Compartment

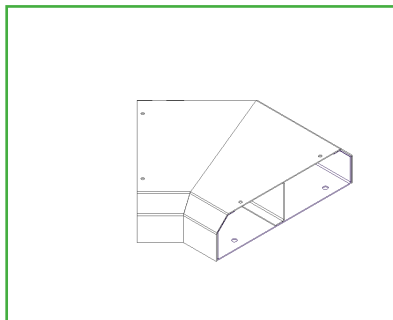


45° Flat Bend

**FB**

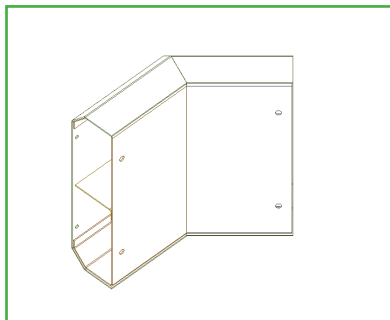


45° External Bend

**EB**

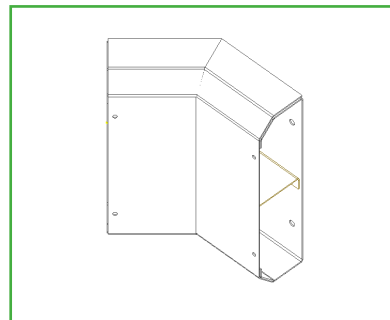


45° Internal Bend

**IB**

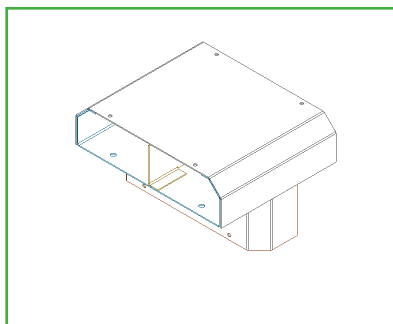


External Tee

**EST**

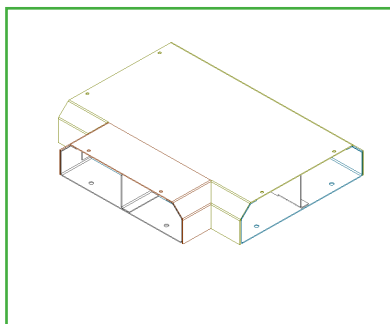


Flat tee

**FST**

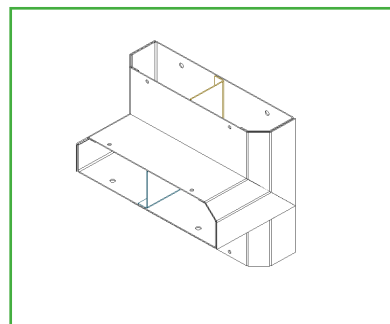


Internal Tee

**IST**

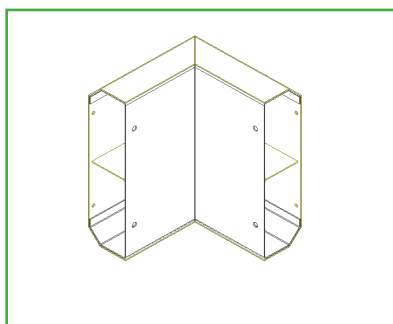


90° External Bend Square

**ESB**

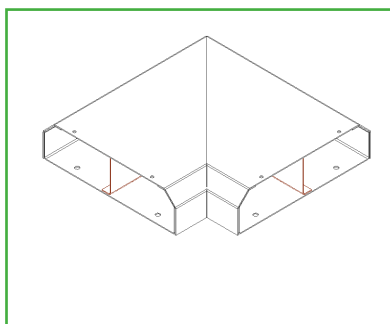


90° Flat Bend Square

**FSB**

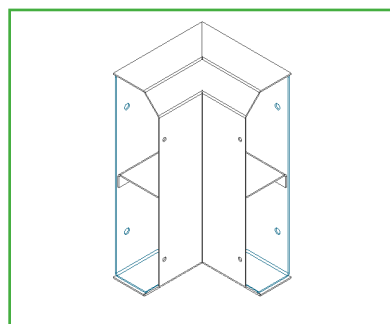


90° Internal Bend Square

**ISB**

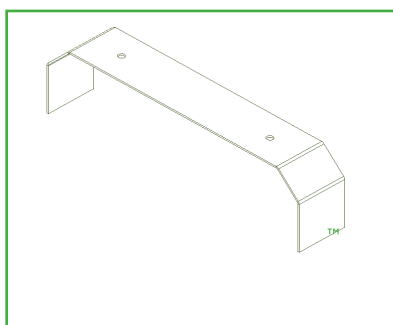

Cover Strap

**LC**

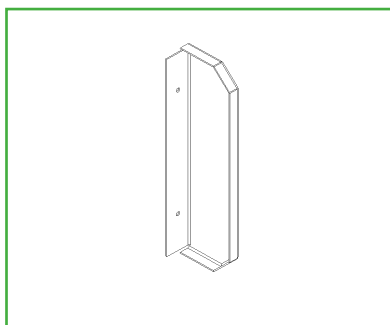

End Cap

**EC**

Please note: The accessories above show images for **DCD** Dado Trunking as an example.

To order **SD** or **CD** Dado Trunking, add '**SD**' or '**CD**' to the start of the part code.

For example, **SD** + size **62** + 2 compartment **2C** + 90° Internal Bend **ISB** to give **SD62/2C/ISB**

# Flush Floor Shallow Screeds

## Flush Floor Shallow Screeds

Flush Floor Trunking body is supplied in 2 metre lengths complete with 2 x 1 metre lengths of lid secured by means of flush all steel turnbuckle fasteners. Each length of Flytec trunking is supplied with one external fitting connector.

Lids are manufactured from 3mm thick Galvanised steel. They are fully removable and may be flush or recessed by 3mm as standard. Other depths of recess can also be supplied.

It is advisable that all lid sections are fitted during screeding. This will prevent any slight inward movement to the sides of trunking body.

Atkore Unistrut recommend that Flush Floor Trunking is installed on a ribbon screed or similar to ensure support along the entire length and width of the system.

### D1 - Flush Screeds



150mm x 38mm **D1/615/2C**

150mm x 50mm **D1/62/2C**



228mm x 38mm **D1/915/3C**

228mm x 38mm **D1/92/2C**

### D2 - Recessed Screed



150mm x 38mm **D2/615/2C**

150mm x 50mm **D2/62/2C**



228mm x 38mm **D2/915/3C**

228mm x 38mm **D2/92/2C**

### How to order Flush Floor Trunking guide:

- To order Flush Floor Trunking, simply select the trunking (**D1** or **D2**), the size (see table below), and the compartment **2C** or **3C**


#### For example:

- D1 trunking, size 6x1 with 2 Compartments
- Take trunking reference **D1** + size **61** + 2 compartment **2C** to give **D1/61/2C**


Flush Floor Size Guide		
61 (6X1)	615 (6X1.5)	62 (6X2)
91 (9X1)	915 (9X1.5)	92 (9X2)
121 (12X1)	1215 (12X1.5)	122 (12X2)

## Flush Floor Shallow Screeds


### Flush Floor Service Boxes

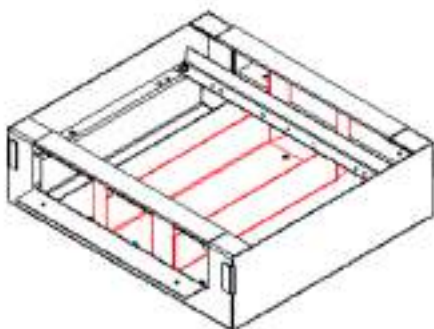


**3/3** - 3 Compartment Service Box to suit 3 Compartment Trunking

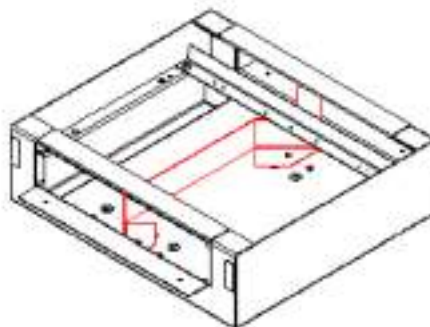

**3/2** - 3 Compartment Service Box to suit 2 Compartment Trunking

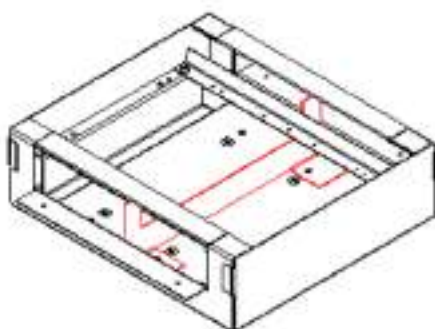


**4/2** - 4 Compartment Service Box to suit 2 Compartment Trunking

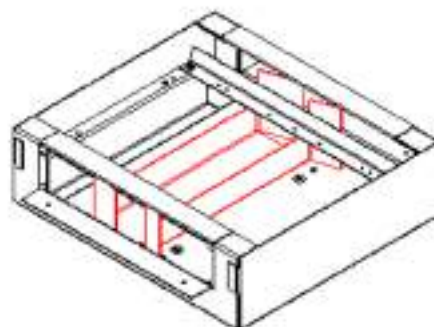


**4/30C\*** - 4 Compartment Service Box to suit 3 Compartment Trunking

\*OC = Off Centre

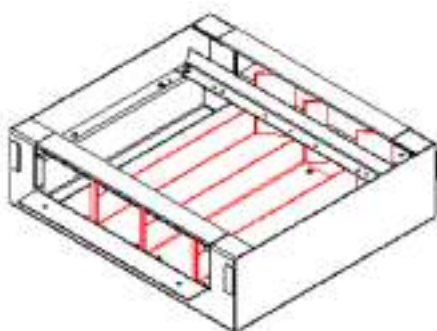

**4/4** - 4 Compartment Service Box to suit 4 Compartment Trunking

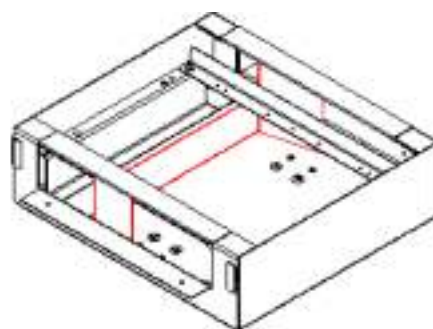

**4/20C\*** - 4 Compartment Service Box to suit 2 Compartment Trunking

\*OC = Off Centre

\*All sockets or variation of plates can be supplied on request.

# Flush Floor Shallow Screeds

## Flush Floor Shallow Screeds

Service outlet boxes are available for shallow screed trunking.

- The underside of the box must be set lower into the floor to enable cables to pass under the socket outlet plates whilst maintaining lids to finish level with screed
- Carpet trim and lid assembly are manufactured in a tough plastic moulding which has two individual hinged cable outlets in dark grey
- The lid is reinforced by a 3mm steel plate.
- Carpet recess is 6mm


\*Refer to page 161 for service boxes



Angle Junction Box **ASL**



Tee Junction Box **AST**

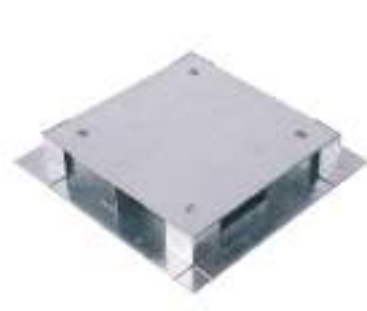

Crossover Junction Box **ASX**



Riser Bend **ISB**



Riser Bend (back entry) **ISB/BE**



Stop End **EC**

Flat Bends & Tees are available on request. Contact the team for more information.

### How to order Flush Floor Trunking Accessories guide:

- To order Flush Floor Trunking Accessories or Junction Boxes, select the trunking (**D1** or **D2**), the size (see table on page 158), the compartment **2C** or **3C** and the accessory part code

### For example:

- **D1** Riser Bend size 6x1 with 2 Compartments
- Take trunking reference **D1** + size **61** + 2 compartment **2C** + **-ISB** to give **D1/61/2C-ISB**

# Flush Floor Shallow Screeds

## Flush Floor Service Boxes

### How to order Flush Floor Services Boxes guide:

- To order Flush Floor Service Boxes, select the trunking (**D1** or **D2**), the size (see table below), and the Service Box part code

### For example:

- D1 3/2 Service Box in size 6x1
- Take trunking reference **D1** + size **61SB** + - **3/2** to give **D1/61SB-3/2**

Flush Floor D1 & D2 Service Boxes	
Trunking Style	Sizes
D1 or D2	61SB
D1 or D2	91SB
D1 or D2	121SB
D1 or D2	615SB
D1 or D2	915SB
D1 or D2	1215SB
D1 or D2	62SB
D1 or D2	92SB
D1 or D2	122SB

Service Boxes
3/2
3/3
4/2
4/2OC
4/3OC
4/4

Flush Floor Size Guide		
61 (6X1)	615 (6X1.5)	62 (6X2)
91 (9X1)	915 (9X1.5)	92 (9X2)
121 (12X1)	1215 (12X1.5)	122 (12X2)

# D6 Flush Floor Trunking Service Outlet Systems

## D6 Flush Floor Trunking

Flytec's flush floor trunking is supplied in 2 metre lengths, including 400mm lengths of removable lid which are interchangeable with a service outlet box, thus giving the designer flexibility of positioning within a screeded floor installation.

Flytec lids that are manufactured from 3mm thick Galvanised Steel are fixed to the trunking body by countersunk zinc plated steel turnbuckle fasteners, providing speed of fitting by the installer and maximum rigidity of the finished product.

### Key Features

- Available in two or three compartments
- It is advisable that all lid sections are fitted during screeding. This will prevent any slight inward movement to the sides of trunking body

The Flush Floor Trunking is installed on a ribbon screed or similar to ensure support along the entire length and width of the system.



### How to order D6 Flush Floor Trunking & Accessories guide:

- To order D6 Flush Floor Trunking, select the trunking and the compartment (see table below)
- For accessories, simply add the accessory part number to the end of the code

### For example:

- D6 2 Compartment Trunking
- Take trunking reference **D6/C** + 2 compartment **15** to give **D6/C/15**
- D6 Riser Bend 2 Compartment Trunking
- Take trunking reference **D6/C** + 2 compartment **15** + **ISB** to give **D6/C/15/ISB**

D6 Flush Floor Guide	
15	2 Compartment
16	3 Compartment

# D6 Flush Floor Trunking & Accessories

D6 Flush Floor Trunking



2 Compartment Size 235mm x 65mm **D6/C/15**



3 Compartment Size 330mm x 65mm **D6/C/16**

## D6 Flush Floor Trunking Accessories



Angle Junction Box **ASL**



Crossover Junction Box **ASX**



Tee Junction Box **AST**



Riser Bend (back entry) **ISB/BE**



Riser Bend **ISB**



Stop End **EC**

TM

# D6 Flush Floor Trunking

## Flush Floor Service Outlet Boxes

### Two Compartment Service Box

- 2 compartment service box designed to fit into the trunking anywhere along the system layout excluding junction points
- Please refer to Page 171 for Service Box Plates (not included)



Two Compartment Service Box

D6/C/15/SB

### Three Compartment Service Box

- 3 compartment service box designed to fit into the trunking anywhere along the system layout excluding junction points
- All sockets or variation of plates can be supplied on request
- Carpet trim & lid assembly manufactured in a tough plastic moulding containing two individual hinged cable outlets in dark grey
- The lid is reinforced by a 3mm steel plate and the carpet recess is 6mm



Three Compartment Service Box

D6/C/16/SB



# Underfloor Trunking

## Underfloor Trunking

Underfloor Trunking is designed for placing on the constructional concrete slab, to be completely covered when the final floor screed is laid and the service outlet positions fixed.

- Steel Underfloor Trunking is manufactured in 2 metre lengths
- Two or three compartment are most commonly used
- Single or other numbers of compartments can also be supplied
- The trunking lengths are a total welded construction with no need to couple together loose channel sections
- Each length is joined together by a saddle clamp and plate, which prevent any ingress of screed into the duct

### 2 Compartment



150mm x 25mm **E2/61**

150mm x 50mm **E2/62**

### 3 Compartment



225mm x 25mm **E3/91**

225mm x 50mm **E3/92**

### How to order Underfloor Trunking guide:

- To order Underfloor Trunking, select the trunking and the compartment (see table below)
- For accessories, see page 166

### For example:

- E2 2 Compartment Trunking in size 6x1
- Take trunking reference **E2** + size **61** to give **E2/61**

Underfloor Compartment Guide	
E2	2 Compartment
E3	3 Compartment

Underfloor Size Guide		
61 (6X1)	615 (6X1.5)	62 (6X2)
91 (9X1)	915 (9X1.5)	92 (9X2)
121 (12X1)	1215 (12X1.5)	122 (12X2)

## Underfloor Trunking Accessories


### Underfloor Trunking

- Junction boxes part numbers UF/JB (75mm deep as standard, other depths available)
- Junction boxes are supplied with flange couplers and blank plates to enable use as angles, tees or 4 way
- Each box is complete with Fly-Over for cable segregation
- Carpet recess is 6mm
- Please note: Junction boxes cannot be used to house sockets or data outlets



Riser Bend

ISB

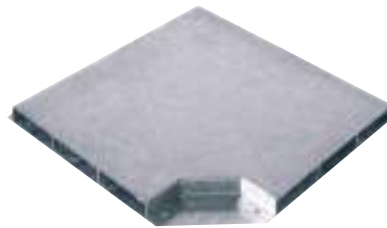

90° Flat Bend  
45° Flat Bend

FSB  
FB




Riser Bend (back entry) ISB/BE



End Cap

EC



Connector Plate

Conn



Earth Link

ES99

### How to order Underfloor Trunking Accessories guide:

- To order Underfloor Trunking Accessories, simply use the code **UF** followed by the size (see table on page 165), the compartment and the accessory part number

### For example:

- Underfloor Riser Bend in size 6x1
- Take trunking reference **UF** + size **61** + 2 Compartment **2C** + accessory code **ISB** to give **UF/61/2C/ISB**

TM

# Underfloor Trunking Accessories

## Underfloor Service Boxes

### Three Compartment Service Box

- 75mm deep as standard, other depths available on request
- Additional sockets or a variation of plates can be supplied on request
- Carpet trim and lid assembly manufactured in a tough plastic moulding which has two individual hinged cable outlets in dark grey
- The lid is reinforced by a 3mm steel plate
- Carpet recess is 6mm.
- Socket plates sold separately, see page 171



### How to order Underfloor Services Boxes guide:

- To order Underfloor Service Boxes, use code **UF**, the size (see table below), and the Service Box part code

### For example:

- Underfloor 3/2 Service Box in size 6x1
- Take **UF** + size **61SB** + **-3/2** to give **UF/61SB-3/2**

Service Box Ordering Guide	
Part Code	Sizes
UF	61SB
UF	91SB
UF	121SB
UF	615SB
UF	915SB
UF	1215SB
UF	62SB
UF	92SB
UF	122SB

Service Boxes
3/2
3/3
4/2
4/2OC
4/3OC
4/4


Underfloor Size Guide		
61 (6X1)	615 (6X1.5)	62 (6X2)
91 (9X1)	915 (9X1.5)	92 (9X2)
121 (12X1)	1215 (12X1.5)	122 (12X2)

# Service Outlet Boxes

## Service Outlet Boxes

### Service Outlet Boxes

- For screed or raise floor applications
- Available in 2, 3 or 4 compartments
- Outer box with 20mm and 25 mm knockouts of two sides
- Standard box depth is 75mm, other sizes are available
- A wide range of outlet plates to carry voice, data and power sockets
- Available with a dark grey carpet trim fitted as standard or a stainless steel trim
- Deep lid recess boxes can be manufactured to accommodate stone, marble or timber infill

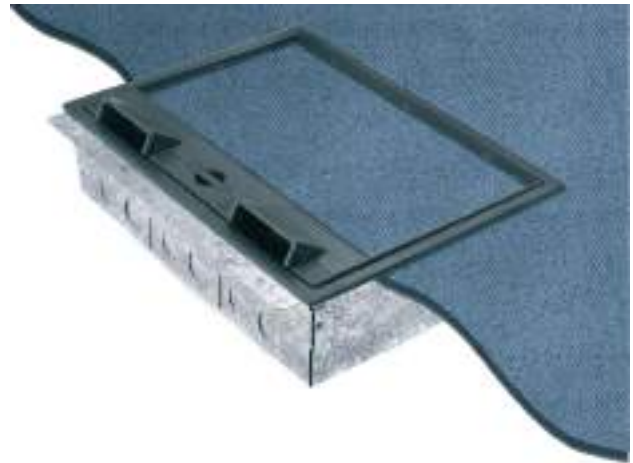

TM

## Service Outlet Boxes



Three compartment service box

CAV/3  
SCD/3



Four compartment service box

CAV/4  
SCD/4

### 3 Compartment Box (Raised Floor)

- Floor cut-out size 304mm x 221mm
- Socket Plates sold separately, see page 171

### 4 Compartment Box (Raised Floor)

- Floor cut-out size is 204mm x 221mm
- Socket Plates sold separately
- Only panel-mounted accessories will fit into 4 box compartment boxes

### Part Number Guide

Part Number	Description
CAV/3/60	CAVITY 3C 60MM DEEP SERV. BOX
CAV/3/65	CAVITY 3C 65MM DEEP SERV. BOX
CAV/3/75	CAVITY 3C 75MM DEEP SERV. BOX
CAV/3/90	CAVITY 3C 90MM DEEP SERV. BOX
CAV/4/60	CAVITY 4C 60MM DEEP SERV. BOX
CAV/4/65	CAVITY 4C 65MM DEEP SERV. BOX
CAV/4/75	CAVITY 4C 75MM DEEP SERV. BOX
CAV/4/90	CAVITY 4C 90MM DEEP SERV. BOX
SCD/3/60	SCREED 3C 60MM DEEP SERV. BOX
SCD/3/65	SCREED 3C 65MM DEEP SERV. BOX
SCD/3/75	SCREED 3C 75MM DEEP SERV. BOX
SCD/3/90	SCREED 3C 90MM DEEP SERV. BOX
SCD/4/60	SCREED 4C 60MM DEEP SERV. BOX
SCD/4/65	SCREED 4C 65MM DEEP SERV. BOX
SCD/4/75	SCREED 4C 75MM DEEP SERV. BOX
SCD/4/90	SCREED 4C 90MM DEEP SERV. BOX

TM

# Service Box Plates

## 3 Compartment Service Box Plates

### 3 Compartment Box (Raised Floor)

- Service Box Plates are supplied with 2 x M3.5X6.5 Pozi-Pan Self Tapper BZP screws
- Supplied in RAL7035 Semi-Gloss as standard (Light Grey)



Panel Mounted Twin Cutout  
**1TS/CT/3C** (plate only)  
**1TS/CT/SKT/3C** (with socket)




Wandsworth Panel Mounted Twin Cutout 60mm  
**1TS/WW/3C** (plate only)  
**1TS/WW/SKT/3C** (with socket)  
\*Shallow box only



6 Way RJ45  
**6RJ45/3C** (37mm x 22mm)



4 RJ45 Cutouts  
**4RJ45/3C** (37mm x 22mm)

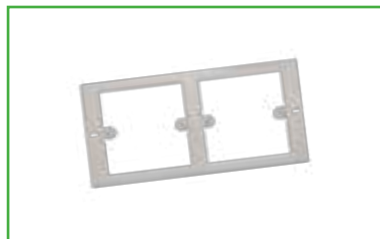


Dual Single Socket Cutouts  
**2SS/3C** (data only)



4 RJ45 Cutouts  
**4RJ45/3C/EU** (25mm x 50mm)



Single Socket Cutout  
**1SS/3C** (data only)

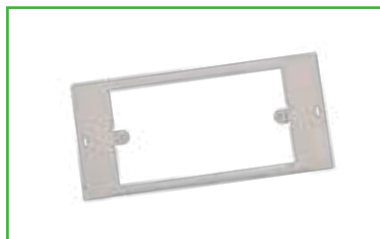

Twin Socket Cutout  
**1TS/SM/3C** (plate only)



3 Compartment Blank Plate  
**BL/3C** (37mm x 22mm)

# Service Outlet Boxes

## 4 Compartment Box Plates




Panel Mounted Twin Cutout  
**1TS/CT/4C** (plate only)  
**1TS/CT/SKT/4C** (with socket)



Wandsworth Panel Mounted Twin  
Cutout 60mm  
**1TS/WW/4C** (plate only)  
**1TS/WW/SKT/4C** (with socket)  
\*Shallow box only




Blank Plate  
**BL/4C**

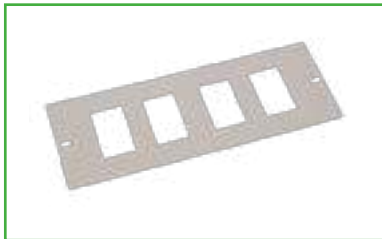

4 off RJ45 Cutouts  
**4RJ45/4C**  
(cutout size 37mm x 22mm)



6 Way RJ45  
**6RJ45/4C**  
(cutout size 37mm x 22mm)

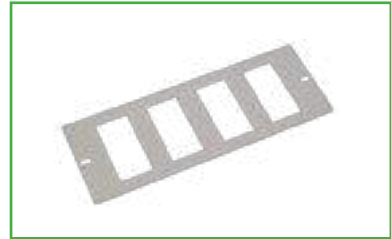

4 off RJ45 Cutouts  
**4RJ45/4C/EU**  
(cutout size 25mm x 50mm)

TM

## Lighting Trunking – Galvanised

- Lighting trunking 50 mm x 50 mm is available in 3, 4 or 5 metre lengths
- The trunking may be fixed directly to the ceiling or suspended by hanging brackets
- Lids in 2 metre lengths can be supplied in galvanised or white PVC material
- Long connectors fixed internally between trunking lengths provide strengths & rigidity through the trunking run



Galvanised Lid

FLT/LID/G



50mm x 50mm

5 metre length

FLT22/5

4 metre length

FLT22/4


3 metre length

FLT22/3




Internal Bend

FLT/ISB




External Bend

FLT/ESB



Flat Bend

FLT/ESB




Internal Tee

FLT/IST



External Tee

FLT/EST



Flat Tee

FLT/FST

TM



# Lighting Trunking

Lighting Trunking – Galvanised



Crossover

FLT/CO



Connector

FLT/CON



Hanger (10mm Hole)

FLT/HC



45° Flat Bend

FLT/FB



45° Internal Bend

FLT/IB




45° External Bend

FLT/EB



End Cap

FLT/EC



Flange

FLT/FE



Cable Retainer

FLT/CS



Girder Clamp

FLT/GC




Fitting Suspensions

FLT/SK

## 3 Compartment Trunking

175 x 60mm

Atkore Marco Elite 3 trunking system offers an innovative design solution for the growing data-cabling market. At 175 x 60mm, the symmetrical curved design allows for the installation of power and high-density structured cabling systems including CAT5E, CAT6, CAT6A and CAT7 solutions.

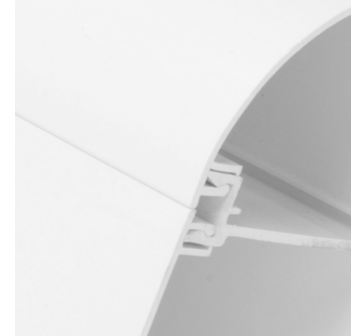

Elite Range

## Key Features



### 3 Compartment

Elite 3 has been designed to comply with the latest structured cabling solutions on the market. Top and bottom compartments complement a larger centre compartment which can facilitate socket mounting accessories.



### Hygieia Protection

Elite 3 is available with Atkore Marco's Hygieia anti-microbial protection. Defending against 99.9% of harmful bacteria.



### 175 x 60mm Profile

Elite 3's profile allows for ample data and power cabling to be supplied. The curved design prevents dust trapping and provides a more aesthetically pleasing finish.



### DDA & Part M

Elite 3 is also able to comply to both DDA and Part M specifications, using either contrasting centre lids or coloured socket plates.



### CAT6, CAT6A & CAT7

Elite 3 meets the latest structured cabling solutions by offering a 50mm bend radius on all Elite accessories.



### BIM Download

Elite 3 BIM objects are available as part of the uPVC BIM download on the website.

Elite systems meet and exceed the requirements for BS 6701:2016+A1:2017, BS 4678 Pt 4, BS 7671, ISO 11901-1:2003 and Cenelec (EN 50173 Part 1 / 2, EN 50174-2) standards.

## Elite 3

### 3 Compartment Trunking

#### Elite 3

Elite 3 is designed to suit all types of installation environments. It is made from the highest quality uPVC compound, providing its signature pure white finish. At 175 x 60mm Elite 3 is able to accommodate CAT6 and CAT6A cables, making it a perfect fit for any modern installation.

Elite 3 is available in three colours, pure white, light grey and charcoal.

CODE	DESCRIPTION	LENGTH	PACK QTY
ME3	Elite 3 - Pure White	3m	2 x 3m
ME3LG	Elite 3 - Light Grey	3m	2 x 3m
ME3CH	Elite 3 - Charcoal	3m	2 x 3m




#### Elite 3 - DDA

Elite trunking is also able to accommodate DDA Part M requirements, via the use of a light grey or charcoal centre lid.



CODE	DESCRIPTION	LENGTH	PACK QTY
ME3LGL	Elite 3 - Pure White with Light Grey Lid	3m	2 x 3m
ME3CHL	Elite 3 - Pure White with Charcoal Lid	3m	2 x 3m

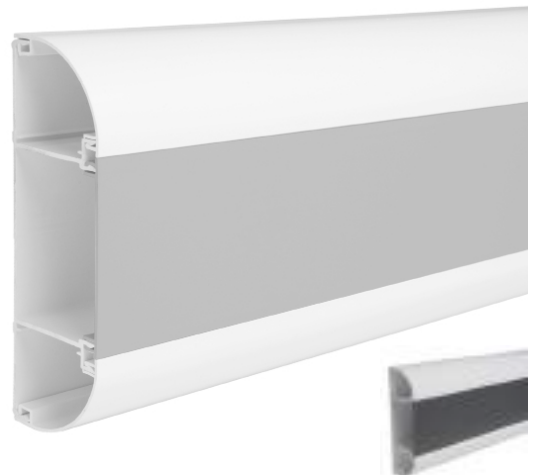


#### Elite 3 - Hygieia

Elite 3 is available with Hygieia, offering anti-microbial protection against 99.9% of harmful bacteria. The anti-microbial compound forms an integral part of the trunking, meaning there is no loss of performance if the trunking becomes scratched or damaged. All of Elite's additional components are also available with anti-microbial protection.

Elite Hygieia is supplied with a protective blue film for extra protection during transit and installation.

CODE	DESCRIPTION	LENGTH	PACK QTY
ME3AM	Elite 3 - Pure White with Anti-Microbial	3m	2 x 3m
ME3AMLGL	Elite 3 - Light Grey Lid with Anti-Microbial	3m	2 x 3m
ME3AMCHL	Elite 3 - Charcoal Lid Anti-Microbial	3m	2 x 3m

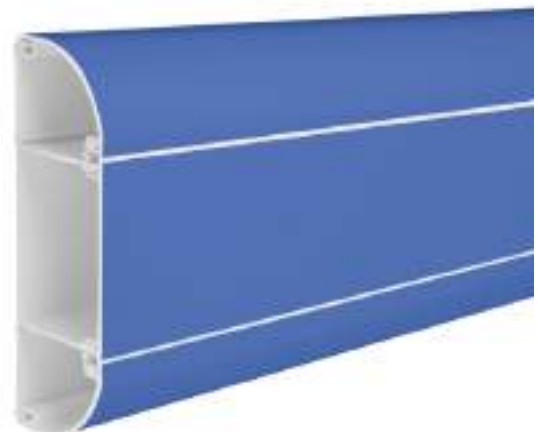

Minimum order quantities apply to Charcoal Anti-Microbial

Illustration purposes only, protective blue film to be removed during installation.

## Elite 3 Accessories

### 3 Compartment Trunking

#### Flat Angle



Product Information	
Code	ME3F
Dimensions (mm)	254 x 254 x 62
Pack Qty	1

Available Colours ☐ ☐ ☐

Two-piece moulded flat angle with built in data guides retaining CAT6, CAT6A and CAT7 compliance. Flat overlaps trunking lids, with no needs for joint covers.

#### Flat Tee



Product Information	
Code	ME3T
Dimensions (mm)	326 x 253 x 62
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded flat tee with two sets of data guides to maintain 50mm bend radius for CAT6, CAT6A and CAT7 compliance. Tee overlaps trunking lids, with no need for joint covers.

#### Internal Angle



Product Information	
Code	ME3I
Dimensions (mm)	179.5 x 134 x 134*
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded internal angle with an adjustable design allowing for a variance of +/- 5° accommodating walls without true 90° bend. Angles have 50mm bend radius to comply with CAT6, CAT6A & CAT7.

\* Indicates Height and Width before movement

#### External Angle



Product Information	
Code	ME3E
Dimensions (mm)	179.5 x 104.5 x 104.5*
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded external angle with an adjustable design, allowing for a variance of +/- 5° accommodating walls without a true 90° bend. Angles have 50mm bend radius to comply with CAT6, CAT6A & CAT7.

\* Indicates Height and Width before movement

#### Internal Angle - Fixed 45°



Product Information	
Code	ME3I-135
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated fixed internal angle for Elite 3, designed for use on walls with a 45° in-facing bend. Supplied as individual units and requires 2 joint covers.

Additional joint covers (ME3J x 2) required when fitting.

#### External Angle - Fixed 45°



Product Information	
Code	ME3E-135
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated fixed external angle for Elite 3, designed for use on walls with a 45° out-facing bend. Supplied as individual units and requires 2 joint covers.

Additional joint covers (ME3J x 2) required when fitting.

Available Colours:

☐ Standard White ☐ Light Grey. Add LG to product code ☐ Charcoal. Add CH to product code

## Elite 3 Accessories

### 3 Compartment Trunking

#### End Covers



Product Information	
Code	ME3C
Dimensions (mm)	176.5 x 62 x 12
Pack Qty	2

Available Colours ☐ ☐ ☐

Curved end covers matching trunking profile, supplied in packs of two.

#### Joint Covers



Product Information	
Code	ME3J
Width (mm)	179.5 x 62 x 33
Pack Qty	5

Available Colours ☐ ☐ ☐

Joint covers with easy clip-in mechanism for faster fitting. Supplied in packs of five.

#### External Angle Screening Divider



Product Information	
Code	ME3SDE
Pack Qty	1

Clip in screening divider for Elite 3 external angles. Meets BS EN 50174-2 for power and data separation.

#### Steel Strip Screening Divider



Product Information	
Code	ME3SD
Pack Qty	4 x 1.5m

Slide-in screening divider for Elite 3. Meets BS EN 50174-2 for power and data separation. Divider has same prepunched knockouts as internal walls. Supplied in 1.5m.

#### Take-Off Adapter



Product Information	
Code	ME3TOA
Dimensions (mm)	92 x 62 x 61
Pack Qty	1

Available Colours ☐ ☐ ☐

Take off adaptor for Atkore Marco Mini trunking. Supports 16 x 16mm, 16 x 25mm, and 25 x 38mm sizes. Can also accept 20 & 25mm PVC conduit.

## Elite 3 Accessory Boxes

### 1-Gang Socket Boxes



Product Information	35mm 1-Gang Socket Box	35mm 1-Gang Socket Box, 4 Pillar	25mm 1-Gang Socket Box	25mm 1-Gang Socket Box, 4 Pillar	50mm 1-Gang Socket Box
Code	MTSB1	MTSB1-4	MTSB1-25	MTSB1-25-4	MTSB1-50
Depth (mm)	35	35	25	25	50
No. of Pillars	2	4	2	4	2
Pack Qty	10	10	10	10	10

### 2-Gang Socket Boxes



Product Information	35mm 2-Gang Socket Box	25mm 2-Gang Socket Box	50mm 2-Gang Socket Box
Code	MTSB2	MTSB2-25	MTSB2-50
Depth (mm)	35	25	50
No. of Pillars	2	2	2
Pack Qty	10	10	10

### 1 & 2-Gang Socket Frames



Product Information	1-gang socket mounting frame	2-gang socket mounting frame
Code	MTSB1-F	MTSB2-F
Depth (mm)	N/A	N/A
No. of Pillars	4	2
Pack Qty	10	10

# Elite 3 Universal Accessories

3 Compartment Trunking

Elite Range

## Accessory Spacer



Product Information	
Code	MTLS
Dimensions (mm)	87 x 60
Pack Qty	10

Available Colours ☐ ☐ ☐

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

## RCD/MCB DIN Rail Housing Kit




Product Information	
Code	ME3RCDH
Pack Qty	1

Includes: Hinged Cover, Mounting Frame and Mounting Bracket. Locking mechanism also available.

### 3 Compartment Trunking

Manufactured from the same high quality materials as Elite 3, Elite Compact offers all the same benefits and features of Elite 3, condensed into a smaller 145 x 50mm profile. Elite Compact is designed to carry large numbers of power and data cables, with a smaller profile which can be installed in locations where space is limited or when a smaller form-factor is desired. Elite Compact is able to support structured cabling systems including CAT5E, CAT6, CAT6A and CAT7 solutions.

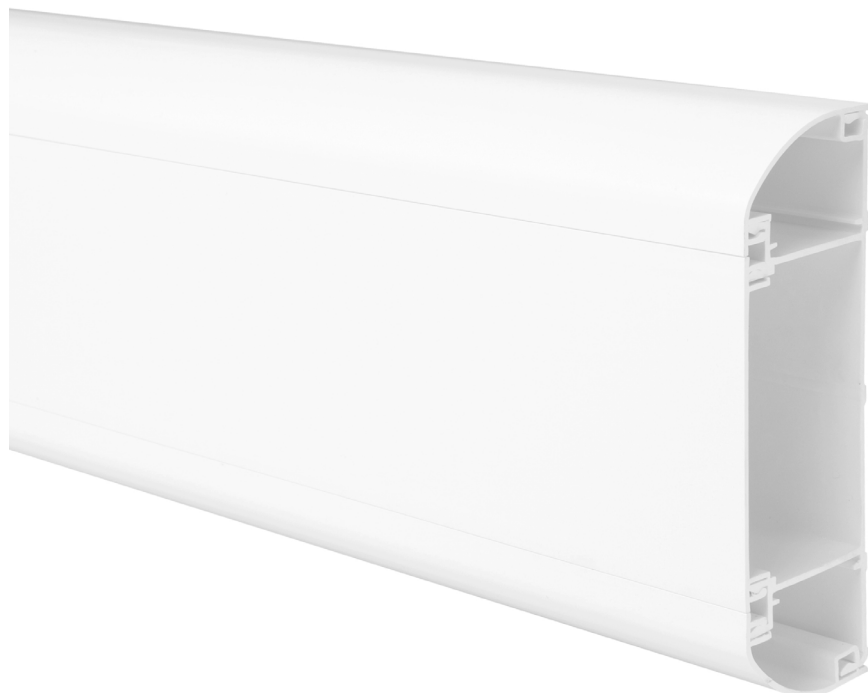

## Key Features



### 3 Compartment

Elite Compact is a 3 compartment system, designed to provide the maximum in carrying capacity, whilst retaining a smaller aesthetic.



### Hygieia Protection

Elite Compact is available with Hygieia anti-microbial protection, keeping the spread of bacteria in all environments to a minimum.



### 145 x 50mm Profile

Despite its small size, Elite Compact's design allows it to house a large number of cables in both its top and bottom compartments, as well as having a full sized centre compartment to house accessories.



### DDA & Part M

Elite Compact is available with DDA and Part M specifications, including contrasting centre lid and a range of coloured accessory plates.



### CAT6 & CAT7 Compliance

Elite Compact meets the latest structured cabling solutions by offering required bend radius on all fittings and accessories.



### BIM Download

Elite Compact BIM objects are available as part of the uPVC BIM download on the website.

Elite systems meet and exceed the requirements for BS 6701:2016+A1:2017, BS 4678 Pt 4, BS 7671, ISO 11901-1:2003 and Cenelec (EN 50173 Part 1 / 2, EN 50174-2) standards.



## Elite Compact

### 3 Compartment Trunking

Elite Range

The smallest in Elite range, Compact offers all the benefits of larger Elite products, packed into its 145 x 50mm profile. Manufactured from the same high quality uPVC compound, Elite Compact has the same signature pure white finish as other trunking.

Elite Compact's design makes it perfect for housing structured cabling and comes CAT6 & CAT6A compliant as standard. Elite Compact is available in three colours, Pure White, Light Grey and Charcoal.

CODE	DESCRIPTION	LENGTH	PACK QTY
MEC3	Elite Compact - Pure White	3M	2 x 3M
MEC3LG	Elite Compact - Light Grey	3M	2 x 3M
MEC3CH	Elite Compact - Charcoal	3M	2 x 3M

#### Elite Compact - DDA

Elite Compact trunking is also able to accommodate DDA requirements, using a light grey or charcoal centre lid.



CODE	DESCRIPTION	LENGTH	PACK QTY
MEC3LGL	Elite Compact - Pure White with Light Grey Lid	3m	2 x 3m
MEC3CHL	Elite Compact - Pure White with Charcoal Lid	3m	2 x 3m

#### Elite Compact - Hygieia

Elite Compact is available with Hygieia protection, defending against 99.9% of harmful bacteria. The anti-microbial compound forms an integral part of the trunking, meaning there is no loss of performance if the trunking becomes scratched or damaged.

All of Compact's additional components are also available with anti-microbial protection.

Atkore Marco's Hygieia trunking is supplied with a protective blue film for extra protection during transit and installation.

CODE	DESCRIPTION	LENGTH	PACK QTY
MEC3AM	Elite Compact - Pure White with Anti-Microbial	3m	2 x 3m
MEC3AMLGL	Elite Compact - Light Grey Lid with Anti-Microbial	3m	2 x 3m
MEC3AMCHL	Elite Compact - Charcoal Lid with Anti Microbial	3m	2 x 3m

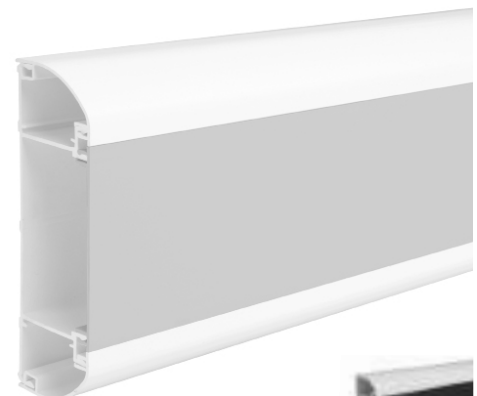


Illustration purposes only, protective blue film to be removed during installation.

Minimum order quantities apply to Charcoal Anti-Microbial,

## Elite Compact - Accessories

### 3 Compartment Trunking

#### Flat Angle



Product Information	
Code	MEC3F
Dimensions (mm)	224 x 224 x 52
Pack Qty	1

Available Colours ☐ ☐ ☐

Two-piece moulded flat angle for Elite Compact with built in data guides retaining CAT6, CAT6A and CAT7 compliance. Flat overlaps trunking lids, with no needs for joint covers.

#### Flat Tee



Product Information	
Code	MEC3T
Dimensions (mm)	293 x 222.5 x 52
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded flat tee for Elite Compact with two sets of data guides to maintain 50mm bend radius for CAT6, CAT6A and CAT7 compliance. Tee overlaps trunking lids, with no need for joint covers.

#### Internal Angle



Product Information	
Code	MEC3I
Dimensions (mm)	125 x 125 x 149.5*
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded internal angle with an adjustable design allowing for a variance of +/- 5° accommodating walls without true 90° bend. Angles have 50mm bend radius to comply with CAT6 and CAT7.

\* Indicates Height and Width before movement

#### External Angle



Product Information	
Code	MEC3E
Dimensions (mm)	92 x 92 x 150*
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded external angle with an adjustable design, allowing for a variance of +/- 5° accommodating walls without a true 90° bend. Angles have 50mm bend radius to comply with CAT6 and CAT.

\* Indicates Height and Width before movement

#### Internal Angle - Fixed 45°



Product Information	
Code	MEC3I-135
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated fixed internal angle for Elite Compact, designed for use on walls with a 45° in-facing bend. Supplied as individual units and requires 2 joint covers. Additional joint covers (MEC3J x 2) required when fitting.

#### External Angle - Fixed 45°



Product Information	
Code	MEC3E-135
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated fixed external angle for Elite Compact, designed for use on walls with a 45° out-facing bend. Supplied as individual units and requires 2 joint covers. Additional joint covers (MEC3J x 2) required when fitting.

## Elite Compact - Accessories

3 Compartment Trunking

### End Covers



Product Information	
Code	MEC3C
Dimensions (mm)	149.5 x 52 x 12
Pack Qty	2

Available Colours ☐ ☐ ☐

Curved end covers matching trunking profile, supplied in packs of two.

### Joint Covers



Product Information	
Code	MEC3J
Width (mm)	149.5 x 52 x 33
Pack Qty	5

Available Colours ☐ ☐ ☐

Joint covers with easy clip-in mechanism for faster fitting. Supplied in packs of five.

### External Angle Screening Divider



Product Information	
Code	MEC3SDE
Pack Qty	1

Clip in screening divider for Elite Compact external angles. Meets BS EN 50174-2 for power and data separation.

### Steel Strip Screening Divider



Product Information	
Code	MEC3SD
Pack Qty	4 x 1.5m

Slide-in screening divider for Elite compact. Meets BS EN 50174-2 for power and data separation. Divider has same prepunched knock outs as internal walls. Supplied in 1.5m.

### Take-Off Adapter



Product Information	
Code	MEC3TOA
Dimensions (mm)	92 x 52 x 46
Pack Qty	1

Available Colours ☐ ☐ ☐

Take off adaptor for Mini trunking. Supports 16 x 16mm, 16 x 25mm, and 25 x 38mm sizes. Can also accept 20 & 25mm PVC conduit.

Available Colours:

☐ Standard White ☐ Light Grey. Add LG to product code ☐ Charcoal. Add CH to product code

## 1-Gang Socket Boxes



Product Information	35mm 1-Gang Socket Box	35mm 1-Gang Socket Box, 4 Pillar	25mm 1-Gang Socket Box	25mm 1-Gang Socket Box, 4 Pillar
Code	MTSB1	MTSB1-4	MTSB1-25	MTSB1-25-4
Depth (mm)	35	35	25	25
No. of Pillars	2	4	2	4
Pack Qty	10	10	10	10

## 2-Gang Socket Boxes



Product Information	35mm 2-Gang Socket Box	25mm 2-Gang Socket Box
Code	MTSB2	MTSB2-25
Depth (mm)	35	25
No. of Pillars	2	2
Pack Qty	10	10

## 1 & 2-Gang Socket Frames



Product Information	1-gang socket mounting frame	2-gang socket mounting frame
Code	MTSB1-F	MTSB2-F
Depth (mm)	N/A	N/A
No. of Pillars	4	2
Pack Qty	10	10

# Universal Accessories

## 3 Compartment Trunking

### Accessory Spacer



Product Information	
Code	MTLS
Dimensions (mm)	87 x 60
Pack Qty	10

Available Colours ☐ ☐ ☐

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

### RCD/MCB DIN Rail Housing Kit



Product Information	
Code	MEC3RCDH
Pack Qty	1

Includes: Hinged Cover, Mounting Frame and Mounting Bracket. Locking mechanism also available.

With its 200 x 63mm profile, Elite 60 is the largest trunking available in the Elite range.

Able to accommodate a large amount of CAT5E and CAT6/CAT6A cables, Elite 60 has been designed from the ground up to serve as a perfect fit for installations which require a high capacity containment solution. Elite 60 can support structured cabling systems up to CAT7.



## Key Features



### 200 x 63mm Profile

The largest trunking in the Elite range, Elite 60 is able to carry more CAT6 cables than any other trunking. Designed for installations where there is a heavy reliance on power and data cabling.



### DDA & Part M

Elite 60 is able to become completely DDA compliant, using contrasting centre lid or coloured socket plates.



### 2 Compartment

2 Compartment as standard, Elite 60 can be sub-divided into a total of 4 compartments for complex wiring systems.



### BIM Download

Elite 60 BIM objects are available as part of the uPVC BIM download on the website.



### CAT6, CAT6A & CAT7

All of the Elite range have been designed to accommodate CAT6 & CAT7, none more-so than Elite 60, which has two large capacity compartments as well as a removable top lid.

Elite systems meet and exceed the requirements for BS 6701:2016+A1:2017, BS 4678 Pt 4, BS 7671, ISO 11901-1:2003 and Cenelec (EN 50173 Part 1 / 2, EN 50174-2) standards.

## Elite 60

### Data Trunking

#### Elite 60

Elite 60 is the largest capacity trunking in the Elite range, allowing for a greater number of cables to be installed.

Elite 60 comes with a unique top opening lid, allowing cables to be installed easily and speedily. Should additional cable segregation be required, further capacity can be achieved through the use of clip-in dividers, able to take the trunking up to 4 compartments if required.

CODE	DESCRIPTION	LENGTH	PACK QTY
MT60	Elite 60 - Pure White	3M	2 x 3M




#### Elite 60 - DDA

DDA compliance is attainable using Elite 60 in conjunction with contrasting centre lids or through the use of our coloured socket plates. Elite 60's high capacity and DDA compliance make it a perfect fit for schools or public buildings.



CODE	DESCRIPTION	LENGTH	PACK QTY
MT60LGL	Elite 60 - Pure White & Light Grey Lid	3m	2 x 3m
MT60CHL	Elite 60 - Pure White & Charcoal Lid	3m	2 x 3m



## Flat Angle - Up



Product Information	
Code	MT60FU
Dimensions (mm)	235 x 235 x 63
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated upward mitred flat angle provided with a minimum 50mm bend radius.

Additional joint covers (MT60J x 2) required when fitting.

## Flat Tee - Up



Product Information	
Code	MT60T
Dimensions (mm)	330 x 240 x 63
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated upward flat tee junction. Each is supplied with a minimum 50mm bend radius.

Additional joint covers (MT60J x 3) required when fitting.

## Flat Angle - Down



Product Information	
Code	MT60FD
Dimensions (mm)	235 x 235 x 63
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated downward mitred flat angle provided with a minimum 50mm bend radius.

Additional joint covers (MT60J x 2) required when fitting.

## Flat Tee - Down



Product Information	
Code	MT60TD
Dimensions (mm)	330 x 240 x 63
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated downward flat tee junction. Each is supplied with a minimum 50mm bend radius.

Additional joint covers (MT60J x 3) required when fitting.

## Internal Angle



Product Information	
Code	MT60I
Height (mm)	136 x 136 x 204
Pack Qty	1

Moulded internal angle for Elite 60, designed for use on walls with a 90° in-facing bend. Supplied as individual units.

Available Colours: (Lid Only)

☐ Standard White ☐ Light Grey. Add LG to product code ☐ Charcoal. Add CH to product code

Alternative colours only available on Flat Angles and Flat Tee Lids.

## External Angle



Product Information	
Code	MT60E
Height (mm)	88 x 88 x 204
Pack Qty	1

Moulded external angle for Elite 60, designed for use on walls with a 90° out-facing bend. Supplied as individual units.




## Elite 60 - Accessories

Data Trunking

### End Covers

Elite Range



Product Information	LEFT	RIGHT
Code	MT60CL	MT60CR
Height (mm)	2 04 x 67 x 12	
Pack Qty	2	

Moulded end covers, designed to match the profile of the trunking. Due to Elite 60's shape, end caps are supplied in left and right-handed variants.

### Joint Covers



Product Information	
Code	MT60J
Width (mm)	204 x 67 x 30
Pack Qty	5

Moulded joint covers with an easy clip in mechanism for faster installation. Supplied in packs of five.

### External Angle Screening Divider



Product Information	
Code	MT60SDE
Pack Qty	1

Elite clip-in screening divider for external angles. Meets BSEN50174-2 for power and data separation

### Steel Strip Screening Divider



Product Information	
Code	MT60SD
Pack Qty	4 x 1.5m

Slide-in screening divider for Elite 60. Supplied in 1.5m lengths.

## Elite 60 - Accessory Boxes

### 1-Gang Socket Boxes



Product Information	35mm 1-Gang Socket Box	35mm 1-Gang Socket Box, 4 Pillar	25mm 1-Gang Socket Box	25mm 1-Gang Socket Box, 4 Pillar	50mm 1-Gang Socket Box
Code	MTSB1	MTSB1-4	MTSB1-25	MTSB1-25-4	MTSB1-50
Depth (mm)	35	35	25	25	50
No. of Pillars	2	4	2	4	2
Pack Qty	10	10	10	10	10

### 2-Gang Socket Boxes



Product Information	35mm 2-Gang Socket Box	25mm 2-Gang Socket Box	50mm 2-Gang Socket Box
Code	MTSB2	MTSB2-25	MTSB2-50
Depth (mm)	35	25	50
No. of Pillars	2	2	2
Pack Qty	10	10	10

### 1 & 2-Gang Socket Frames



Product Information	1-gang socket mounting frame	2-gang socket mounting frame
Code	MTSB1-F	MTSB2-F
Depth (mm)	N/A	N/A
No. of Pillars	4	2
Pack Qty	10	10

## Elite 60 - Universal Accessories

Data Trunking

### RCD/MCB DIN Rail Housing Kit



Product Information	
Code	MT60RCDH
Pack Qty	1

Includes: Hinged Cover, Mounting Frame and Mounting Bracket. Locking mechanism also available.

### Accessory Spacer



Product Information	
Code	MTLS
Dimensions (mm)	87 x 60
Pack Qty	10

Available Colours ☐ ☐ ☐

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

### uPVC Universal Divider Strip



Product Information	
Code	MTD105
Pack Qty	16 x 1.5m

Slide in uPVC divider for trunking products. Supplied in 1.5m lengths.

Apollo trunking is the most versatile and adaptable trunking system in the range. Apollo is designed to suit any application, coming in three profiles, it is able to match the aesthetic requirements of any project. Apollo is supplied as a CAT5E compliant system as standard, and can be altered to meet CAT6 through the use of clip-in data guides.

### MTD3

Chamfered



### MTDQ3

Square



### MTS3

Skirting



## Key Features



### Multi-Profile

Apollo's 3 profiles make it the most adaptable trunking system, accommodating any installation environment.



### Hygieia Protection

Apollo 3 is available with Marco's Hygieia anti-microbial protection. Defending against 99.9% of harmful bacteria.



### 170 x 50mm Profile

Apollo's large profile, and three compartments are ideal for carrying a large number of cables, and its centre compartment can house multiple accessories.



### DDA & Part M

Apollo 3 is also able to comply with both DDA and Part M specifications, using either our contrasting centre lids or coloured socket plates.



### BIM Download

Apollo is available in Atkore Marco's BIM object pack, available on the website.

Apollo trunking systems conform to the following standards: BS4678 Part 4, BSEN50173 Part 1/2, BS EN 50174-2:2018, BS7671, BS 6701:2016+A1:2017, ISO IEC 11801

## Apollo

### 3 Compartment Trunking

Apollo trunking is available in three different profiles. Available in Dado, Skirting and Square profiles Apollo's interchangeable lids are designed to accommodate installation requirements whilst retaining an aesthetically pleasing design.

CODE	DESCRIPTION	LENGTH	PACK QTY
MTD3	Apollo 3 - Dado Profile - White	3m	2 x 3m
MTD3LG	Apollo 3 - Dado Profile - Light Grey	3m	2 x 3m
MTD3CH	Apollo 3 - Dado Profile - Charcoal	3m	2 x 3m
MTDQ3	Apollo 3 - Square Profile - White	3m	2 x 3m
MTDQ3LG	Apollo 3 - Square Profile - Light Grey	3m	2 x 3m
MTDQ3CH	Apollo 3 - Square Profile - Charcoal	3m	2 x 3m
MTS3	Apollo 3 - Skirting Profile - White	3m	2 x 3m
MTS3LG	Apollo 3 - Skirting Profile - Light Grey	3m	2 x 3m
MTS3CH	Apollo 3 - Skirting Profile - Charcoal	3m	2 x 3m



### Apollo 3 - DDA

Apollo trunking is also able to adhere to DDA compliance through the use of contrasting centre lids and coloured socket plates, allowing for easy differentiation between the trunking and socket outlets.

CODE	DESCRIPTION	LENGTH	PACK QTY
MTD3LGL	Apollo 3 - Dado Profile - White with Light Grey Lid	3m	2 x 3m
MTD3CHL	Apollo 3 - Dado Profile - White with Charcoal Lid	3m	2 x 3m
MTDQ3LGL	Apollo 3 - Square Profile - White with Light Grey Lid	3m	2 x 3m
MTDQ3CHL	Apollo 3 - Square Profile - White with Charcoal Lid	3m	2 x 3m
MTS3LGL	Apollo 3 - Skirting Profile - White with Light Grey Lid	3m	2 x 3m
MTS3CHL	Apollo 3 - Skirting Profile - White with Charcoal Lid	3m	2 x 3m



### Apollo 3 - Hygieia

Apollo 3 is available with Hygieia finish, offering anti-microbial protection against 99.9% of harmful bacteria. The anti-microbial compound forms an integral part of the trunking, meaning there is no loss of performance if the trunking becomes scratched or damaged. All of Apollo's additional components are also available with anti-microbial.

Hygieia trunking is supplied with a protective blue plastic film for extra protection during transit and installation.

CODE	DESCRIPTION	LENGTH	PACK QTY
MTD3AM	Apollo 3 - Dado Profile - Anti-Microbial Finish	3m	2 x 3m
MTDQ3AM	Apollo 3 - Square Profile - Anti-Microbial Finish	3m	2 x 3m
MTS3AM	Apollo 3 - Skirting Profile - Anti-Microbial Finish	3m	2 x 3m

Light Grey and Charcoal Lid options available. Minimum quantities apply.

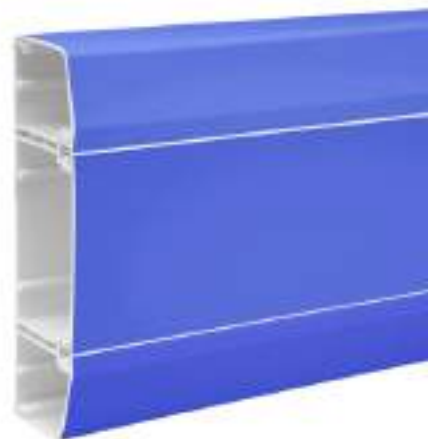


Illustration purposes only, protective blue film to be removed during installation.

## Accessories - Chamfer

### Chamfered Top & Bottom Lids

#### Flat Angle - Chamfer



Product Information	
Code	MTDF3
Dimensions (mm)	235 x 235 x 40
Pack Qty	1

Available Colours ☐ ☐ ☐

Chamfered profile Pre Fabricated mitred flat angle with chamfered top and bottom lids. Flat angle can be installed in either direction and is supplied as a single unit. Data guides can be added to meet CAT6. Additional joint covers (MTDJ3 x 2) required when fitting.

#### Flat Tee - Chamfer



Product Information	
Code	MTDT3
Dimensions (mm)	300 x 240 x 50
Pack Qty	1

Available Colours ☐ ☐ ☐

Chamfered profile Pre Fabricated mitred flat tee with chamfered top and bottom lids. Tee can be installed in either direction and top and bottom lids complement the profile of the trunking. Data guides can be added to meet CAT6. Additional joint covers (MTDJ3 x 3) required when fitting.

#### Internal Angle - Chamfer



Product Information	
Code	MTDI3
Dimensions (mm)	175 x 77 x 77
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit chamfered profile internal angle. Clips over trunking. Varying degree angles also available.

#### External Angle - Chamfer



Product Information	
Code	MTDE3
Dimensions (mm)	175 x 74 x 74
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit chamfered profile external angle. Clips over trunking. Varying degree angles also available.

#### End Cover - Chamfer



Product Information	
Code	MTDC3
Dimensions (mm)	175 x 51.5 x 12
Pack Qty	2

Available Colours ☐ ☐ ☐

Moulded end caps, supplied in pairs matching trunking profile.

#### Joint Cover - Chamfer



Product Information	
Code	MTDJ3
Width (mm)	175 x 51.5 x 33
Pack Qty	5

Available Colours ☐ ☐ ☐

Moulded joint covers with an easy clip-in mechanism for faster installation. Supplied in packs of five.

Available Colours:

☐ Standard White ☐ Light Grey. Add LG to product code  
Light Grey Lid. Add LGL to product code

☐ Charcoal. Add CH to product code  
Charcoal Lid. Add CHL to product code

## Accessories - Square

### Square Top & Bottom Lids

#### Flat Angle - Square




Product Information	
Code	MTDQF3
Dimensions (mm)	235 x 235 x 50
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated mitred joint flat angles with square top and bottom lids. Flat angle can be installed in either direction and is supplied as a single unit. Data guides can be added to meet CAT6. Additional joint covers (MTDQJ3 x 2) required when fitting.

#### Flat Tee - Square



Product Information	
Code	MTDQT3
Dimensions (mm)	300 x 240 x 50
Pack Qty	1

Available Colours ☐ ☐ ☐

Pre Fabricated mitred joint flat tee with square top and bottom lids. Tee can be installed in either direction and top and bottom lids complement the flush finish of the trunking. Data guides can be added to meet CAT6. Additional joint covers (MTDQJ3 x 3) required when fitting.

#### Internal Angle - Square



Product Information	
Code	MTDQI3
Dimensions (mm)	175 x 77 x 77
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit internal angle cover. Clips over and sits above trunking. Varying degree angles also available.

#### External Angle - Square



Product Information	
Code	MTDQE3
Dimensions (mm)	175 x 77 x 77
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit external angle. Clips over and sits above trunking. Supplied as single units. Varying degree angles also available.

#### End Cover - Square



Product Information	
Code	MTDQC3
Dimensions (mm)	175 x 51.5 x 12
Pack Qty	2

Available Colours ☐ ☐ ☐

Moulded end caps, supplied in pairs matching trunking profile.

#### Joint Cover - Square



Product Information	
Code	MTDQJ3
Width (mm)	175 x 77 x 77
Pack Qty	5

Available Colours ☐ ☐ ☐

Moulded joint covers with an easy clip in mechanism for faster installation. Supplied in packs of five.

## Accessories - Skirting

### Skirting Top & Bottom Lids

#### Flat Angle - Skirting




Product Information		
	UP	DOWN
Code	MTSF3U	MTSF3D
Dimensions (mm)	235 x 235 x 50	
Pack Qty	1	

Available Colours ☐ ☐ ☐

Skirting profile Pre Fabricated mitred flat angles with chamfered top and square bottom lids. Up has chamfered lid on inside bend. Down has chamfered lid on outside bend. Data guides can be added to meet CAT6. Additional joint covers (MTSJ3 x 2) required when fitting.

#### Flat Tee - Skirting



Product Information	
Code	MTST3
Dimensions (mm)	300 x 240 x 50
Pack Qty	1

Available Colours ☐ ☐ ☐

Skirting profile Pre Fabricated mitred joint flat tee with chamfered top and square bottom lids. Tee can be installed in either direction and top and bottom lids complement the finish of the trunking. Data guides can be added to meet CAT6. Down option available on request. Additional joint covers (MTSJ3 x 3) required when fitting.

#### Internal Angle - Skirting



Product Information	
Code	MTSI3
Dimensions (mm)	175 x 77 x 77
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit skirting profile internal angle cover. Clips in and sits above trunking. Varying degree angles also available.

#### External Angle - Skirting




Product Information	
Code	MTSE3
Dimensions (mm)	175 x 74 x 74
Pack Qty	1

Available Colours ☐ ☐ ☐

Moulded single unit skirting profile external angle cover. Clips in over trunking. Supplied as single units. Varying degree angles also available.

#### End Cover - Skirting



MTSCL3 MTSR3

Product Information		
	LEFT	RIGHT
Code	MTSCL3	MTSCR3
Dimensions (mm)	175 x 51.5 x 12	
Pack Qty	2	2

Available Colours ☐ ☐ ☐

Moulded end caps, supplied in pairs matching trunking profile.

Available Colours:

☐ Standard White ☐ Light Grey. Add LG to product code  
Light Grey Lid. Add LGL to product code

#### Joint Cover - Skirting



Product Information	
Code	MTSJ3
Width (mm)	175 x 51.5 x 33
Pack Qty	5

Available Colours ☐ ☐ ☐

Moulded joint covers with an easy clip-in mechanism for faster installation. Supplied in packs of five.

☐ Charcoal. Add CH to product code  
Charcoal Lid. Add CHL to product code



## Apollo Univeral Accessories

### 3 Compartment Trunking

#### Cable Retainer



Product Information	
Code	MTCR
Pack Qty	20

Clip-in cable retainer. Designed to offer additional stability when holding cables in place through the trunking.

#### Accessory Spacer



Product Information	
Code	MTLS
Dimensions (mm)	87 x 60
Pack Qty	10

Available Colours ☐ ☐ ☐

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

#### RCD/MCB DIN Rail Housing Kit



Product Information	
Code	MTRCDH
Pack Qty	1

Includes: hinged cover, mounting frame and mounting bracket. Locking mechanism available.

#### Data Guides



Product Information	
Code	Add Suffix DG to angle codes
Pack Qty	1

Data guides, designed to enable CAT6 compliance throughout Apollo trunking accessories by maintaining necessary bend radius.

#### Steel Strip Screening Divider



Product Information	
Code	MTAS
Pack Qty	4 x 1.5M

Slide-in screening divider for Apollo. Meets BSEN50174-2 for power and data separation. Supplied in 1.5m lengths.

#### uPVC Universal Divider Strip



Product Information	
Code	MTD105
Pack Qty	16 x 1.5m

Slide in uPVC divider for trunking products. Supplied in 1.5m lengths.

Security fittings are available for many of our uPVC accessories.

## 1 - Gang Socket Boxes

## 3 Compartment Trunking



Product Information	35mm 1-Gang Socket Box	35mm 1-Gang Socket Box, 4 Pillar	25mm 1-Gang Socket Box	25mm 1-Gang Socket Box, 4 Pillar
Code	MTSB1	MTSB1-4	MTSB1-25	MTSB1-25-4
Depth (mm)	35	35	25	25
No. of Pillars	2	4	2	4
Pack Qty	10	10	10	10

## 2 - Gang Socket Boxes



Product Information	35mm 2-Gang Socket Box	25mm 2-Gang Socket Box
Code	MTSB2	MTSB2-25
Depth (mm)	35	25
No. of Pillars	2	2
Pack Qty	10	10

## 1 & 2 - Gang Socket Frames



Product Information	1-gang socket mounting frame	2-gang socket mounting frame
Code	MTSB1-F	MTSB2-F
Depth (mm)	N/A	N/A
No. of Pillars	4	2
Pack Qty	10	10

## Apollo 4 Compartment

257 x 50mm

4 Compartment Trunking

### Apollo 4

Apollo Trunking can also be modified to become a four compartment trunking, with a profile of 257 x 50mm, through the addition of the MT4KI extension kit.

Lengths are supplied as the standard MTD3 system, with the additional extension kit included. Apollo 4 compartment benefits from having two large centre compartments, both able to accommodate socket boxes and accessories.

#### MTD4

Chamfered



#### MTDQ4

Square



#### MTS4


Skirting



CODE	DESCRIPTION	LENGTH	PACK QTY
MTD4	Apollo 4 - Dado Profile - Pure White	3m	2 x 3m
MTD4LG	Apollo 4 - Dado Profile - Light Grey	3m	2 x 3m
MTD4CH	Apollo 4 - Dado Profile - Charcoal	3m	2 x 3m
MTDQ4	Apollo 4 - Square Profile - Pure White	3m	2 x 3m
MTDQ4LG	Apollo 4 - Square Profile - Light Grey	3m	2 x 3m
MTDQ4CH	Apollo 4 - Square Profile - Charcoal	3m	2 x 3m
MTS4	Apollo 4 - Skirting Profile - Pure White	3m	2 x 3m
MTS4LG	Apollo 4 - Skirting Profile - Light Grey	3m	2 x 3m
MTS4CH	Apollo 4 - Skirting Profile - Charcoal	3m	2 x 3m

### Apollo 4 - DDA

Apollo trunking is also able to adhere to DDA specification through the use of contrasting centre lids and coloured socket plates, allowing for easy differentiation between the trunking and its outlets.

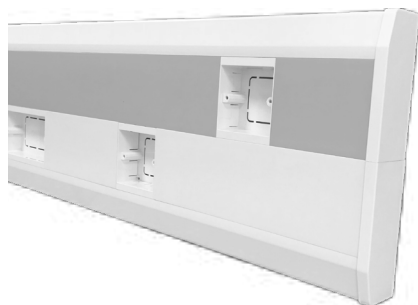

CODE	DESCRIPTION	LENGTH	PACK QTY
MTD4LGL	Apollo 4 - Dado Profile - White with Light Grey Lid	3m	2 x 3m
MTD4CHL	Apollo 4 - Dado Profile - White with Charcoal Lid	3m	2 x 3m
MTDQ4LGL	Apollo 4 - Square Profile - White with Light Grey Lid	3m	2 x 3m
MTDQ4CHL	Apollo 4 - Square Profile - White with Charcoal Lid	3m	2 x 3m
MTS4LGL	Apollo 4 - Skirting Profile - White with Light Grey Lid	3m	2 x 3m
MTS4CHL	Apollo 4 - Skirting Profile - White with Charcoal Lid	3m	2 x 3m

### Accessories

CODE	DESCRIPTION	PACK QTY
MTDF4**	Flat Angle - Dado	1
MTDQF4**	Flat Angle - Square	1
MTSF4U**	Flat Angle - Skirting - Up	1
MTSF4D**	Flat Angle - Skirting - Down	1
MTDT4**	Flat Tee - Dado	1
MTDQT4**	Flat Tee - Square	1
MTST4**	Flat Tee - Skirting	1
MTDC4*	End Cover - Dado	2
MTDQC4*	End Cover - Square	2
MTSCR4*	End Cover - Skirting - Right	2

\* Supplied as a 2-part fitting

CODE	DESCRIPTION	PACK QTY
MTSCL4*	End Cover - Skirting - Left	2
MTDI4*	Internal Angle - Dado	1
MTDQI4*	Internal Angle - Square	1
MTSI4*	Internal Angle- Skirting	1
MTDE4*	External Angle - Dado	1
MTDQE4*	External Angle - Square	1
MTSE4*	External Angle - Skirting	1
MTDJ4*	Joint Cover - Dado	5
MTDQJ4*	Joint Cover - Square	5
MTSJ4*	Joint Cover - Skirting	5

\*\* Joint covers required when fitting

Juno trunking is a single compartment uPVC dado system, which can be subdivided with a dividing strip for power, data and telecommunication cables. The position of the divider fixing points allow for two, three or four compartments to be made depending on installation needs.

Atkore Marco also offer Juno as individual pre-assembled units, ideal for student accommodation, and other installations with repeating specifications.



## Key Features



### 1, 2, 3 or 4 Compartment

Juno trunking is unique in its ability to be divided into a multiple compartment solution whilst keeping its compact profile.



### DDA & Part M

DDA compliance is attainable using contrasting centre lids or socket plates. Juno is available with light grey or charcoal variations to its standard pure white centre lid.



### 100 x 50mm Profile

Juno's smaller profile makes it perfect for installations with small distribution requirements, especially where space is limited.



### BIM Download

Juno forms part of the BIM downloads, an integral part of the Marco uPVC range, the entire Juno product family is available.



### Hygieia Protection

Juno is available with Hygieia protection. The anti-microbial element forms an integral part of the trunking meaning there is no loss of performance if the trunking is damaged.

Atkore Marco offer pre-assembled Juno units, ideal for student accommodation, as well as other repetitive installations!

## Juno


### Single Compartment Trunking

Juno is a single compartment trunking with the ability to be sub-divided up to three times, enabling it to form up to four compartments.

Juno is ideal for smaller installations where cable segregation is key. Its compact design makes it perfect for domestic and commercial use, and has seen use in projects with repeating units such as student accommodation and offices.

Full Charcoal and Light grey lengths are manufactured to order and minimum quantities apply.

CODE	DESCRIPTION	LENGTH	PACK QTY
MT105	Juno - Pure White	3m	2 x 3m
MT105CH	Juno - Charcoal	3m	2 x 3m

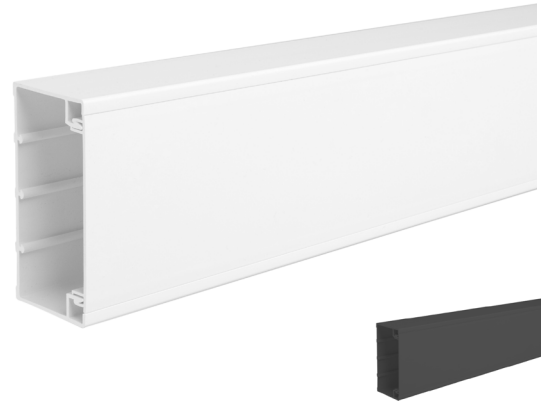


### Juno - DDA

Juno is also able to accommodate DDA compliance using contrasting centre lid. Juno can also accept DDA socket plates giving the required level of contrast around socket outlets.



CODE	DESCRIPTION	LENGTH	PACK QTY
MT105LGL	Juno - Pure White with Light Grey Lid	3m	2 x 3m
MT105CHL	Juno - Pure White with Charcoal Lid	3m	2 x 3m

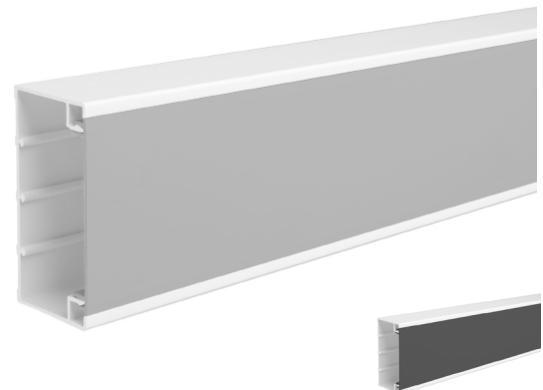

### Juno - Hygieia

Juno is also available with Hygieia protection. Anti-Microbial compound is added during the manufacturing process, forming an integral part of the trunking resulting in a consistent performance even if the trunking is scuffed or damaged.

Centre lid is supplied in a protective blue film for extra protection during installation.

Juno Hygieia is manufactured to order, minimum quantities apply.

CODE	DESCRIPTION	LENGTH	PACK QTY
MT105AM	Juno - Pure White with Anti-Microbial	3m	2 x 3m
MT105AMLGL	Juno - Light Grey with Anti-Microbial	3m	2 x 3m
MT105AMCHL	Juno - Charcoal with Anti-Microbial	3m	2 x 3m

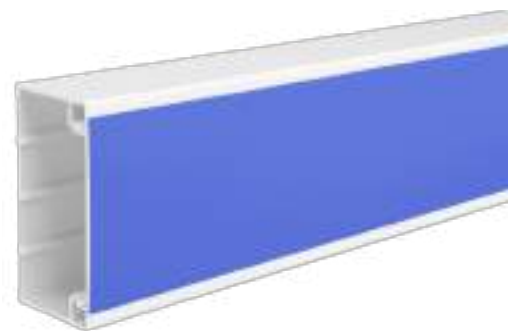


Illustration purposes only, protective blue film to be removed during installation.

Minimum order quantities apply to Charcoal Anti-Microbial.

## Juno - Accessories

### Single Compartment Trunking

#### Flat Angle



Product Information	
Code	MTF105
Pack Qty	1

Available Colours ☐ ☒

Moulded 90 degree flat angle bend for Juno trunking. Supplied as single units.

#### Flat Tee



Product Information	
Code	MTT105
Pack Qty	1

Available Colours ☐ ☒

Moulded flat tee for Juno trunking. Can be used to connect three lengths in any direction. Supplied as single units.

#### Internal Angle



Product Information	
Code	MTI105
Pack Qty	1

Available Colours ☐ ☒

Moulded single unit internal angle for Juno trunking. Connects two lengths creating a 90 degree bend. Supplied as single units.

#### External Angle



Product Information	
Code	MTE105
Pack Qty	1

Available Colours ☐ ☒

Moulded single unit external angle cover. Clips in and sits above trunking. Supplied as single units.

#### End Cover



Product Information	
Code	MTC105
Pack Qty	2

Available Colours ☐ ☒

Moulded end caps, supplied in pairs matching trunking profile.

#### Joint Cover



Product Information	
Code	MTJ105
Pack Qty	5

Available Colours ☐ ☒

Moulded joint covers with an easy clip in mechanism for faster installation. Supplied in packs of five.

Available Colours: ☐ Standard White ☒ Charcoal. Add CH to product code

## Juno - Accessories

### Single Compartment Trunking

#### uPVC Universal Divider Strip



Product Information	
Code	MTD105
Pack Qty	16 x 1.5m

Available Colours ☐ ☐ ☐

Slide in uPVC divider for trunking products. Supplied in 1.5m lengths.

#### Accessory Spacer



Product Information	
Code	MTLS
Dimensions (mm)	87 x 60
Pack Qty	10

Available Colours ☐ ☐ ☐

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

### Juno Accessory Boxes

#### 1 - Gang Socket Boxes



Product Information	35mm 1-Gang Socket Box	35mm 1-Gang Socket Box, 4 Pillar	25mm 1-Gang Socket Box	25mm 1-Gang Socket Box, 4 Pillar
Code	MTSB1	MTSB1-4	MTSB1-25	MTSB1-25-4
Depth (mm)	35	35	25	25
No. of Pillars	2	4	2	4
Pack Qty	10	10	10	10

#### 2 - Gang Socket Boxes




Product Information	35mm 2-Gang Socket Box	25mm 2-Gang Socket Box
Code	MTSB2	MTSB2-25
Depth (mm)	35	25
No. of Pillars	2	2
Pack Qty	10	10

MTSB1-F & MTSB2-F Socket mounting frames also available

Maxi trunking range is the perfect solution for a number of cable management project installations, including domestic and commercial installs. Atkore Marco's Maxi trunking is supplied in three standard sizes, 50mm, 75mm & 100mm, and are all available with a range of accessories and fittings.

Supplied with a unique **secure-lock lid**, Maxi trunking is able to offer a tamper proof solution, keeping cables protected in all environments. Maxi Trunking is supplied in 3 metre lengths as standard.

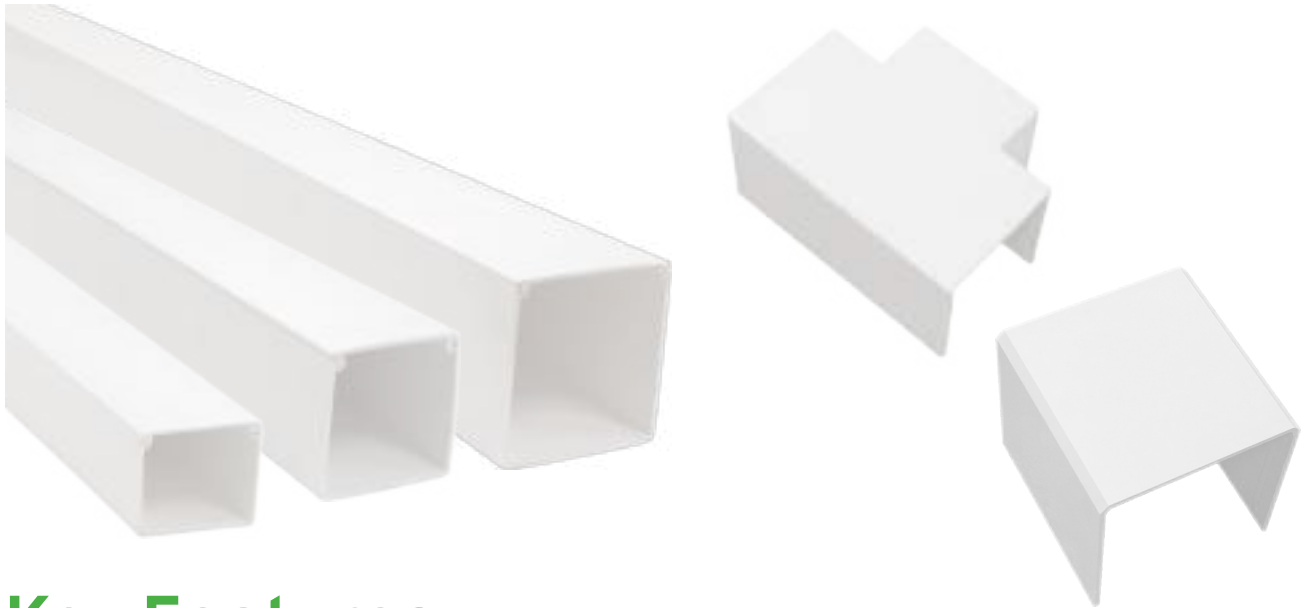

## Key Features



### 3 Sizes Available

Maxi trunking is available in three profiles, with sizes available to suit any project installation.



### Full Range of Fittings

Maxi trunking is available with a full range of supporting accessories and fittings, including moulded and fabricated accessories.



### Secure-Lock Lid

Maxi's secure-lock lid provides a robust solution which ensures that both the trunking exterior aesthetics are preserved, and interior cables are protected from tapering.

### Maxi Trunking

Maxi Trunking is available in three sizes, able to suit any installation. Maxi trunking is supplied in 3 metre lengths, in a pure white finish.



Product Information			
Code	MMT50	MMT75	MMT100
Height (mm)	50	75	100
Width (mm)	50	75	100
Pack Qty	12 x 3m	12 x 3m	12 x 3m


Maxi trunking systems conform to the following standards: BS4678 Part 4, BS7671, BS 6701:2016+A1:2017, ANSI/TIA 568, ISO IEC 11801



## Maxi Trunking Accessories

### Single Compartment Trunking

#### Flat Angle



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	2	MMTF50
75 x 75	1	MMTF75
100 x 100	1	MMTF100

Flat angles for maxi trunking. Available in all sizes of Maxi trunking. Product shown is the MMT50 variant, 75 & 100 versions are fabricated.

#### Flat Tee



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	2	MMTT50
75 x 75	1	MMTT75
100 x 100	1	MMTT100

Flat tee for maxi trunking. Available in all sizes of Maxi trunking. Product shown is the MMT50 variant, 75 & 100 versions are fabricated.

#### Internal Angle



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	2	MMTI50
75 x 75	1	MMTI75
100 x 100	1	MMTI100

Internal angles for maxi trunking. Available in all sizes of Maxi trunking. Product shown is the MMT50 variant, 75 & 100 versions are fabricated.


#### External Angle



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	2	MMTE50
75 x 75	1	MMTE75
100 x 100	1	MMTE100

External angles for maxi trunking. Available in all sizes of Maxi trunking. Product shown is the MMT50 variant, 75 & 100 versions are fabricated.


#### End Cover



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	8	MMTC50
75 x 75	4	MMTC75
100 x 100	4	MMTC100

Moulded single unit end caps for Maxi trunking. Available in all three sizes. Product shown is the MMT50 variant.

#### Internal Joint Cover



Product Information		
Size (mm)	Pack Qty	Code
50 x 50	2	MMTJ50
75 x 75	2	MMTJ75
100 x 100	2	MMTJ100

Moulded single unit joint cover for Maxi trunking. Available in all sizes. Product shown is the MMT50 variant.

#### Socket Mounting Frame 100 x 100mm only



Product Information		
Description	Pack Qty	Code
1-Gang Frame	10	MMBF1
2-Gang Frame	10	MMBF2

Socket Mounting Frames for Maxi Trunking. 1 & 2 Gang options available. Frames only suitable for 100 x 100mm Trunking.

#### Socket Mounting Boxes 100 x 100mm only



Product Information		
Description	Pack Qty	Code
1-Gang Box	10	MMBX1
2-Gang Box	10	MMBX2

Socket Mounting Boxes for Maxi Trunking. 1 & 2 Gang options available. Boxes only suitable for 100 x 100mm Trunking.


# Mini Trunking

## Standard and Self-Adhesive Trunking System

Atkore Marco's uPVC mini trunking allows for both power and data cabling to be installed within commercial or domestic buildings, making the products ideal for new build and refurbishments.

As with its sister products, Mini trunking has been designed with a clean, pure white, modern aesthetic that incorporates a high impact resistant uPVC compound, giving the product a durable yet versatile finish.

Mini trunking is available with a **self-adhesive** back, for even faster and easier installation.

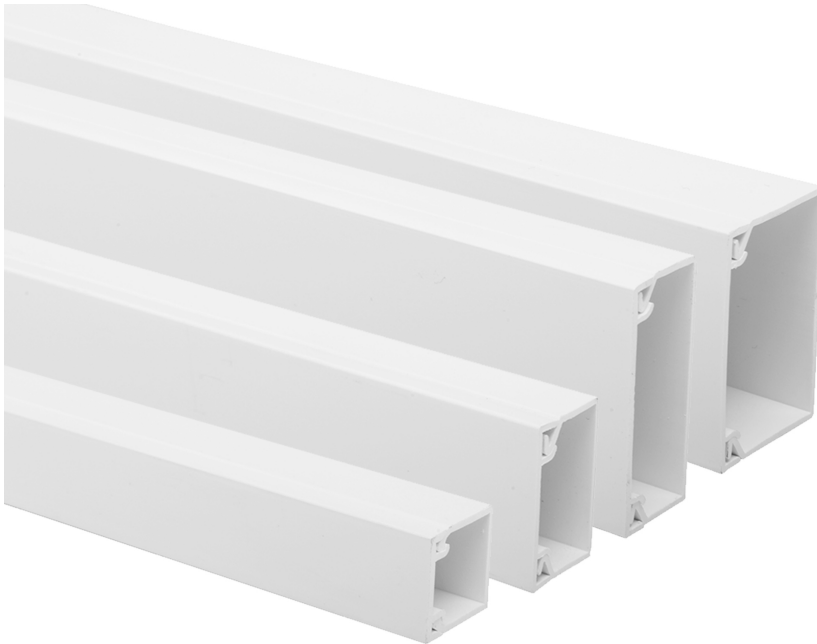

## Key Features



### 4 Sizes Available

Mini trunking is available in four sizes, making it suitable for a number of installation requirements.



### Full Range of Fittings

Each size of Atkore Marco's Mini trunking comes with a full range of fittings and accessories.



### Self Adhesive

Mini trunking is available with a self adhesive base, allowing for quick installation without compromising performance.



### BIM Download

Mini forms part of the Atkore Marco BIM downloads, an integral part of the Marco uPVC range, the entire Mini product family is available.



### Secure-Lock Lid

Mini's snap on lid allows for quick installation of power and data cabling, with secure fit to ensure cabling is kept inside.

Mini trunking systems conform to the following standards: BS4678 Part 4, BS7671, BS 6701:2016+A1:2017, ANSI/TIA 568B, ISO IEC 11801

## Mini Trunking

### Standard and Self-Adhesive Trunking System

#### Mini

Available in four sizes, Mini trunking is designed for electrical contractors and data installers allowing the lid to be removed and snapped on with ease, making the product ideal for moves, adds and changes (MAC) installations. The trunking is available with a full range of fittings and accessories.



Product Information				
Code	MM1	MM2	MM3	MM4
Width (mm)	16	25	38	38
Height (mm)	16	16	16	25
Pack Qty	90m	90m	45m	45m

#### Mini - Self Adhesive

Mini trunking is also available with a self-adhesive backing for quick installation.



Product Information				
Code	MMS1	MMS2	MMS3	MMS4
Width (mm)	16	25	38	38
Height (mm)	16	16	16	25
Pack Qty	90m	90m	45m	45m

## Accessories

### Standard and Self-Adhesive Trunking System

#### Flat Angle



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	60	MM1F
25 x 16	30	MM2F
38 x 16	25	MM3F
38 x 25	20	MM4F

Moulded single unit flat angle for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

#### Flat Tee



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	20	MM1T
25 x 16	30	MM2T
38 x 16	25	MM3T
38 x 25	20	MM4T

Moulded single unit flat tee for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

#### Internal Angle



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	50	MM1I
25 x 16	30	MM2I
38 x 16	25	MM3I
38 x 25	25	MM4I

Moulded single unit internal angle for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

#### External Angle



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	50	MM1E
25 x 16	30	MM2E
38 x 16	25	MM3E
38 x 25	25	MM4E

Moulded single unit external angle for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

#### End Cover



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	100	MM1C
25 x 16	100	MM2C
38 x 16	50	MM3C
38 x 25	50	MM4C

Moulded single unit end caps for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

#### Joint Cover



Product Information		
Size (mm)	Pack Qty	Code
16 x 16	40	MM1J
25 x 16	40	MM2J
38 x 16	25	MM3J
38 x 25	25	MM4J

Moulded single unit joint cover for mini trunking. Available in all four sizes of mini trunking. Product shown is the MM3 variant.

## Surface Boxes

Standard and Self-Adhesive Trunking System

### 32mm Square Edge 1 - Gang



Product Information	
Code	MSB32S1
Pack Qty	10

Includes 20mm conduit knock-out

### 32mm Square Edge 2 - Gang



Product Information	
Code	MSB32S2
Pack Qty	10

Includes 20mm conduit knock-out

### 32mm Round Edge 1 - Gang



Product Information	
Code	MSB32R1
Pack Qty	10

Includes 20mm conduit knock-out

### 32mm Round Edge 2 - Gang



Product Information	
Code	MSB32R2
Pack Qty	10

Includes 20mm conduit knock-out

### 44mm Round Edge 1 - Gang



Product Information	
Code	MSB44R1
Pack Qty	10

Includes 20mm conduit knock-out

### 44 mm Round Edge 2 - Gang



Product Information	
Code	MSB44R2
Pack Qty	10

Includes 20mm conduit knock-out

### 16 x 16 Surface Box Adapter



Product Information	
Code	MM1BA
Pack Qty	25

Includes 20mm conduit knock-out

### 25 x 16 Surface Box Adapter



Product Information	
Code	MM2BA
Pack Qty	25

Includes 20mm conduit knock-out

### Product

Antimicrobial uPVC

### Product Description

Atkore Marco's anti microbial compound utilises silver ion technology, to create a defence against 99.9% of harmful bacteria growth. The antimicrobial compound is incorporated into the uPVC, and is therefore an integral part of the trunking. This results in no degradation of performance, if the surface becomes scratched or damaged as there is protection throughout the system



Illustration purposes only, protective blue film to be removed during installation.

### Applicable Standards

ISO22196 (Measurement of antibacterial activity on plastic)

### Test Results

Quantitative Assessment of Activity – ISO22196:2011 – MRSA:

Concentration of starting inoculum: 3.20x10<sup>5</sup> CFU/mL

Sample Description	Number of Bacteria Recovered	Log Value	R = [log(B/C)]	% Survival
White PVC – untreated control	4.57x10 <sup>6</sup>	6.7	-	-
White Rigid PVC – Treated with Ag ion additive	<5.00x10 <sup>1</sup>	<1.7	>5.0	<0.1

Quantitative Assessment of Activity – ISO22196:2011 – Klebisella Pneumonia:

Concentration of starting inoculum: 2.36x10<sup>5</sup> CFU/mLmL

Sample Description	Number of Bacteria Recovered	Log Value	R = [log(B/C)]	% Survival
White PVC – untreated control	1.76x10 <sup>6</sup>	6.3	-	-
White Rigid PVC – Treated with Ag ion additive	<5.00x10 <sup>1</sup>	<1.7	<4.4	<0.1

### Test Report Ref

Report No. 2418041

## Socket Boxes

Specification for Atkore Marco's uPVC Socket Boxes

### Product

uPVC socket boxes

### Product Description

Socket boxes are designed to house a number of accessories and are available in a number of sizes.

The following table is a guide to be used when installing boxes in Atkore Marco products.

BOX	PRODUCT									
	MEC3	ME3	MT60	MTD3	MTS3	MTDQ3	MT105	MTP1	MTP1W	MTBT
MTSB1	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
MTSB2	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
MTSB1-25	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
MTSB2-25	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
MTSB1-50	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗
MTSB2-50	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗
MTSB1-F	✓	✓	✓	—	—	—	—	✗	✗	✗
MTSB2-F	✓	✓	✓	—	—	—	—	✗	✗	✗
MTPSB1	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓
MTPSB2	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
MTPSB1-25	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓
MTPSB2-25	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓

YES	NO	NO WINGS
✓	✗	—

# Aluminium Bench Trunking

Desktop Cable Management

Bench Trunking is manufactured from satin anodised aluminium and is fitted with a **white uPVC centre lid**. Available in both anodised aluminium and white powder-coated finishes, Atkore Marco's Bench Trunking systems are the perfect solution for environments where a robust solution is required.

Bench Trunking is available as **Individual Lengths**, **Back-to-Back** lengths and as a variety of **Pre-Assembled Units**, ideal for island workstations or modular builds.

A full range of moulded and fabricated fittings is available, and both 35 and 25mm back boxes can be installed at any point along the system. Optional 2-metre clip-in dividers (MTD1052) are available for segregation of power and data cabling.

## MTBT

Bench Trunking



## MTBT-BB

Back-to-Back Lengths



## MTBU

Bench Units



## Key Features



### DDA & Part M

Bench Trunking is also able to accommodate contrasting centre lids and socket plates, perfect for use in schools and labs.




### 100 x 100mm Profile

Designed for capacity, Bench Trunking has a large main compartment which can be split in to multiple compartments if required.



### Strong & Secure

The aluminium body used for Atkore Marco's Bench Trunking keeps the product sturdy and strong. Perfect for installations where heavy use is expected.



### 2 Colours Available

MTBT Bench Trunking system is available in Silver and White. Silver systems have a brushed aluminium finish, white systems have a powder coated finish.

Bench systems meet and exceed the requirements for BS 4678, BS 7671, BS 6701, ISO/IEC 1181 (ED2.0 Amd 2), and Cenlec (BS EN 50173 Part 1/2, BS EN 50174-2) standards.



## Aluminium Bench Trunking

Desktop Cable Management

### Bench Trunking

Available in both anodised aluminium and white powder coated finishes making it a suitable choice for a number of environments.

Bench Trunking is suitable for desk, bench or worktop applications, and can also be installed on the underside of shelving if required.

Bench Trunking can accept 25mm and 35mm socket boxes and has a range of complementing accessories to suit.

Bench Trunking is available with DDA compliant Light Grey or Charcoal Centre Lid.

CODE	DESCRIPTION	LENGTH	PACK QTY
MTBT	Bench Trunking - Aluminium Body, uPVC Lid	2m	1 x 2m
MTBTW	Bench Trunking - White Powder Coated Body, uPVC Lid	2m	1 x 2m



### Back To Back Bench Trunking

Bench Trunking is available in back-to-back lengths, perfect for long runs of facing tables in environments such as classrooms or labs. The back-to-back design allows for socket boxes to be installed on either side of the trunking without compromising stability or functionality.

Bench Trunking is available with DDA compliant Light Grey or Charcoal Centre Lid.

CODE	DESCRIPTION	LENGTH	PACK QTY
MTBT-BB	Back to Back - Aluminium Body, uPVC Lid	2m	1 x 2m
MTBT-BBW	Back to Back - White Powder Coated Body, uPVC Lid	2m	1 x 2m



### Accessories

Bench Trunking can accommodate the following accessory boxes and divider strip.



CODE	DESCRIPTION	PACK QTY
MTPSB1	Socket Mounting Box 35mm 1-gang	10
MTPSB1-25	Socket Mounting Box 25mm 1-gang	10
MTPSB2	Socket Mounting Box 35mm 2-gang	10
MTPSB2-25	Socket Mounting Box 25mm 2-gang	10
MTD1052	uPVC Divider	10 x 2m
MTBTRCDH	RCD/DIN Rail Housing Kit	1

### Internal Angle - Silver



Product Information	
Code	MTBTI
Dimensions (mm)	150 x 150 x 100
Pack Qty	1

Fabricated internal angle for Bench Trunking. Anodised aluminium body, white uPVC lid.  
Additional joint covers (MTBTJ) required when fitting.

### Internal Angle - White



Product Information	
Code	MTBTIW
Dimensions (mm)	150 x 150 x 100
Pack Qty	1

Fabricated internal angle for Bench Trunking. White powder coated aluminium body, white uPVC lid.  
Additional joint covers (MTBTJ) required when fitting.

### External Angle - Silver



Product Information	
Code	MTBTE
Dimensions (mm)	150 x 150 x 100
Pack Qty	1

Fabricated external angle for Bench Trunking. Anodised aluminium body, white uPVC lid.  
Additional joint covers (MTBJ) required when fitting.

### External Angle - White



Product Information	
Code	MTBTEW
Dimensions (mm)	150 x 150 x 100
Pack Qty	1

Fabricated external angle for Bench Trunking. White powder coated aluminium body, white uPVC lid.  
Additional joint covers (MTBJ) required when fitting.

### End Cover



Product Information	
Code	MTBC
Dimensions (mm)	102.5 x 102.5 x 11.5
Pack Qty	2

Moulded end caps, supplied in pairs matching trunking profile. uPVC End Covers are available in white, light grey and charcoal. Screws Included.

### Joint Cover



Product Information	
Code	MTBJ
Dimensions (mm)	102 x 102 x 25
Pack Qty	2

Moulded joint covers with an easy clip-in mechanism for faster installation. Joint covers must be fixed when joining lengths together. uPVC Joint Covers are available in white, light grey and charcoal.

## Bench Trunking Units

Desktop Cable Management Systems

### 1 - Gang Units



Product Information				
Code	MTBU1	MTBU1W	MTBU1-BB	MTBU1-BBW
Height (mm)	102.5	102.5	102.5	102.5
Length (mm)	129	129	129	129
Pack Qty	1	1	1	1

### 2 - Gang Units



Product Information				
Code	MTBU2	MTBU2W	MTBU2-BB	MTBU2-BBW
Height (mm)	102.5	102.5	102.5	102.5
Length (mm)	190	190	190	190
Pack Qty	1	1	1	1

### 3 - Gang Units



Product Information				
Code	MTBU3	MTBU3W	MTBU3-BB	MTBU3-BBW
Height (mm)	102.5	102.5	102.5	102.5
Length (mm)	291	291	291	291
Pack Qty	1	1	1	1

### 4 - Gang Units



Product Information				
Code	MTBU4	MTBU4W	MTBU4-BB	MTBU4-BBW
Height (mm)	102.5	102.5	102.5	102.5
Length (mm)	352	352	352	352
Pack Qty	1	1	1	1

Alternative configurations and sizes are available. Please contact our sales team for more information on the range.

## Pedestal Boxes

---

Pedestal Boxes are available with one or two gang apertures, single or double sided designed for mounting onto floors or benches. Ideal for use within schools, laboratories and workshops.

Robustly constructed from sheet steel, finished polyester powder coated white as standard. Other colours are available on requests.



Single Gang

E1010



Two Gang

E1012



Double Sided One Gang

E1016



Double Sided Two Gang

E1014

TM


### Bench Trunking

Flytec Bench Trunking is supplied in 2 metre lengths.


It comprises of a single compartment angled body with a powder-coated lid, with the colour white as standard. Each length and accessory is supplied with an internal connector.

This easy to install system offers a practical solution to provide services on benches and desks, commonly used in laboratories, workshops and schools/colleges.


**\*Supplied complete with Cover Straps.**

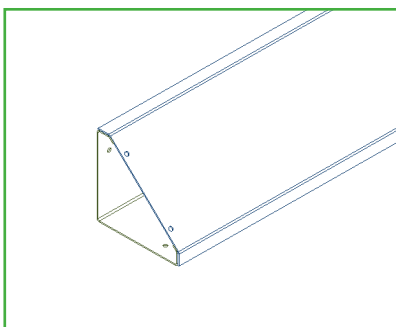


90mm x 90mm Bench Trunking **R35**

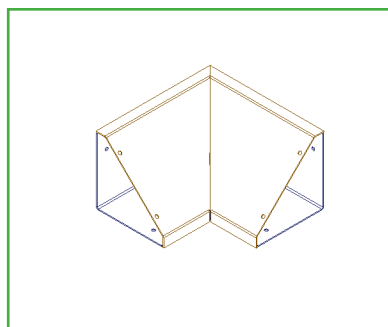


90° Internal Bend **R35/ISB**

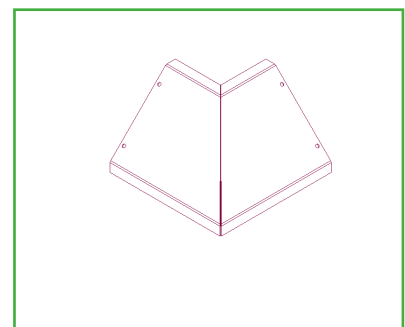


90° External Bend **R35/ESB**

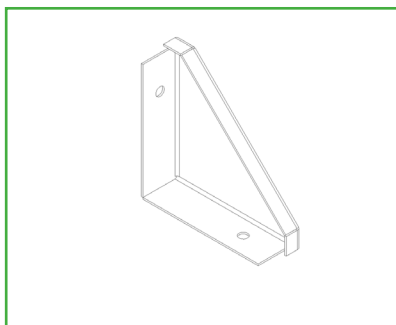

Stop End **R35/EC**

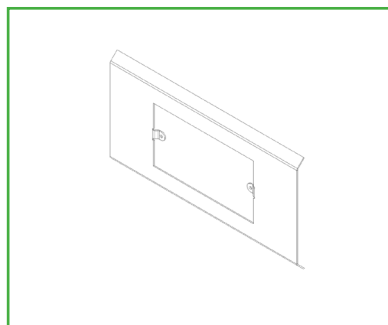

Twin Socket Lid **R35/TSO**

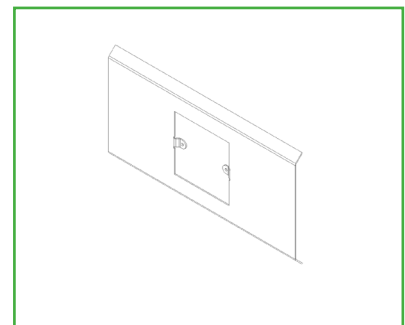

Single Socket Lid **R35/SSO**

Power Poles and posts are a perfect solution for projects requiring power and data distribution to island workstations or in the middle of open-plan spaces.

The systems benefit from strong aluminium profiles, designed to retain their rigidity in all installation environments.

Both the pole and post can achieve DDA compliance using contrasting centre lids.

Each system is ready to install out of the box and comes pre-packed with all necessary accessories and fittings.

Power Poles are available in Silver, and White finishes. All poles are supplied with white uPVC fittings.

## Key Features



### Strong & Secure

The system benefits from a strong aluminium core profile, keeping it rigid and secure in all types of installation.\*




### DDA & Part M

Poles & Posts are also able to accommodate contrasting centre lids, perfect for use in schools and labs.



### Ready, straight from the box

Each of the poles and posts are supplied with all necessary accessories straight out of the box. This includes 6 x 1-Gang 35mm accessory boxes and 6 metres of dividing strip.



### 2 Colours Available

Power Poles & Posts are available in Silver and White. Silver systems have a brushed aluminium finish, white systems have a powder coated finish.

\*Extra jacking mechanism required when cutting pole down to size.



## Power Poles & Posts

Aluminium Cable Management Solutions

### Silver & White Power Poles

Manufactured from aluminium for extra rigidity and strength, Power Poles are designed to carry power and data cabling from floors or ceilings.

Available in standard silver brushed aluminium or white powder coated finishes, Power Poles are able to accommodate any installation.

Power Poles are also available in 5 metres, and standard 3.6 metre poles can be extended using the 1 metre extension kit (MTP1E1/MTP1E1W).



CODE	DESCRIPTION	PACK QTY
MTP1	Power Pole, Silver Aluminium Body, uPVC Lids	1 x 3.6m
MTP1-5	Power Pole, Silver Aluminium Body, uPVC Lids, 5 Metre	1 x 5m
MTP1W	Power Pole, White Powder-Coated Body, uPVC Lids	1 x 3.6m
MTP1W-5	Power Pole, White Powder-Coated Body, uPVC Lids, 5 Metre	1 x 5m

Each pole is supplied with the following:

- 6 x 35mm 1-Gang Socket Boxes.
- 6 x Metres of Divider.
- 10 x MTLS Accessory Spacers.
- 1 x Jacking Mechanism.
- 1 x Floor Boot.
- 1 x Ceiling Shroud.

### Silver & White Power Posts

Power posts offer all the same cable management services as the Power Poles, in a smaller, desk height.

Posts are designed to carry cabling from underfloor systems to allow for power and data access in open plan spaces, specifically those which require under-desk access.

1 Metre power posts are also available.

CODE	DESCRIPTION	PACK QTY
MTPP1	Power Post, Silver Aluminium Body, uPVC Lids	1 x 650mm
MTPP1-1000	Power Post, Silver Aluminium Body, uPVC Lids, 1 Metre	1 x 1m
MTPP1W	Power Post, White Powder-Coated Body, uPVC Lids	1 x 650mm
MTPP1W-1000	Power Post, White Powder-Coated Body, uPVC Lids, 1 Metre	1 x 1m

Each post is supplied with the following:

- 6 x 35mm 1-Gang Socket Boxes.
- 6 x Metres of Divider.
- 10 x MTLS Accessory Spacers.
- 1 x Mounting Spline.
- 1 x Floor Boot.
- 1 x Pyramid Top.



## 35mm Accessory Box



Product Information	
Code	MTPSB1
Pack Qty	10

35mm Accessory box with 4 lugs.

## 25mm Accessory Box



Product Information	
Code	MTPSB1-25
Pack Qty	10

25mm Accessory box with 4 lugs.

## Ceiling Shroud



Product Information	
Code	MTPCS
Pack Qty	1

Replacement ceiling shroud for Power Poles. White uPVC.

## Floor Boot



Product Information	
Code	MTPFB
Pack Qty	1

Replacement floor boot, fits both Power Poles & Posts. White uPVC.

## Pyramid Top



Product Information	
Code	MTPPT
Pack Qty	1

Replacement pyramid top for the MTPP1 power posts. White uPVC

## 1 Metre Extension Kit



Product Information	
Code	MTP1E1/MTP1E1W
Pack Qty	1

1 metre extension kits for Power Poles. Available in silver and white.



# Power Pole Accessories

Aluminium Cable Management Solutions

## RCD/MCB DIN Rail Housing



Product Information	
Code	MTPRCDH
Pack Qty	1

Includes: hinged cover, mounting frame and mounting bracket. Locking mechanism available.

## Accessory Spacer



Product Information	
Code	MTLS
Pack Qty	10

Single unit accessory spacer. Fits on to centre compartment using the same quick snap-on system as centre lid.

## Divider Strip



Product Information	
Code	MTD105
Pack Qty	16 x 1.5m

Slide in uPVC divider for Power Poles & Posts. Supplied in 1.5m lengths.

# Steel Wire Cable Tray

## Steel Wire Cable Tray Systems


Atkore Marco is able to offer a comprehensive range of Steel Wire Cable Tray products, including a wide range of accessories and our new, pre-coupled, Quik-Clik Tray. For specialist projects, Atkore Marco is able to supply pre-cut lengths to suit installation requirements.

The entire Steel Wire Cable Tray range is available in the BIM download, found on the Atkore Marco website.

### Steel Wire Cable Tray

EZ HDG PC PG ZA

Made from direct drawn bright mild steel, and ideal for a variety of applications. Steel Wire Cable Tray is manufactured to the highest standards and utilises a 100 x 50mm grid design structure. Each length is produced in 3 metres, and is available in a large variety of sizes.

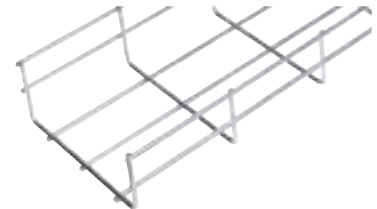

### Quik-Clik System


EZ

The latest innovation in the Steel Wire Cable Tray range is the new Quik-Clik system. Enabling two lengths to be coupled in under two seconds, the new system comes with two pre-installed joining couplers for faster on-site installation. Another benefit to the Quik-Clik tray is the ability to remove and re-attach its couplers, allowing for modifications and size change to be easily made to the tray, without losing any of its installation benefits.

### G-Shape Steel Wire Cable Tray

EZ

G-Shape tray has been designed as a containment solution for under-desk installations, or above suspended ceilings for service containments in small voids. The shape of the tray allows for both wall and ceiling mounting, and negates the need for suspension brackets, having the ability to be directly fixed to solid surfaces.



### Fast-Fix Accessories

PG EZ GT TB

Steel Wire Cable Tray range is further enhanced by a large range of accessories and fittings, all designed to allow for quick and convenient on-site installation. In-particular, Fast Fix line of accessories have been designed for quicker installation, with a drastically reduced need for additional components such as nut & bolt or the need for heavy electrical or mechanical tools.

PG Pre-Galvanised

HDG Hot-Dip Galvanised


GT Geomet

ZA Zinc Aluminium  
See page 9 for more information

EZ Electro Zinc

PC Powder Coated

TB Turned Brass

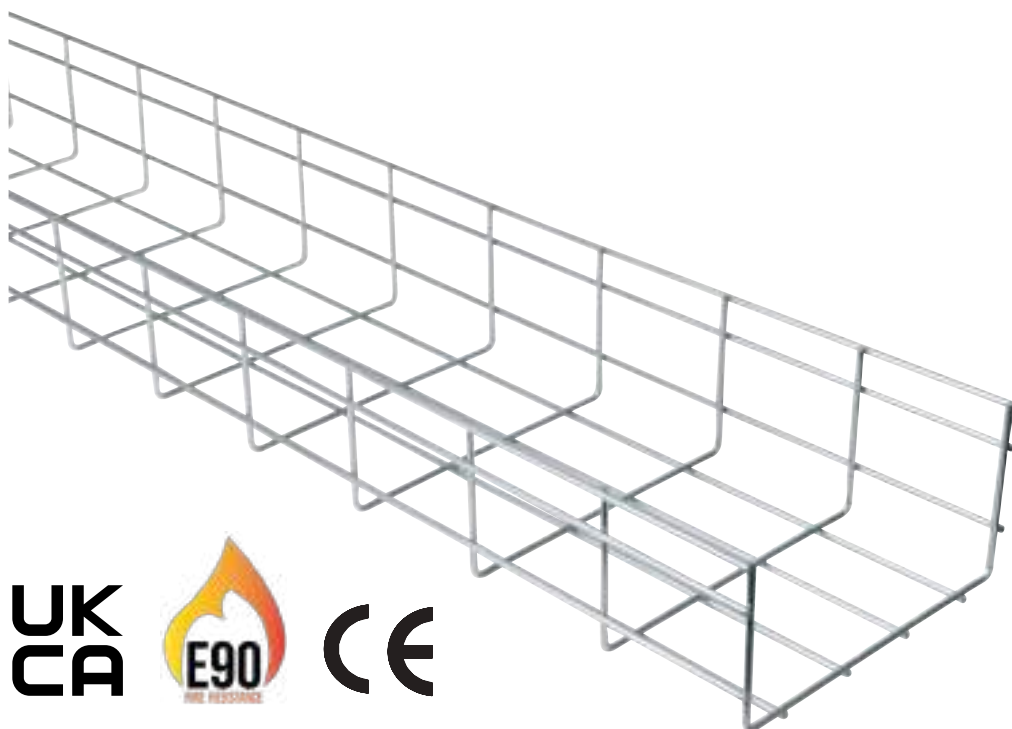

Atkore Marco's Steel Wire Cable Tray is made from direct-drawn bright mild steel, and uses a 100 x 50mm mesh grid.

Each tray is produced in 3 metre lengths and supplied in pack quantities.

The range is complemented by a wide variety of fittings and accessories, all designed to make modifying and installing the tray on site as easy as possible.

## Finishes

### EZ

#### Electro Zinc

BS EN ISO 2081:2008

Recommended for use in interior installations where the atmosphere is non-corrosive. EZ Steel Wire Cable Tray is coated with a thickness of between 5-12 microns.

### HDG

#### Hot-Dip Galvanised

ISO 1461:2009

Recommended for exterior use and in more aggressive atmospheres. HG tray is coated to a minimum thickness of 55 microns. Hot-Dip Galv tray is special item and manufactured to order.

### PG

#### Pre-Galvanised

BS EN 10244-2

Recommended for use in data centres and other interior applications. Marco PG Steel Wire Cable Tray is coated with a thickness of approximately 20 microns (135 gr/m<sup>2</sup> - class B). Pre-Galvanised tray is special item and manufactured to order.

### PC

#### Powder Coated

BS EN 13438

Powder-Coated is recommended for exterior and interior use in a range of atmospheric environments and is capable of withstanding a variety of corrosive conditions. Its installation is also suggested for data centres. Powder Coated tray is special item and manufactured to order.


Steel Wire Cable tray conforms to the following standards: BS EN 61537, IEC 61537.

# Standard Range

## Steel Wire Cable Tray Systems

### 30mm Depth



Steel Wire Cable Tray

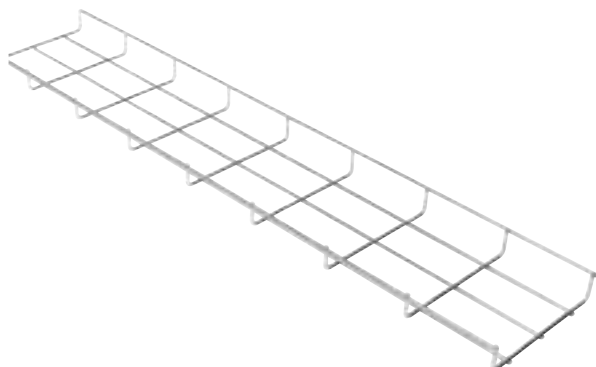

CODE	SIZE	LENGTH	FINISH
MC3050	30 x 50mm	3m	PG, EZ, HDG, PC
MC30100	30 x 100mm	3m	PG, EZ, HDG, PC
MC30150	30 x 150mm	3m	PG, EZ, HDG, PC
MC30200	30 x 200mm	3m	PG, EZ, HDG, PC
MC30300	30 x 300mm	3m	PG, EZ, HDG, PC
MC30400	30 x 400mm	3m	PG, EZ, HDG, PC
MC30450	30 x 450mm	3m	PG, EZ, HDG, PC
MC30500	30 x 500mm	3m	PG, EZ, HDG, PC

### 55mm Depth


Steel Wire Cable Tray

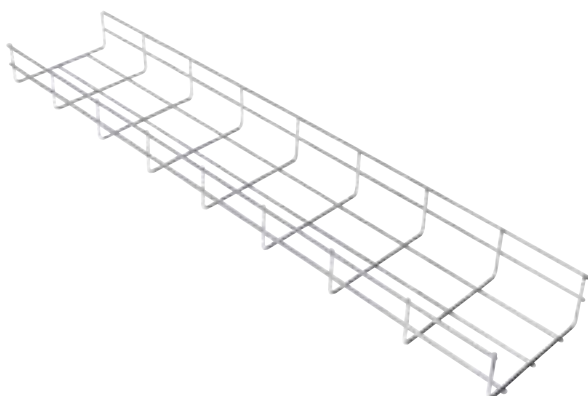

CODE	SIZE	LENGTH	FINISH
MC5550	55 x 50mm	3m	PG, EZ, HDG, PC
MC55100	55 x 100mm	3m	PG, EZ, HDG, PC
MC55150	55 x 150mm	3m	PG, EZ, HDG, PC
MC55200	55 x 200mm	3m	PG, EZ, HDG, PC
MC55300	55 x 300mm	3m	PG, EZ, HDG, PC
MC55400	55 x 400mm	3m	PG, EZ, HDG, PC
MC55450	55 x 450mm	3m	PG, EZ, HDG, PC
MC55500	55 x 500mm	3m	PG, EZ, HDG, PC
MC55600	55 x 600mm	3m	PG, EZ, HDG, PC

### 106mm Depth

Steel Wire Cable Tray

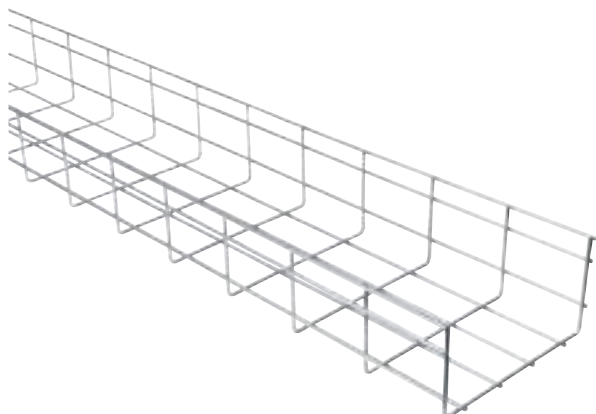

CODE	SIZE	LENGTH	FINISH
MC106100	106 x 100mm	3m	PG, EZ, HDG, PC
MC106150	106 x 150mm	3m	PG, EZ, HDG, PC
MC106200	106 x 200mm	3m	PG, EZ, HDG, PC
MC106300	106 x 300mm	3m	PG, EZ, HDG, PC
MC106400	106 x 400mm	3m	PG, EZ, HDG, PC
MC106450	106 x 450mm	3m	PG, EZ, HDG, PC
MC106500	106 x 500mm	3m	PG, EZ, HDG, PC
MC106600	106 x 600mm	3m	PG, EZ, HDG, PC

Some sizes and finishes are made to order and minimum quantities apply.

# Quik-Clik System

## Steel Wire Cable Tray Systems

### Saving You Time, Saving You Money

### 2 Second Rapid Install



In an effort to save the contractor time and money, Atkore Marco has developed the Quik-Clik system of cable trays.

The innovative coupler can join two lengths of Steel Wire Cable Tray in seconds! Its flexible design allows it to be removed and re-attached with ease, retaining its functionality even after trays have been cut-to-size on site. Supplied pre-fixed as standard, the MCFJC range is also available as individual accessories as part of the Atkore Marco Fast-Fix range.

### 30mm Depth

Quik-Clik System



CODE	SIZE	COUPLER	LENGTH	FINISH
MCM3050	30 x 50mm Quik-Clik	MCFJC30	3m	EZ
MCM30100	30 x 100mm Quik-Clik	MCFJC30	3m	EZ
MCM30150	30 x 150mm Quik-Clik	MCFJC30	3m	EZ
MCM30200	30 x 200mm Quik-Clik	MCFJC30	3m	EZ
MCM30300	30 x 300mm Quik-Clik	MCFJC30-M	3m	EZ
MCM30400	30 x 400mm Quik-Clik	MCFJC30-M	3m	EZ
MCM30450	30 x 450mm Quik-Clik	MCFJC30-M	3m	EZ
MCM30500	30 x 500mm Quik-Clik	MCFJC30-M	3m	EZ
MCM30600	30 x 600mm Quik-Clik	MCFJC30-M	3m	EZ

### 55mm Depth

Quik-Clik System



CODE	SIZE	COUPLER	LENGTH	FINISH
MCM5550	55 x 50mm Quik-Clik	MCFJC	3m	EZ
MCM55100	55 x 100mm Quik-Clik	MCFJC	3m	EZ
MCM55150	55 x 150mm Quik-Clik	MCFJC	3m	EZ
MCM55200	55 x 200mm Quik-Clik	MCFJC	3m	EZ
MCM55300	55 x 300mm Quik-Clik	MCFJCM	3m	EZ
MCM55400	55 x 400mm Quik-Clik	MCFJCL	3m	EZ
MCM55450	55 x 450mm Quik-Clik	MCFJCL	3m	EZ
MCM55500	55 x 500mm Quik-Clik	MCFJCL	3m	EZ
MCM55600	55 x 600mm Quik-Clik	MCFJCL	3m	EZ

### 106mm Depth

Quik-Clik System



CODE	SIZE	COUPLER	LENGTH	FINISH
MCM106100	106 x 100mm Quik-Clik	MCFJCM	3m	EZ
MCM106150	106 x 150mm Quik-Clik	MCFJCM	3m	EZ
MCM106200	106 x 200mm Quik-Clik	MCFJCM	3m	EZ
MCM106300	106 x 300mm Quik-Clik	MCFJCL	3m	EZ
MCM106400	106 x 400mm Quik-Clik	MCFJCL	3m	EZ
MCM106450	106 x 450mm Quik-Clik	MCFJCL	3m	EZ
MCM106500	106 x 500mm Quik-Clik	MCFJCL	3m	EZ
MCM106600	106 x 600mm Quik-Clik	MCFJCL	3m	EZ



Quik-Clik Couplers (MCFJC/30/M/L) Available as Individuals.

## G-Shape Steel Wire Cable Tray

Available in four widths, Atkore Marco's G-Shape tray is designed for under desk and under shelf applications. The tray is also perfect for use above suspended ceilings, its low profile making it great for service containments in small voids.

The shape of the tray allows for both wall and ceiling mounting, negating the need for suspension brackets by being directly fixed to a solid surface using the MCCL, or MCCL25.


The tray can easily be installed and modified on site by one person, fabricating bends using the same accessories used for conventional tray.



CODE	DESCRIPTION	LENGTH	FINISH
MCG6060	60 x 60 G-Shape Tray	3m	EZ
MCG60100	60 x 100 G-Shape Tray	3m	EZ
MCG60150	60 x 150 G-Shape Tray	3m	EZ
MCG60200	60 x 200 G-Shape Tray	3m	EZ



MCG6060



MCG60100



MCG60150



MCG60200

## Mounting Accessories

G-Shape tray can be mounted to both walls and ceilings, by being directly mounted using the following accessories




MCCL25




MCCL

TRAY	WALL	CEILING
MCG6060	MCCL25	MCCL25
MCG60100	MCCL	MCCL
MCG60150	MCCL	MCCL
MCG60200	MCCL	MCCL



Wall Mounted



Ceiling Mounted

## Accessories

G-Shape Tray can be coupled and modified using standard Atkore Marco accessories including:



MCQC



MCQLS



MCQLL



MCCA



MCCB

Atkore Marco Steel Wire Cable tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

# Accessories

## Steel Wire Cable Tray Systems

### Fast-Fix Side Coupler



Screwdriver supplied



Product Information	
Code	MCSSC
Finish	EZ
Pack QTY	50
Supported Sizes	MC5550-MC55200

### Fast-Fix Side Coupler - Large



Screwdriver supplied



Product Information	
Code	MCSSCL
Finish	EZ
Pack QTY	50
Supported Sizes	MC55300-MC55600 MC106100-MC106600

### Fast-Fix Universal Strut Clip



Screwdriver supplied



Product Information	
Code	MCFUSC
Finish	GT
Pack QTY	50
Supported Sizes	MC30100-MC30500 MC55100-MC55600 MC106100-MC106600

### Pre-Galvanised Hook Coupler



Suitable for use with PG trays only



Product Information	
Code	MCHC-S
Finish	PG
Pack QTY	50
Supported Sizes	MC5550 - MC55200

### Quik-Click Coupler - Small



Pre-Coupled version available, see page 291



Product Information	
Code	MCFJC
Finish	EZ
Pack QTY	50
Supported Sizes	MC5550 - MC55200

### Quik-Click Coupler - Medium



Pre-Coupled version available, see page 291



Product Information	
Code	MCFJCM
Finish	EZ
Pack QTY	50
Supported Sizes	MC55300 MC106100 - MC106200

### Quik-Click Coupler - Large



Pre-Coupled version available, see page 291



Product Information	
Code	MCFJCL
Finish	EZ
Pack QTY	50
Supported Sizes	MC55400 - MC55600 MC106300 - MC106600

### Fast Fix Floor Bracket



Product Information	
Code	MCFFB
Finish	PG
Pack QTY	50
Supported Sizes	Fits all sizes

All products supplied with tools are subject to orders of pack quantities.



### Quick-Lock Small



Product Information	
Code	MCQLS
Finish	EZ
Pack QTY	25
Supported Sizes	MC3050-MC30200 MC5550-MC55200 MC106100-MC106200

### Quick-Lock Large



Product Information	
Code	MCQLL
Finish	EZ
Pack QTY	25
Supported Sizes	MC30300-MC30500 MC55300-MC55600 MC106300-MC106600

### Quick Coupler



Product Information	
Code	MCQC
Finish	EZ, GT
Pack QTY	50
Supported Sizes	Fits all sizes



### Suspension Hanger



Product Information	
Code	MCSH
Finish	EZ, GT, PG
Pack QTY	50
Supported Sizes	MC30100-MC30500 MC55100-MC55600 MC106100-MC106600

### Clamp Large - 6.5mm Hole



Product Information	
Code	MCCL
Finish	EZ, GT, PG
Pack QTY	50
Supported Sizes	MC305100-MC30500 MC55100-MC55600 MC106100-MC106600

### Divider Joining Bracket



Product Information	
Code	MCDJB
Finish	EZ
Pack QTY	10
Supported Sizes	Fits all sizes

### Drop Out Plate



Product Information	
Code	MCDOP
Finish	PG
Pack QTY	50
Supported Sizes	Fits all sizes

All of Atkore Marco's Steel Wire Cable Tray products are available from our website as part of the BIM object download

EZ = Electro Zinc  
GT = Geomet  
HDG = Hot-Dip Galvanised  
PC = Powder Coated  
PG = Pre-Galvanised  
TB = Turned Brass



# Accessories


## Steel Wire Cable Tray Systems

### Flexible Conduit Plate - 20 & 25mm



Product Information	
Code	MCFCP
Finish	PG, GT
Pack QTY	20
Supported Sizes	Fits all sizes

### Flexible Conduit Plate - 20, 25 & 32mm




Product Information	
Code	MCFCP3
Finish	PG, GT
Pack QTY	20
Supported Sizes	Fits all sizes

### Wall Bracket/ACC Mounting Plate




Product Information	
Code	MCAMP
Finish	PG, GT
Pack QTY	20
Supported Sizes	MC5550-MC55600 MC106100-MC106600

### Multi-Fix Plate



Product Information	
Code	MCMFP
Finish	PG
Pack QTY	50
Supported Sizes	Fits all sizes

### Universal Support Bracket



Product Information	
Code	MCUSB
Finish	PG
Pack QTY	50
Supported Sizes	MC30100-MC30500 MC55100-MC55600 MC106100-MC106600

### Nut, Bolt & Clamp Assembly



Product Information	
Code	MCCA
Finish	EZ, GT, PG
Pack QTY	50
Supported Sizes	Fits all sizes

### Nut, Bolt & Clamp Fixing Assembly



Product Information	
Code	MCCB
Finish	EZ, GT
Pack QTY	50
Supported Sizes	Fits all sizes

### Clamp Small



Product Information	
Code	MCCS
Finish	EZ, GT
Pack QTY	50
Supported Sizes	Fits all sizes

## Clamp Medium



Product Information	
Code	MCCM
Finish	EZ , GT
Pack QTY	50
Supported Sizes	Fits all sizes

## M6 x 20 Screw, Nut & Washer



Product Information	
Code	MCM620NW
Finish	EZ, GT
Pack QTY	50
Supported Sizes	Fits all sizes

## Splice Plate



Product Information	
Code	MCSP
Finish	PG, GT
Pack QTY	50
Supported Sizes	Fits all sizes

## 90° Splice Plate



Product Information	
Code	MCSP90
Finish	PG
Pack QTY	20
Supported Sizes	Fits all sizes

## Suspension Bracket 6mm & 8mm Rod



Max safe working load 100kg



Product Information	
Code	MCSB68
Finish	PG, GT
Pack QTY	20
Supported Sizes	Fits all sizes

## Suspension Bracket 10mm & 12mm Rod



Max safe working load 100kg



Product Information	
Code	MCSB1012
Finish	PG, GT
Pack QTY	20
Supported Sizes	Fits all sizes

## Suspension Bracket - 50mm Tray



Max safe working load 30kg



Product Information	
Code	MCSB50
Finish	PG, GT
Pack QTY	50
Supported Sizes	MC3050 MC5550

## Suspension Bracket - 100mm Tray



Max safe working load 30kg



Product Information	
Code	MCSB100
Finish	PG, GT
Pack QTY	50
Supported Sizes	MC30100 MC55100

# Accessories

## Steel Wire Cable Tray Systems

### Suspension Bracket - 150mm Tray



Max safe working load 30kg



Product Information	
Code	MCSB150
Finish	PG, GT
Pack QTY	50
Supported Sizes	MC30150 MC55150

### Bracket



Max safe working load 20kg



Product Information	
Code	MCB35
Finish	PG
Pack QTY	50
Supported Sizes	MC3050 MC5550

### Tray Support Bracket - 50mm Tray



Product Information	
Code	MCTS35
Finish	PG
Pack QTY	50
Supported Sizes	MC3050 MC5550

### Earth Terminal



Product Information	
Code	MCET16
Finish	TB
Pack QTY	10
Supported Sizes	MC5550-MC55600 MC106100- MC106600

### Earth Terminal - 30mm Tray



Supplied with PG mounting bracket & accessories for mounting to 30mm tray.



Product Information	
Code	MCET16-30
Finish	TB
Pack QTY	10
Supported Sizes	MC3050 - MC30500

### ID Tags



Product Information	
Code	MCTAG
Finish	-
Pack QTY	50

Coloured ID tags are used to differentiate which services are being carried in which containment. ID Tags can be supplied printed with ID labels to quickly identify cabling being carried in runs of tray.

Labels include:

- ELV
- LV
- DATA/COMMS
- FIRE
- ANCILLARY
- SUB MAINS

### Bolt Croppers



Product Information	
Code	MCROP
Pack QTY	1

EZ = Electro Zinc  
GT = Geomet  
HDG = Hot-Dip Galvanised  
PC = Powder Coated  
PG = Pre-Galvanised  
TB = Turned Brass

## Divider

CODE	DESCRIPTION	DEPTH	LENGTH	FINISH	PACK QTY
MCD30	Steel Wire Cable Tray Divider	30mm	30mm x 3m	PG	20
MCD55	Steel Wire Cable Tray Divider	55mm	55mm x 3m	PG	16
MCD106	Steel Wire Cable Tray Divider	106mm	106mm x 3m	PG	12



## Steel Wire Cable Tray Lid

CODE	DESCRIPTION	TRAY WIDTH	LENGTH	FINISH	PACK QTY
MCL100	100mm Steel Wire Cable Tray Lid	100	2m	PG	6 x 2m
MCL150	150mm Steel Wire Cable Tray Lid	150	2m	PG	4 x 2m
MCL200	200mm Steel Wire Cable Tray Lid	200	2m	PG	4 x 2m
MCL300	300mm Steel Wire Cable Tray Lid	300	2m	PG	2 x 2m
MCL400	400mm Steel Wire Cable Tray Lid	400	2m	PG	2 x 2m
MCL450	450mm Steel Wire Cable Tray Lid	450	2m	PG	2 x 2m
MCL500	500mm Steel Wire Cable Tray Lid	500	2m	PG	2 x 2m
MCL600	600mm Steel Wire Cable Tray Lid	600	2m	PG	2 x 2m



## Fast-Fix Support Bracket

CODE	DESCRIPTION	LUGS	FINISH	PACK QTY
MCCSB100	Fast-Fix Channel Support Bracket for 100mm wide tray, 200mm long	2	PG	50
MCCSB150	Fast-Fix Channel Support Bracket for 150mm wide tray, 250mm long	3	PG	50
MCCSB200	Fast-Fix Channel Support Bracket for 200mm wide tray, 300mm long	4	PG	50
MCCSB300	Fast-Fix Channel Support Bracket for 300mm wide tray x 400mm long	6	PG	25
MCCSB400	Fast-Fix Channel Support Bracket for 400mm wide tray x 500mm long	8	PG	25
MCCSB450	Fast-Fix Channel Support Bracket for 450mm wide tray x 550mm long	9	PG	25
MCCSB500	Fast-Fix Channel Support Bracket for 500mm wide tray x 600mm long	10	PG	25
MCCSB600	Fast-Fix Channel Support Bracket for 600mm wide tray x 700mm long	12	PG	25
MCCSB1000	Fast-Fix Channel Support Bracket for 1000mm wide tray x 1000mm long	20	PG	25





Product Shown  
MCCSB200

## Fast-Fix Wall Bracket


CODE	DESCRIPTION	TRAY WIDTH	LOAD (KG)	FINISH	PACK QTY
MCWFB100	Fast-Fix Wall Bracket	100	175	PG	12
MCWFB150	Fast-Fix Wall Bracket	150	200	PG	12
MCWFB200	Fast-Fix Wall Bracket	200	140	PG	12
MCWFB300	Fast-Fix Wall Bracket	300	100	PG	12
MCWFB400	Fast-Fix Wall Bracket	400	95	PG	12
MCWFB450	Fast-Fix Wall Bracket	450	70	PG	12



## System Overview

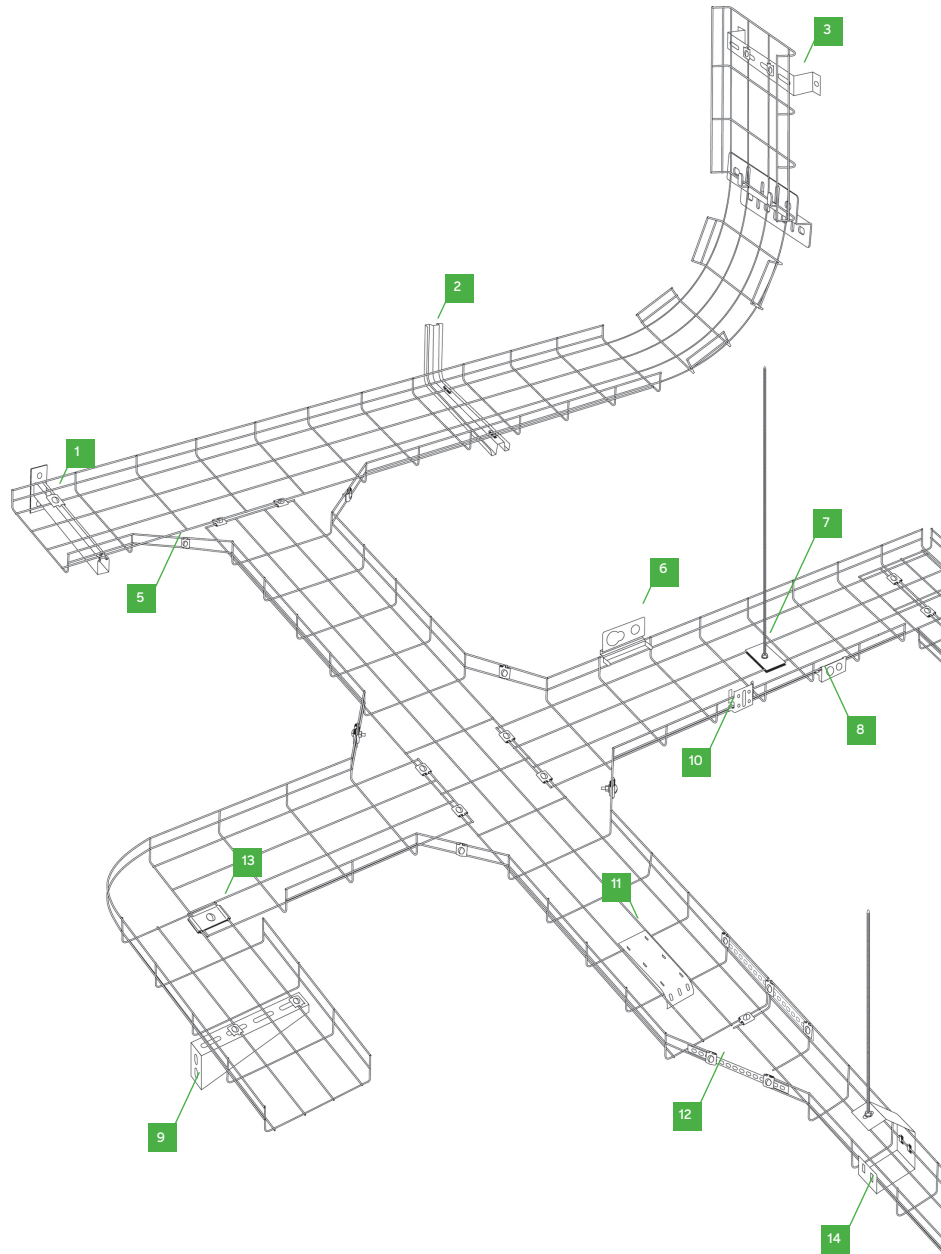

## System Overview

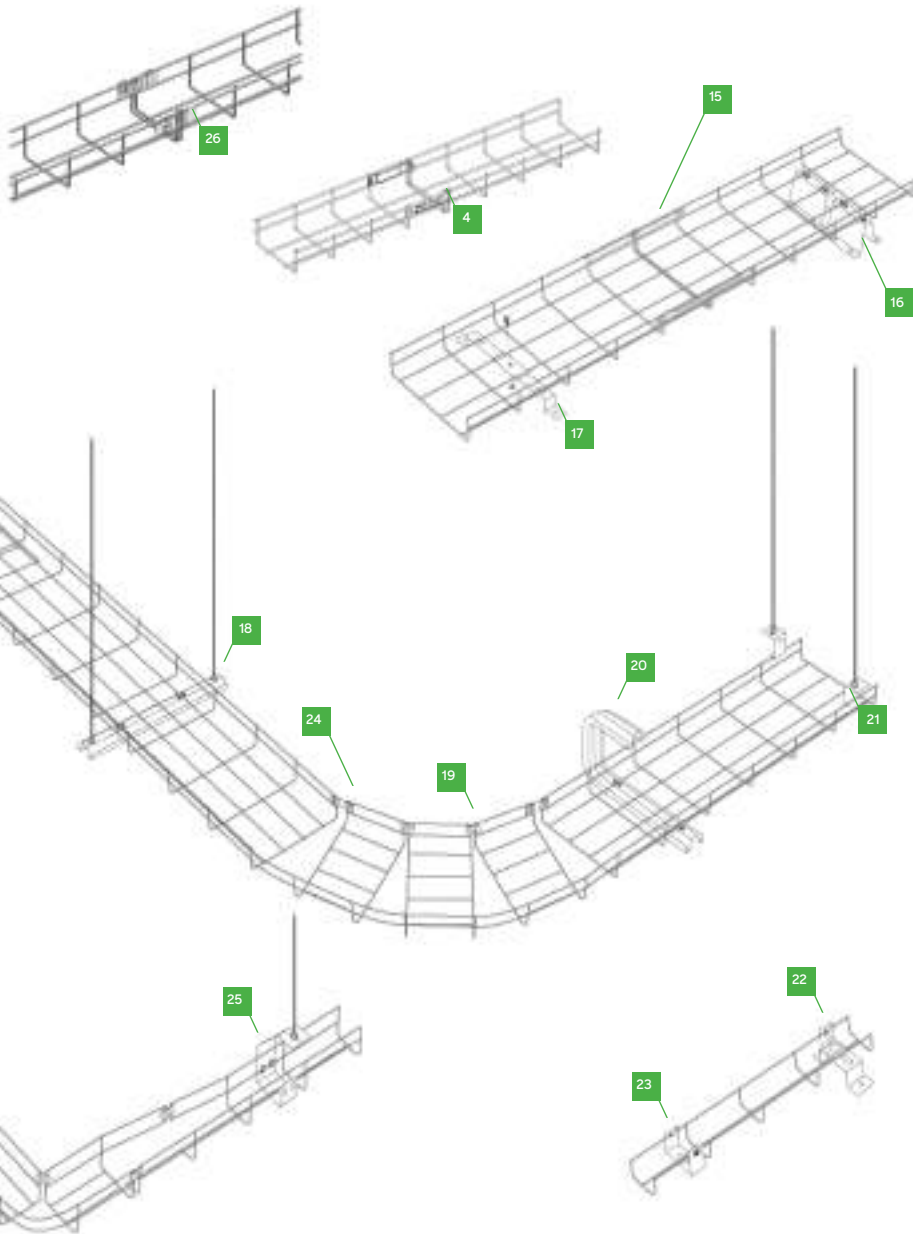

Steel Wire Cable Tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

# Accessories

## Steel Wire Cable Tray Systems

### Fast-Fix Ceiling Bracket

CODE	DESCRIPTION	TRAY WIDTH	LOAD (KG)	FINISH	PACK QTY
MCCFB100	Fast-Fix Ceiling Bracket	100	135	PG	50
MCCFB150	Fast-Fix Ceiling Bracket	150	125	PG	50
MCCFB200	Fast-Fix Ceiling Bracket	200	90	PG	50
MCCFB300	Fast-Fix Ceiling Bracket	300	75	PG	50
MCCFB400	Fast-Fix Ceiling Bracket	400	50	PG	50
MCCFB450	Fast-Fix Ceiling Bracket	450	44	PG	50



### Cantilever Bracket

CODE	DESCRIPTION	TRAY WIDTH	FINISH	PACK QTY
MCCB100	Cantilever Bracket	100	PG	20
MCCB150	Cantilever Bracket	150	PG	20
MCCB200	Cantilever Bracket	200	PG	20
MCCB300	Cantilever Bracket	300	PG	20
MCCB400	Cantilever Bracket	400	PG	20



### Wall/Floor Bracket

CODE	DESCRIPTION	TRAY WIDTH	ADDITIONAL COMPONENTS	FINISH	PACK QTY
MCWB50	Wall/Floor Bracket	50	MCTCS35 / MCCB or MCB35 / MCM620NW	PG	100
MCWB100	Wall/Floor Bracket	100	MCCL / MCM620NW	PG	100
MCWB150	Wall/Floor Bracket	150	MCCL / MCM620NW	PG	100
MCWB200	Wall/Floor Bracket	200	MCCL / MCM620NW	PG	50
MCWB300	Wall/Floor Bracket	300	MCCL / MCM620NW	PG	50
MCWB400	Wall/Floor Bracket	400	MCCL x 2 / MCM620NW x 2	PG	50
MCWB450	Wall/Floor Bracket	450	MCCL x 2 / MCM620NW x 2	PG	25
MCWB500	Wall/Floor Bracket	500	MCCL x 2 / MCM620NW x 2	PG	25
MCWB600	Wall/Floor Bracket	600	MCCL x 2 / MCM620NW x 2	PG	25



All of Atkore Marco's Steel Wire Cable Tray products are available from our website as part of the BIM object download

EZ = Electro Zinc  
GT = Geomet  
HDG = Hot-Dip Galvanised  
PC = Powder Coated  
PG = Pre-Galvanised  
TB = Turned Brass



# Pre Fabrication Guide


## Steel Wire Cable Tray Systems

### Introduction


Available in Electro-Zinc, Pre-Galvanised, Powder-Coated, Hot-Dip Galvanised, Steel Wire Cable Tray is offered in three depths – 30mm, 55mm and 106mm. A wide range of fittings is available to join and support the Steel Wire Cable Tray.

The following section is intended to be used as a guide to fabricating Steel Wire Cable Tray fittings on site. A wide range of fittings and accessories are available to join the tray.

### Reducers

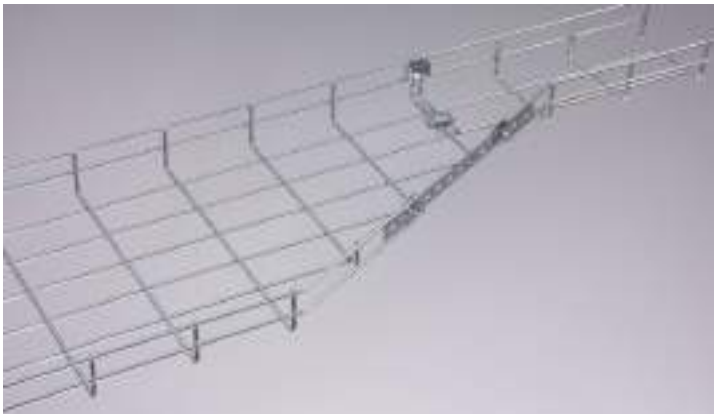


MC55300 and MC55100

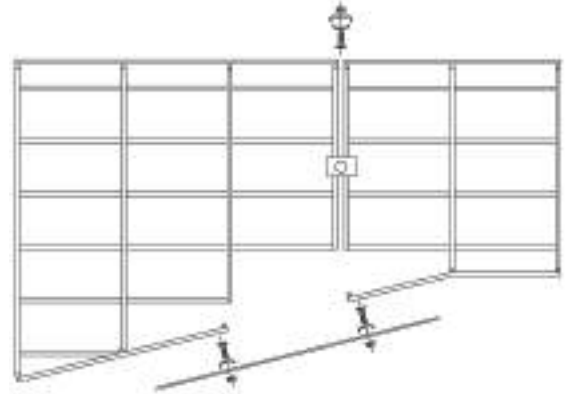

Example of MC55300 - MC55200  
MCCA x 3 or MCCB x 2 plus MCSP x 50mm

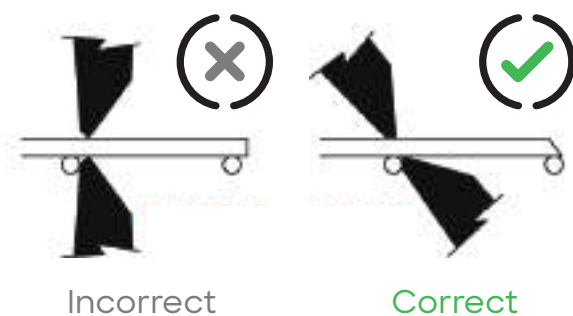


### Wire Cutting Directions



Incorrect

Correct

### Typical Fabricated Reducer Components

CODE	COMPONENT	QTY
MCCA		x2
MCCA		x2
MCSP		x1

All bends are easily fabricated on-site!




## Large Radius Bend

### Fabrication Guide







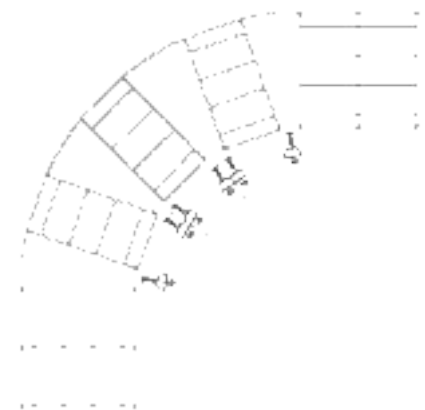






#### NEW LARGE RADIUS BEND - QUICK ASSEMBLY GUIDE

TRAY WIDTH	100mm	150mm	200mm	300mm	400mm	450mm	500mm	600mm
REMOVE SEGMENTS	2	3	4	6	8	9	10	12
MCQLS	2	3	4					
MCQLL				6	8	9	10	12











Alternate sections to be removed.  
Example of MC55200, MCCA x 2,  
MCCB x 2, MCSP x 50mm x 1  
[to be cut to size on site]



TRAY WIDTH (mm)	FASTENING TYPE	MCCB	MCCA	REMOVED SEGMENTS
100	MCCB x 4	 x4		2
150	MCCB x 2 MCSP x 50mm x 1	 x3		3
200	MCCB x 2 MCSP x 50mm x 1	 x4		4
300	MCCB x 2 MCCA x 2 MCSP x 50mm x 1	 x2	 x2	6
400	MCCB x 2 MCCA x 4 MCSP x 50mm x 1	 x2	 x4	8
450	MCCB x 2 MCCA x 6 MCSP x 50mm x 1	 x2	 x6	9
500	MCCA x 9		 x9	10
600	MCCA x 11		 x11	12

Steel Wire Cable tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

## Fabrication Guide




TRAY WIDTH (mm)	FASTENING TYPE	MCM620NW MCCL x 2	MCCA	REMOVED SEGMENTS A	REMOVED SEGMENTS B
100	MCCA		 x1	1	1
150	MCCL x2 MCM620NW x1	 x1	 x1	1	2
200	MCCL x2 MCM620NW x1	 x1		2	2
300	MCCL x2 MCM620NW x1	 x1		2	4
400	MCCL x2 MCM620NW x1	 x1		2	4
450	MCCL x2 MCM620NW x1	 x1		2	4
500	MCCL x2 MCM620NW x1	 x1		2	5
600	MCCL x2 MCM620NW x1	 x1		2	6

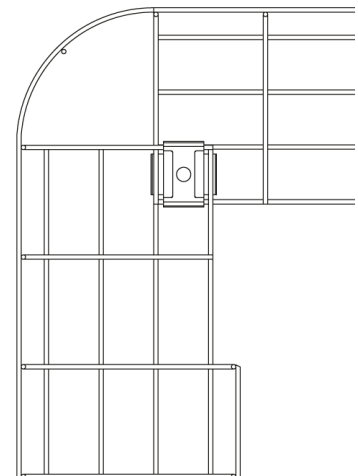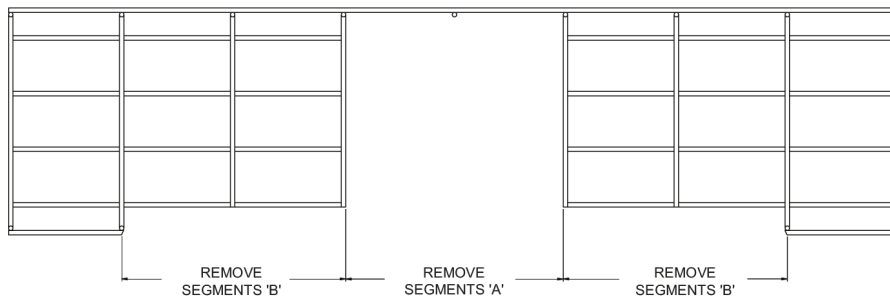







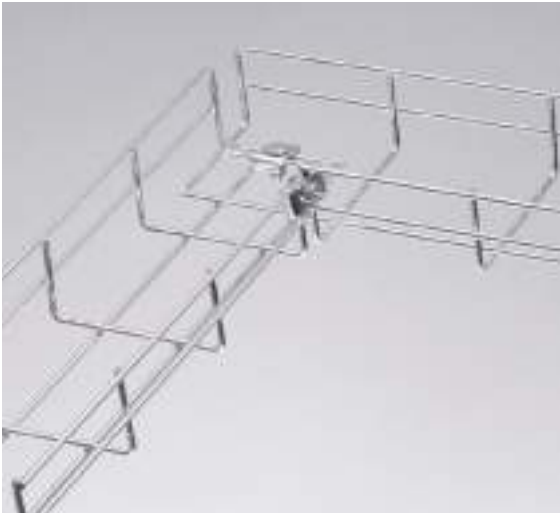


Example of MC55200, MCCL x 2, MCM620NW x 1

# Right Angle Bend

Fabrication Guide




TRAY WIDTH (mm)	FASTENING TYPE	MCCA	REMOVED SEGMENTS
100	MCCA	 x2	1
150	MCCA	 x2	2
200	MCCA	 x2	2
300	MCCA	 x2	3
400	MCCA	 x2	4
450	MCCA	 x2	4
500	MCCA	 x2	5
600	MCCA	 x2	6

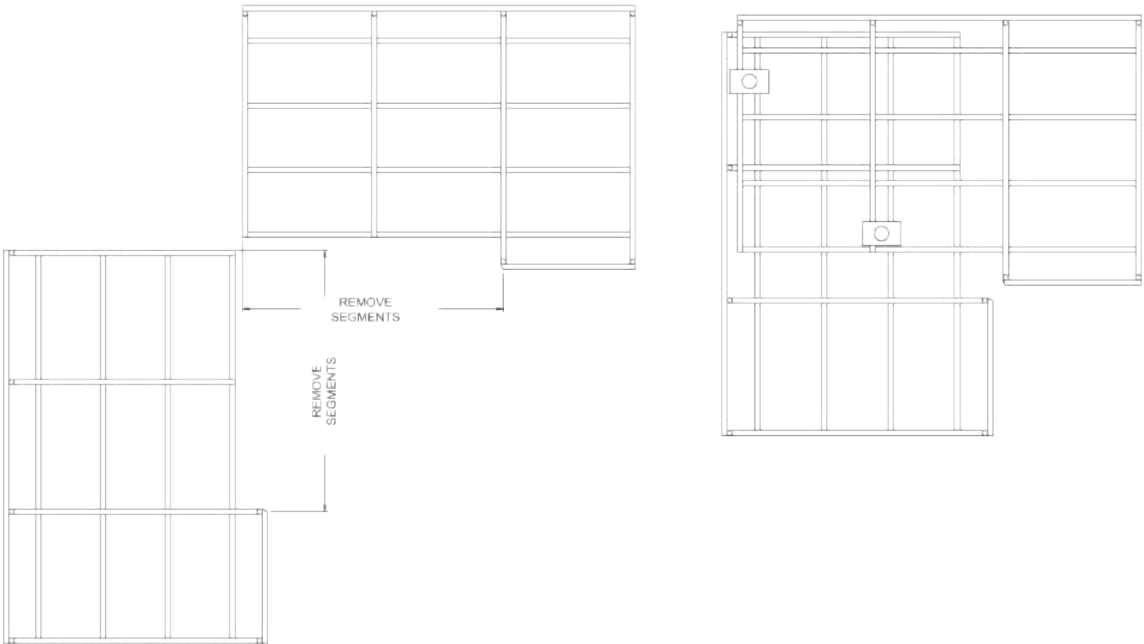







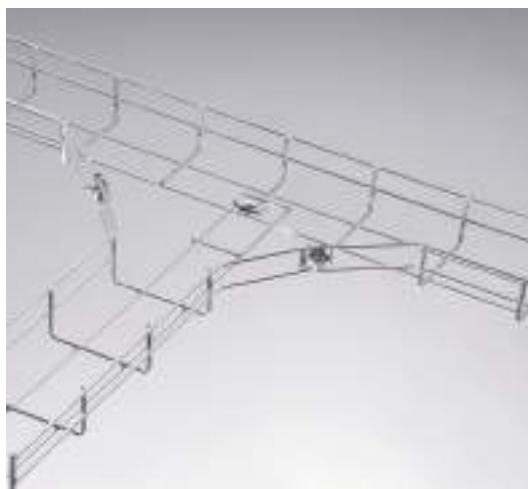


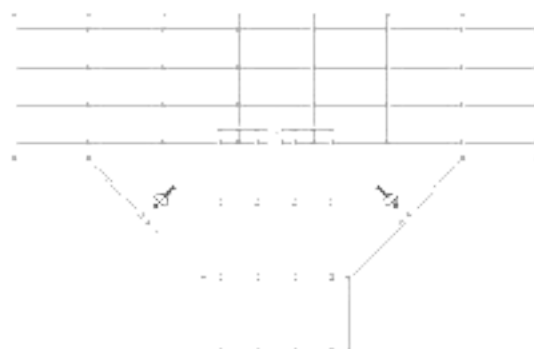
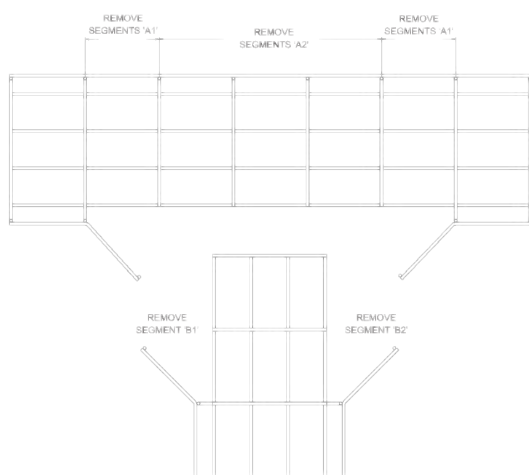
Steel Wire Cable tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

# Small Radius Bend

## Fabrication Guide












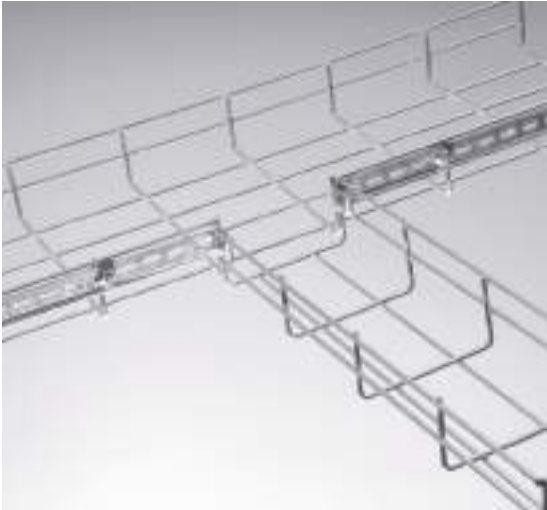







TRAY WIDTH (mm)	FASTENING TYPE	MCCB	MCCA	REMOVED SEGMENTS		REMOVED SEGMENTS	
				A1	A2	B1	B2
100	MCCA		 x3			1	1
150	MCCA MCCB x 2 MCSP x 50mm	 x2	 x1	3	2	1	1
200	MCCA		 x3	3	2	1	1
300	MCCA		 x4	4	2	1	1
400	MCCA		 x4	5	2	1	1
450	MCCA		 x4	5	2	1	1
500	MCCA MCCB x 2 MCSP x 50mm	 x2	 x2	6	2	1	1
600	MCCA MCCB x 2 MCSP x 50mm	 x2	 x2	6	2	1	1




## Right Angle Bend

### Fabrication Guide



TRAY WIDTH (mm)	FASTENING TYPE	MCCB	MCSP90	REMOVED SEGMENTS
100	MCCB MCSP90	 x4	 x2	1
150	MCCB MCSP90	 x4	 x2	2
200	MCCB MCSP90	 x4	 x2	2
300	MCCB MCSP90	 x4	 x2	3
400	MCCB MCSP90	 x4	 x2	4
450	MCCB MCSP90	 x4	 x2	4
500	MCCB MCSP90	 x4	 x2	5
600	MCCB MCSP90	 x4	 x2	6

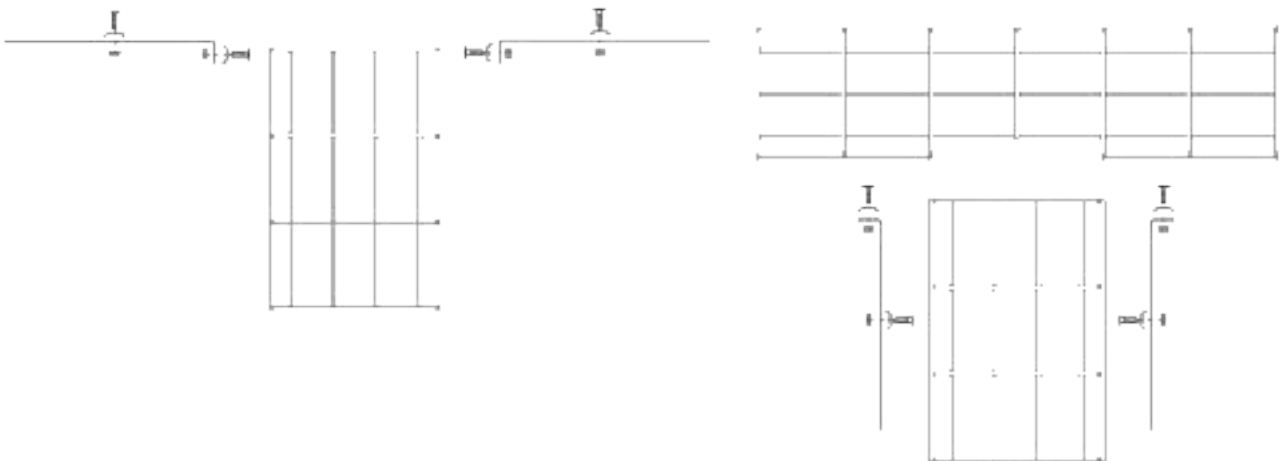

Example shows MC55200 to MC55150

Steel Wire Cable tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

# Wall Support Brackets

## Fabrication Guide - Recommendation

REF NO	DIMENSIONS (MM)	FAST FIX WALL BRACKET	CANTILEVER BRACKET	WALL/FLOOR BRACKET	MCAMP	MCB35
MC3050	30 x 50	-	MCCB100*	MCWB50	-	1
MC30100	30 x 100	MCWFB100	MCCB100	MCWB100 / MCCSB100	-	-
MC30150	30 x 150	MCWFB150	MCCB150	MCWB150 / MCCSB150	-	-
MC30200	30 x 200	MCWFB200	MCCB200	MCWB200 / MCCSB200	-	-
MC30300	30 x 300	MCWFB300	MCCB300	MCWB300 / MCCSB300	-	-
MC30400	30 x 400	MCWFB400	MCCB400	MCWB400 / MCCSB400	-	-
MC30450	30 x 450	MCWFB450	-	MCWB450 / MCCSB450	-	-
MC30500	30 x 500	-	-	MCWB500 / MCCSB500	-	-
MC5550	55 x 50	-	MCCB100*	MCWB50	1	1
MC55100	55 x 100	MCWFB100	MCCB100	MCWB100 / MCCSB100	-	-
MC55150	55 x 150	MCWFB150	MCCB150	MCWB150 / MCCSB150	-	-
MC55200	55 x 200	MCWFB200	MCCB200	MCWB200 / MCCSB200	-	-
MC55300	55 x 300	MCWFB300	MCCB300	MCWB300 / MCCSB300	-	-
MC55400	55 x 400	MCWFB400	MCCB400	MCWB400 / MCCSB400	-	-
MC55450	55 x 450	MCWFB450	-	MCWB450 / MCCSB450	-	-
MC55500	55 x 500	-	-	MCWB500 / MCCSB500	-	-
MC55600	55 x 600	-	-	MCWB600 / MCCSB600	-	-
MC106100	106 x 100	MCWFB100	MCCB100*	MCWB100 / MCCSB100	-	-
MC106150	106 x 150	MCWFB150	MCCB100	MCWB150 / MCCSB150	-	-
MC106200	106 x 200	MCWFB200	MCCB200	MCWB200 / MCCSB200	-	-
MC106300	106 x 300	MCWFB300	MCCB300	MCWB300 / MCCSB300	-	-
MC106400	106 x 400	MCWFB400	MCCB400	MCWB400 / MCCSB400	-	-
MC106450	106 x 450	MCWFB450	-	MCWB450 / MCCSB450	-	-
MC106500	106 x 500	-	-	MCWB500 / MCCSB500	-	-
MC106600	106 x 600	-	-	MCWB600 / MCCSB600	-	-

\* Due to a central wire running down the length of the tray a MCB35 is needed.

Steel Wire Cable Tray conforms to the following standards: BS EN 61537:2007, IEC 61537.

# Suspension Brackets

## Fabrication Guide

REF NO	DIMENSIONS (MM)	SUPPORT CHANNEL STANDARD/FAST FIX	MCSB68 MCSB1012	MCSH	MCSB50	MCSB100	MCSB150
MC3050	30 x 50	-	2	-	1	-	-
MC30100	30 x 100	MCCSB100	2	1	-	1	-
MC30150	30 x 150	MCCSB150	2	1**	-	-	1
MC30200	30 x 200	MCCSB200	2	1	-	-	-
MC30300	30 x 300	MCCSB300	-	-	-	-	-
MC30400	30 x 400	MCCSB400	-	-	-	-	-
MC30450	30 x 450	MCCSB450	-	-	-	-	-
MC30500	30 x 500	MCCSB500	-	-	-	-	-
MC5550	55 x 50	-	2	-	1	-	-
MC55100	55 x 100	MCCSB100	2	1	-	1	-
MC55150	55 x 150	MCCSB150	2	1	-	-	1
MC55200	55 x 200	MCCSB200	2	1	-	-	-
MC55300	55 x 300	MCCSB300	-	-	-	-	-
MC55400	55 x 400	MCCSB400	-	-	-	-	-
MC55450	55 x 450	MCCSB450	-	-	-	-	-
MC55500	55 x 500	MCCSB500	-	-	-	-	-
MC55600	55 x 600	MCCSB600	-	-	-	-	-
MC106100	106 x 100	MCCSB100	2	1	-	-	-
MC106150	106 x 150	MCCSB150	2	1**	-	-	-
MC106200	106 x 200	MCCSB200	-	-	-	-	-
MC106300	106 x 300	MCCSB300	-	-	-	-	-
MC106400	106 x 400	MCCSB400	-	-	-	-	-
MC106450	106 x 450	MCCSB450	-	-	-	-	-
MC106500	106 x 500	MCCSB500	-	-	-	-	-
MC106600	106 x 600	MCCSB600	-	-	-	-	-

Suspension brackets can be used effectively only up to a certain weight. For larger Steel Wire Cable Tray, support channels are recommended.

\*\* Due to a central wire running down the length of the tray, central suspension brackets would need to be staggered.

REF NO	MCQC QUICK COUPLER		MCCA COUPLER		MCSSC COUPLER	MCSSCL COUPLER	MCFJC COUPLER	MCFJCM COUPLER	MCFJCL COUPLER
	SIDE	BASE	SIDE	BASE	SIDE	SIDE	SIDE	SIDE	SIDE
MC3050	2	-	2	-					
MC30100	2	-	2	1					
MC30150	2	-	2	1					
MC30200	2	1	2	1					
MC30300	2	1	2	2					
MC30400	2	2	2	2					
MC30450	2	2	2	2					
MC30500	2	2	2	2					
MC5550	2	-	2	-	2		2		
MC55100	2	-	2	1	2		2		
MC55150	2	1	2	1	2		2		
MC55200	2	1	2	1	2		2		
MC55300	2	1	2	2		2		2	
MC55400	2	2	2	2		2			2
MC55450	2	2	2	2		2			2
MC55500	2	2	2	2		2			2
MC55600	2	3	2	3		2			2
MC106100	2	1	2	1		2		2	
MC106150	2	1	2	1		2		2	
MC106200	2	1	2	1		2			2
MC106300	2	2	2	2		2			2
MC106400	2	3	2	3		2			2
MC106450	2	3	2	3		2			2
MC106500	2	3	2	3		2			2
MC106600	2	3	2	3		2			2

This table is intended to be used as a guide only.  
For large volumes of cable, more support may be necessary




## Cable Capacities

Fabrication Guide

### 30mm Depth

Steel Wire Cable Tray

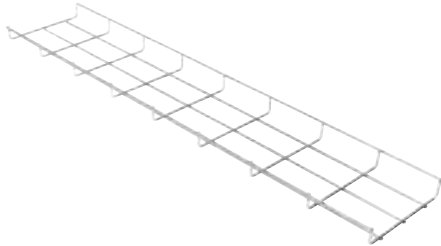


TABLES SHOWING APPROXIMATE CABLE CAPACITIES OF ALL STEEL WIRE CABLE TRAYS USING A 50% FILL RATIO

MC30			APPROX CABLE CAPACITY UNDER NEC 50% RULE		
CABLE TRAY	TOTAL FILL AREA (mm <sup>2</sup> )	NEC 50% RULE: ALLOWABLE FILL AREA (mm <sup>2</sup> )	CAT5e 4-pr UTP (4.9mm diam)	CAT 6 4-pr UTP (6.5mm diam)	CAT 6a 4-pr UTP (8.9 diam)
MC3050	1400	700	37	21	11
MC30100	2800	1400	74	42	23
MC30150	4200	2100	111	63	34
MC30200	5600	2800	148	84	45
MC30300	8400	4200	223	127	68

### 55mm Depth


Steel Wire Cable Tray

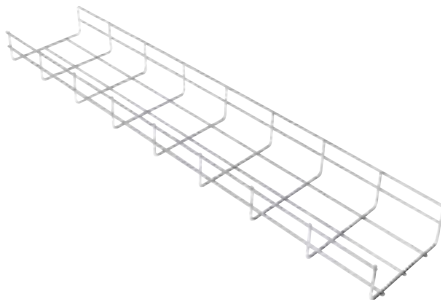

MC55			APPROX CABLE CAPACITY UNDER NEC 50% RULE		
CABLE TRAY	TOTAL FILL AREA (mm <sup>2</sup> )	NEC 50% RULE: ALLOWABLE FILL AREA (mm <sup>2</sup> )	CAT5e 4-pr UTP (4.9mm diam)	CAT 6 4-pr UTP (6.5mm diam)	CAT 6a 4-pr UTP (8.9 diam)
MC5550	2600	1300	69	39	21
MC55100	5200	2600	138	78	42
MC55150	7800	3900	207	118	63
MC55200	10400	5200	276	157	84
MC55300	15600	7800	414	235	125
MC55400	20800	10400	552	313	167
MC55450	23400	11700	620	353	188
MC55500	26000	13000	689	392	209
MC55600	31200	15599.95	827	470	251

### 106mm Depth

Steel Wire Cable Tray

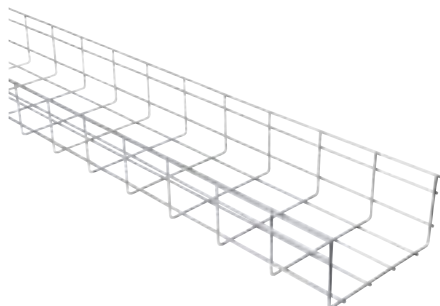

MC106			APPROX CABLE CAPACITY UNDER NEC 50% RULE		
CABLE TRAY	TOTAL FILL AREA (mm <sup>2</sup> )	NEC 50% RULE: ALLOWABLE FILL AREA (mm <sup>2</sup> )	CAT5e 4-pr UTP (4.9mm diam)	CAT 6 4-pr UTP (6.5mm diam)	CAT 6a 4-pr UTP (8.9 diam)
MC106100	10303	5152	273	155	83
MC106150	15452	7726	410	233	124
MC106200	20600	10300	546	310	166
MC106300	30903	15452	819	466	248
MC106400	41200	20600	1092	621	331
MC106450	46348	23174	1229	698	373
MC106500	51503	26752	1366	776	414
MC106600	617800	30900	1639	931	497


## Product Testing Methods

### Permissible Load


Permissible loads are tested for a maximum deflection of 1/100th of the span, with a coupling positioned at 1/5th of the span from the support.

The coefficient applied to the load for coupling in the middle of the span - 0.7.


Permissible load for maximum sag =  $L/100$  on the intermediate span, coupling at 1/5th of the span.

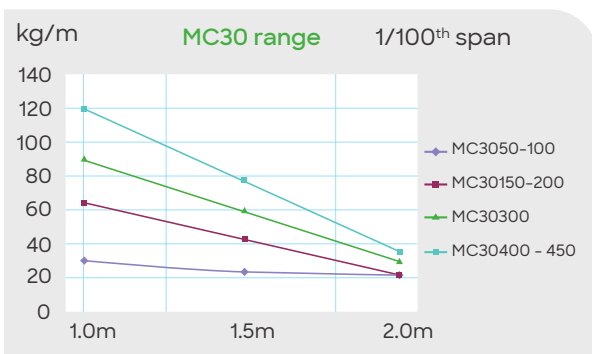

MC30	
CODE	SIZE (mm)
MC3050	30 x 50
MC30100	30 x 100
MC30150	30 x 150
MC30200	30 x 200
MC30300	30 x 300
MC30400	30 x 400
MC30450	30 x 450
MC30500	30 x 500

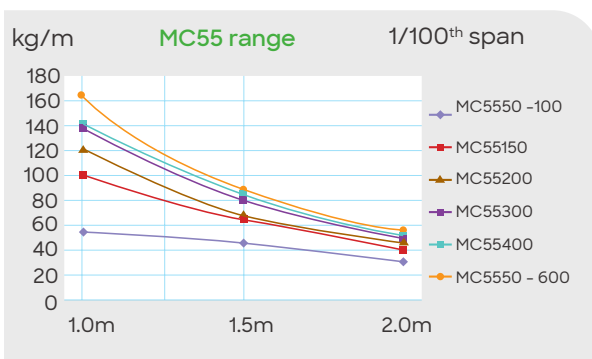

MC55	
CODE	SIZE (mm)
MC5550	55 x 50
MC55100	55 x 100
MC55150	55 x 150
MC55200	55 x 200
MC55300	55 x 300
MC55400	55 x 400
MC55450	55 x 450
MC55500	55 x 500
MC55600	55 x 600

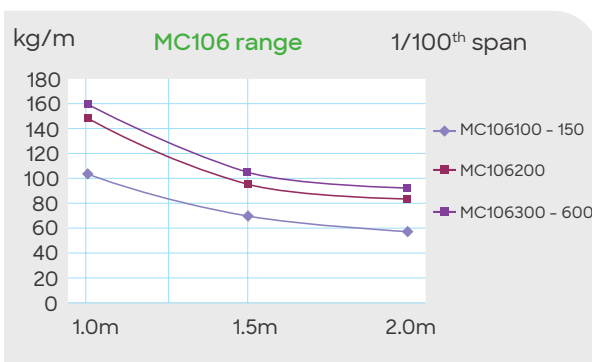

MC106	
CODE	SIZE (mm)
MC106100	106 x 100
MC106150	106 x 150
MC106200	106 x 200
MC106300	106 x 300
MC106400	106 x 400
MC106450	106 x 450
MC106500	106 x 500
MC106600	106 x 600



NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

## Our Own Brand Class 3 Conduit



**20mm 3mtr length- CON20G3/NCM**  
**25mm 3mtr length - CON25G3/NCM**

*Class 4 & BLACK ENAMEL  
Available from stock also*

**20mm 3.75mtr length - CON20G375/NCM**  
**25mm 3.75mtr length - CON25G375/NCM**

*Price breaks given for  
orders of 160L or more*

**Contact us for more information**

**[sales@ncmdistributors.com](mailto:sales@ncmdistributors.com)**

## Conduit Boxes and Accessories



Type	Size mm	Part ref
Terminal	20	BOX20TERM
Terminal	25	BOX25TERM



Type	Size mm	Part ref
Through	20	BOX20THRU
Through	25	BOX25THRU



Type	Size mm	Part ref
Angle	20	BOX20ANG
Angle	25	BOX25ANG



Type	Size mm	Part ref
Tee	20	BOX20TEE
Tee	25	BOX25TEE



Type	Size mm	Part ref
U Branch	20	BOX20U
U Branch	25	BOX25U



Type	Size mm	Part ref
Y Branch	20	BOX20Y
Y Branch	25	BOX25Y



Type	Size mm	Part ref
H Branch	20	BOX20H
H Branch	25	BOX25H



Spacer Bar Saddles

Size	Code
20mm	20SPSADG
25mm	25SPSADG
32mm	32SPSADG
38mm	38SPSADG
50mm	50SPSADG



Distance Saddles

Size	Code
20mm	20DSADG
25mm	25DSADG
32mm	32DSADG
38mm	38DSADG
50mm	50DSADG



Male Brass Bush Short

Size	Code
20mm	20BUSH/S
25mm	25BUSH/S
32mm	32BUSH/S
38mm	38BUSH/S
50mm	50BUSH/S



Male Brass Bush Long

Size	Code
20mm	20BUSH/L
25mm	25BUSH/L
32mm	32BUSH/L
38mm	38BUSH/L
50mm	50BUSH/L



Female Brass Bush

Size	Code
20mm	20BUSH/F
25mm	25BUSH/F
32mm	32BUSH/F
38mm	38BUSH/F
50mm	50BUSH/F



Locking Milled ZP

Size	Code
20mm	20LRMZP
25mm	25LRMZP
32mm	32LRMZP
38mm	38LRMZP
50mm	50LRMZP



Coupler

Size	Code
20mm	20COUP/G
25mm	25COUP/G
32mm	32COUP/G
38mm	38COUP/G
50mm	50COUP/G



Locknut Hexagon ZP

Size	Code
20mm	20LNHZP
25mm	25LNHZP
32mm	32LNHZP
38mm	38LNHZP
50mm	50LNHZP



Box Lids Galv

Size	Code
	CONLID/G



Nipples ZP

Size	Code
20mm	20NIP/ZP
25mm	25NIP/ZP
32mm	32NIP/ZP
38mm	38NIP/ZP

**Black enamel accessories  
available from stock**


*for the part number add 'BE' to the end  
of the part number*



## Conlok Boxes and Accessories

The Conlok system is a quick fit unthreaded conduit system, designed to dramatically reduce labour and increase speed of installation. Standard conduit tube is still used and the accessories replaced with Conlok boxes, couplings and adaptors

The British Standard Institute has accredited the Conlok system with BS EN 61386-21:2004 the same BS no. as the traditional screwed system. Conlok is the only quick fit system to achieve this standard and the only system to offer a full range of 20mm and 25mm accessories.

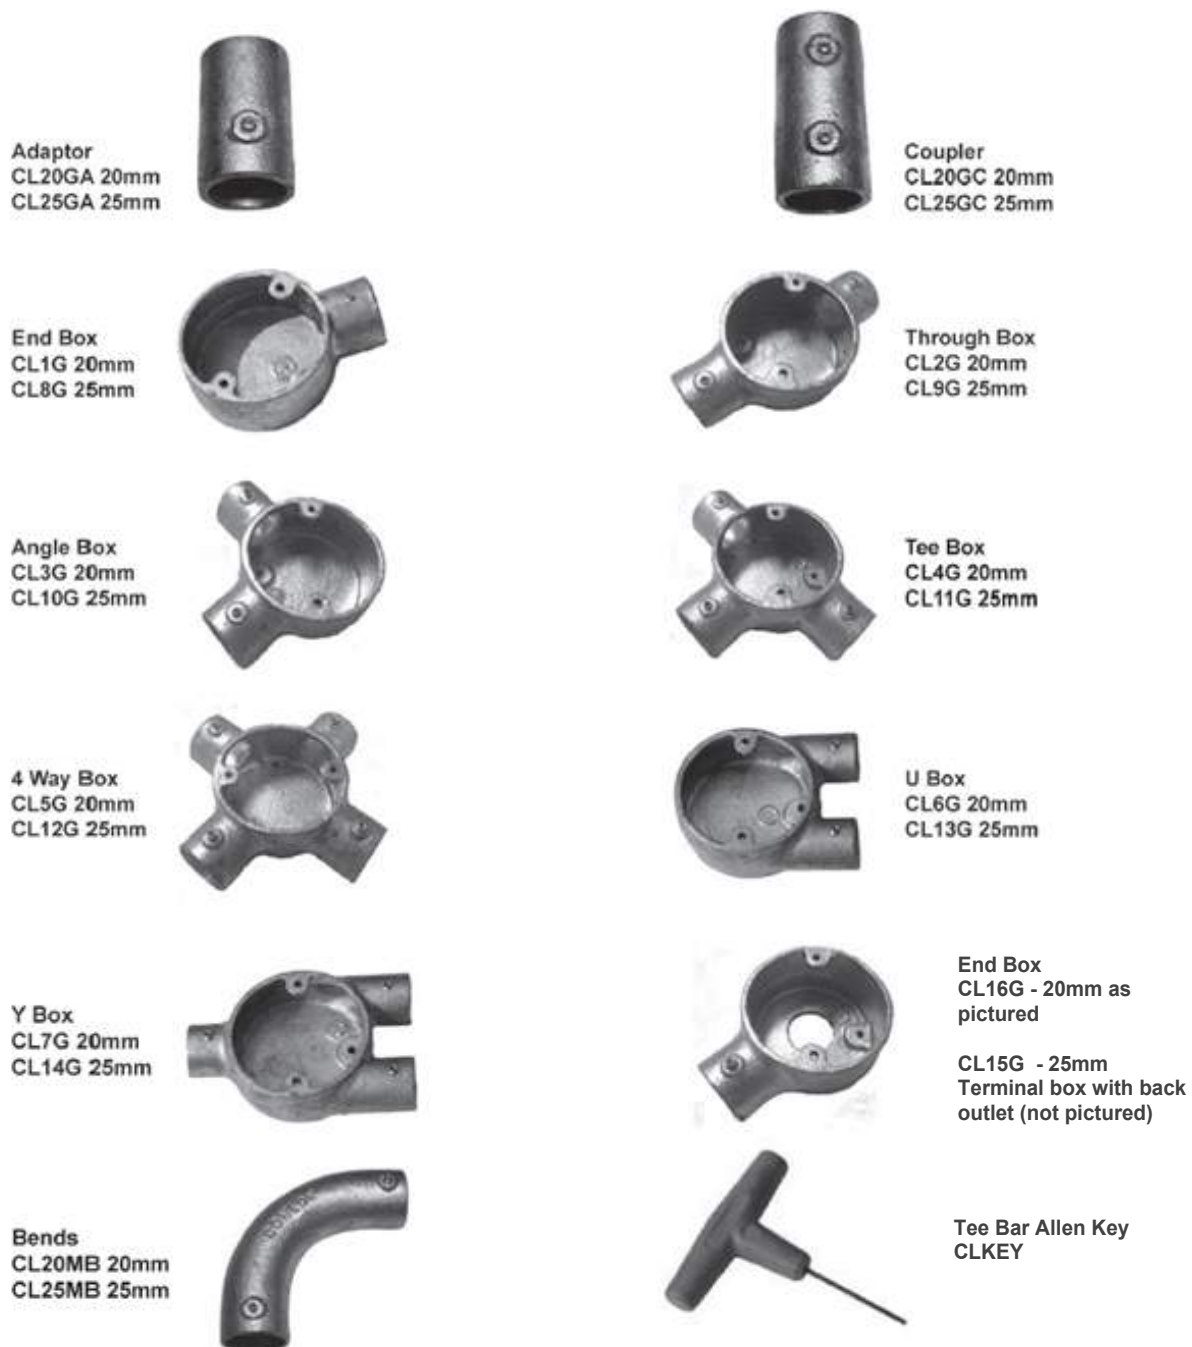



**M&E Solutions  
Supplied by**





## EA II Hammerset anchor - Internal threaded anchor with rim



EA II approved range available from sizes M6 - M20.

- The rim prevents the anchor from slipping too deep into the drill hole.
- The EA II is easy to hammer in and expand.
- Maximum load capacity in (non-cracked) concrete.
- Can be used with components thicker than 80 mm.
- The EA II M12x50 D with a greater sleeve diameter is specifically designed for fixing diamond saws and core drill equipment.



**EA II reduced anchorage depth hef 25 mm.**

- Reduced drill hole depth of the EA II  $h_{ef} = 25$  mm allows much faster installation and reduces the risk of reinforcement strikes.
- ETA compliant utilisation of commercial threaded bars and screws is possible.
- The black fixing point prevents the anchor from falling out of the drill hole before being expanded.

## FAZ II



FAZ II available from sizes M6 - M24  
Diamond Drilling Now Approved!

- The tried-and-trusted expansion clip makes large load-bearing capacities possible, so fewer fixing points and smaller anchor plates are required.
- The reduced anchorage depths makes considerably shorter drill hole depths possible, so providing a noticeably faster installation.
- Fewer hammer blows and minimal torque slippage ensure safe and easy setting.
- The international approvals guarantee maximum safety and the best performance. Applications in earthquake regions (Seismic) are also covered by these approvals.



**FAZ II K Anchor Bolt - Shorter Version**


- The shorter bolt with reduced embedment depth is the economic choice for numerous applications such as substructures for façades and the fixing of cable trays.
- **NEW! Market introduction of the FAZ II M6.**
- Smallest diameter ETA certified.
- The first bolt anchor M6 Option 1 in the world.

## FBN II Anchor Bolt - Powerful anchor for ultimate demands



FBN II available from sizes M6 - M20

- The standard anchorage depth achieves the maximum load-bearing capacity in non-cracked concrete.
- Reduced anchorage depth reduces the drill hole depth, minimizes installation time.
- Long threads increase the range of base plate thickness's possible allowing stand-off installations and increased flexibility.
- Less hammer blows and the minimal torque slippage allow for a noticeably simpler installation.
- Standard anchorage depth achieves large load-bearing capacities so fewer fixing points and smaller anchor plates are required.
- The drive-in pin protects the thread from damage, and ensures faster installation or dismantling of the attachments.



**FBN II GS with large washer for flexible use in non-cracked concrete.**

- The pre-fitted washer ensures a fast installation.
- The large washer creates a greater supporting surface which is ideal for timber constructions.

# Metallic Cable Protection

## Galvanised Steel Conduit & Glands



- -100°C to +300°C
- High mechanical Strength
- Highly flexible
- IP40
- Manufactured to BS EN 61386

### Galvanised Steel – Self Coloured

Part Number	Size Nominal	Length (m)	Pack Qty
KMS16/30M	16	30	1
KMS20/**M	20	10, 30, 50	1
KMS25/**M	25	10, 30, 50	1
KMS32/30M	32	30	1

\*\* add reel length eg: KMS25/10M



- -15°C to +70°C
- High mechanical Strength
- Highly flexible
- IP54
- Manufactured to BS EN 61386

### PVC Coated Galvanised Steel – Black

Part Number	Size Nominal	Length (m)	Pack Qty
KMPS16/30M	16	30	1
KMPS20/**M	20	10, 30, 50	1
KMPS25/**M	25	10, 30, 50	1
KMPS32/30M	32	30	1

\*\* add reel length eg: KMPS20/50M



- -100°C to +300°C
- High mechanical Strength
- 2 part fitting

### Male Fixed Gland – Nickel Plated Brass

Part Number	Size Nominal	Pack Qty
KMG16/M20/F	16	10
KMG20/M20/F	20	10
KMG25/M25/F	25	10
KMG32/M32/F	32	2



- -100°C to +300°C
- High mechanical Strength
- 2 part fitting

### Male Swivel Gland – Nickel Plated Brass

Part Number	Size Nominal	Pack Qty
KMG16/M20/S	16	10
KMG20/M20/S	20	10
KMG25/M25/S	25	10
KMG32/M32/S	32	2

## Galvanised Steel / PVC Contractor Pack



- -15°C to +70°C
- High mechanical Strength
- Highly flexible
- IP54

#### Pack Contents

- 10 metres of conduit
- 10 fixed glands
- 10 locknuts

Part Number	Size Nominal	Pack Qty
KMPS/20CP	20mm x M20	1
KMPS/25/CP	25mm x M25	1



# Metallic Cable Protection

## Liquid Tight Conduit & Glands

**Atkore™**  
**Koreflex**



- -20°C to +105°C
- High mechanical Strength
- Smooth outer jacket
- IP66, IP67
- Manufactured to BS EN 61386

**NCM**  
NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

### Galvanised Steel with PVC Cover - Black

Part Number	Size Nominal	Length (m)	Pack Qty
KML16/50M	16	50	1
KML20/50M	20	50	1
KML25/50M	25	50	1
KML32/10M	32	10	1



- -50°C to +135°C
- Liquid Tight
- IP66, IP67



- -50°C to +135°C
- Liquid Tight
- IP66, IP67

### Male Fixed Gland - Nickel Plated Brass

Part Number	Size Nominal	Pack Qty
KMLG16/M20	16	10
KMLG20/M20	20	10
KMLG25/M25	25	10
KMLG32/M32	32	2

### 90° Fixed Gland - Nickel Plated Brass

Part Number	Size Nominal	Pack Qty
KMLGE16/M20	16	10
KMLGE20/M20	20	10
KMLGE25/M25	25	10
KMLGE32/M32	32	2

## Liquid Tight Contractor Pack



- -20°C to +105°C
- High mechanical Strength
- Liquid Tight
- IP66, IP67

#### Pack Contents

- 10 metres of conduit
- 10 glands
- 10 locknuts

Part Number	Size Nominal	Pack Qty
KML/20CP	20mm x M20	1
KML/25CP	25mm x M25	1

# Non Metallic Cable Protection

## Polypropylene & Nylon Conduit & Glands



- -20°C to +90°C
- Flame Propagating (NFR - Non Flame Retardant)
- Polypropylene

### NFR - Polypropylene

Part Number	Size Nominal	Length (m)	Pack Qty
KNPNFR20/100M	20	100	1
KNPNFR25/50M	25	50	1



- -20°C to +90°C
- Self extinguishing
- Acid resistant
- Manufactured to BS EN 61386

### Polypropylene - Black

Part Number	Size Nominal	Length (m)	Pack Qty
KNP16/100M	16	100	1
KNP20/100M	20	100	1
KNP25/50M	25	50	1
KNP32/50M	32	50	1



- -40°C to +120°C
- Self extinguishing
- High impact Strength
- Highly flexible
- Manufactured to BS EN 61386

### Nylon PA6 - Black

Part Number	Size Nominal	Length (m)	Pack Qty
KNY16/50M	16	50	1
KNY20/50M	20	50	1
KNY25/50M	25	50	1
KNY32/25M	32	25	1



- -20°C to +90°C
- Hinged
- IP40

### Hinged - Polypropylene

Part Number	Size Nominal	Pack Qty
KNGH20/M20	20	10
KNGH25/M25	25	10



- -40°C to +120°C
- One piece
- IP66

### Male Gland - Nylon

Part Number	Size Nominal	Pack Qty
KNYG16/M16	16	10
KNYG20/M20	20	10
KNYG25/M25	25	10
KNYG32/M32	32	10



- -40°C to +120°C
- One piece
- IP66

### Male 90° Gland - Nylon

Part Number	Size Nominal	Pack Qty
KNYGE16/M16	16	10
KNYGE20/M20	20	10
KNYGE25/M25	25	10
KNYGE32/M32	32	10

## Polypropylene & Nylon Contractor Pack



- 10 metres of conduit
- 10 Polypropylene glands
- 10 Locknuts
- IP66
- Available in Black or White

### Polypropylene

Black Part Number	White Part Number	Size Nominal	Pack Qty
KNP/20CP	KNP/20WCP	20mm x M20	1
KNP/25CP	KNP/25WCP	25mm x M25	1



- 10 metres of conduit
- 10 Nylon glands
- 10 Locknuts
- IP66

### Nylon PA6 - Black

Part Number	Size Nominal	Pack Qty
KNY/20CP	20mm x M20	1
KNY/25CP	25mm x M25	1

# Non Metallic Cable Protection

## White Polypropylene Conduit & Glands



- -20°C to +90°C
- Self extinguishing
- Acid resistant
- Manufactured to BS EN 61386



- -20°C to +90°C
- One piece
- IP66

### Polypropylene – White

Part Number	Size	Nominal	Length (m)	Pack Qty
KNP20W/100M*	20		100	1
KNP25W/50M*	25		50	1

### Male Straight Gland – Polypropylene

Part Number	Size	Nominal	Pack Qty
KNG20W/M20*	20		10
KNG25W/M25*	25		10

\* Also available as a Contractor Pack – See page 4 for details

## PVC Spiral Conduit & Glands



- -5°C to +70°C
- Highly flexible
- Self extinguishing
- Manufactured to BS EN 61386



- -5°C to +70°C
- IP65


### PVC – Black

Part Number	Size	Nominal	Length (m)	Pack Qty
KNSP16/30M	16		30	1
KNSP20/30M	20		30	1
KNSP25/30M	25		30	1
KNSP32/30M	32		30	1

### Male Straight Gland – Nylon

Part Number	Size	Nominal	Pack Qty
KNSPG16/M16	16		10
KNSPG20/M20	20		10
KNSPG25/M25	25		10
KNSPG32/M32	32		10

## PVC Spiral Contractor Pack



- -5°C to +70°C
- Highly flexible
- Self extinguishing
- Manufactured to BS EN 61386
- IP65

#### Pack Contents

- 10 metres of conduit
- 10 glands
- 10 locknuts

Part Number	Size	Nominal	Pack Qty
KNSP/20CP	20mm x M20		1
KNSP/25CP	25mm x M25		1

# Non Metallic Cable Protection

## White Polypropylene Conduit & Glands



- -20°C to +90°C
- Self extinguishing
- Acid resistant
- Manufactured to BS EN 61386



- -20°C to +90°C
- One piece
- IP66

### Polypropylene – White

Part Number	Size	Nominal	Length (m)	Pack Qty
KNP20W/100M*	20		100	1
KNP25W/50M*	25		50	1

### Male Straight Gland – Polypropylene

Part Number	Size	Nominal	Pack Qty
KNG20W/M20*	20		10
KNG25W/M25*	25		10

\* Also available as a Contractor Pack – See page 4 for details

## PVC Spiral Conduit & Glands



- -5°C to +70°C
- Highly flexible
- Self extinguishing
- Manufactured to BS EN 61386



- -5°C to +70°C
- IP65


### PVC – Black

Part Number	Size	Nominal	Length (m)	Pack Qty
KNSP16/30M	16		30	1
KNSP20/30M	20		30	1
KNSP25/30M	25		30	1
KNSP32/30M	32		30	1

### Male Straight Gland – Nylon

Part Number	Size	Nominal	Pack Qty
KNSPG16/M16	16		10
KNSPG20/M20	20		10
KNSPG25/M25	25		10
KNSPG32/M32	32		10

## PVC Spiral Contractor Pack



- -5°C to +70°C
- Highly flexible
- Self extinguishing
- Manufactured to BS EN 61386
- IP65

#### Pack Contents

- 10 metres of conduit
- 10 glands
- 10 locknuts









Part Number	Size	Nominal	Pack Qty
KNSP/20CP	20mm x M20		1
KNSP/25CP	25mm x M25		1

## Gripple Wire and Accessories

Items available from stock and on request

Product Code	Image	Description	SWL (kg)
BL2-UK-10P		B-Lock Side Release Hangers (bag of 10)	60
ROP-2MM-100M-BL2-UK		B-Lock Wire Rope (100m reel of 2mm wire)	60
HF1-LG-1M		Standard Hanger No.1 c/w 1m Wire Rope & Loop End Fixing	10
HF1-LG-2M		Standard Hanger No.1 c/w 2m Wire Rope & Loop End Fixing	10
HF1-LG-3M		Standard Hanger No.1 c/w 3m Wire Rope & Loop End Fixing	10
HF1-LG-4M		Standard Hanger No.1 c/w 4m Wire Rope & Loop End Fixing	10
HF1-LG-5M		Standard Hanger No.1 c/w 5m Wire Rope & Loop End Fixing	10
HF2-LG-1M		Standard Hanger No.2 c/w 1m Wire Rope & Loop End Fixing	45
HF2-LG-2M		Standard Hanger No.2 c/w 2m Wire Rope & Loop End Fixing	45
HF2-LG-3M		Standard Hanger No.2 c/w 3m Wire Rope & Loop End Fixing	45
HF2-LG-4M		Standard Hanger No.2 c/w 4m Wire Rope & Loop End Fixing	45
HF2-LG-5M		Standard Hanger No.2 c/w 5m Wire Rope & Loop End Fixing	45
HF1-S6G-1M		Standard Hanger No.1 c/w 1m Wire Rope & M6 Stud End Fixing	10
HF1-S6G-2M		Standard Hanger No.1 c/w 2m Wire Rope & M6 Stud End Fixing	10
HF1-S6G-3M		Standard Hanger No.1 c/w 3m Wire Rope & M6 Stud End Fixing	10
HF1-S6G-4M		Standard Hanger No.1 c/w 4m Wire Rope & M6 Stud End Fixing	10
HF1-S6G-5M		Standard Hanger No.1 c/w 5m Wire Rope & M6 Stud End Fixing	10
HF2-S8G-1M		Standard Hanger No.2 c/w 1m Wire Rope & M8 Stud End Fixing	45
HF2-S8G-2M		Standard Hanger No.2 c/w 2m Wire Rope & M8 Stud End Fixing	45
HF2-S8G-3M		Standard Hanger No.2 c/w 3m Wire Rope & M8 Stud End Fixing	45
HF2-S8G-4M		Standard Hanger No.2 c/w 4m Wire Rope & M8 Stud End Fixing	45
HF2-S8G-5M		Standard Hanger No.2 c/w 5m Wire Rope & M8 Stud End Fixing	45




Product Code	Image	Description	SWL (kg)
AY2-HG-150MM		Y-Fit Accessory c/w 150mm Wire Rope & Snap Hook End Fixing	45
AY2-HG-300MM		Y-Fit Accessory c/w 300mm Wire Rope & Snap Hook End Fixing	45
AY2-HG-500MM		Y-Fit Accessory c/w 500mm Wire Rope & Snap Hook End Fixing	45
AY2-NG-150MM		Y-Fit Accessory c/w 150mm Wire Rope & Link Hook End Fixing	45
AY2-NG-300MM		Y-Fit Accessory c/w 300mm Wire Rope & Link Hook End Fixing	45
AY2-NG-500MM		Y-Fit Accessory c/w 500mm Wire Rope & Link Hook End Fixing	45
AY2-TG-150MM		Y-Fit Accessory c/w 150mm Wire Rope & Toggle End Fixing	45
AY2-TG-300MM		Y-Fit Accessory c/w 300mm Wire Rope & Toggle End Fixing	45
AY2-TG-500MM		Y-Fit Accessory c/w 500mm Wire Rope & Toggle End Fixing	45
FTB-250		Fast Trak Standard Bracket 250mm	180
FTB-350		Fast Trak Standard Bracket 350mm	180
FTB-450		Fast Trak Standard Bracket 450mm	180
FTB-600		Fast Trak Standard Bracket 650mm	180
FTB-750		Fast Trak Standard Bracket 750mm	180
FTB-900		Fast Trak Standard Bracket 900mm	180
FTBL-250		Fast Trak Low Profile Bracket 250mm	180
FTBL-350		Fast Trak Low Profile Bracket 350mm	180
FTBL-450		Fast Trak - Low Profile Bracket 450mm	180
FTBL-600		Fast Trak Low Profile Bracket 650mm	80
FTBL-750		Fast Trak Low Profile Bracket 750mm	64
FTBL-900		Fast Trak Low Profile Bracket 900mm	48
FTBS-180		Fast Trak Single Load Bracket 180mm	15
FTBT-200		Fast Trak Twin Load Bracket 200mm	30
FTBT-300		Fast Trak Twin Load Bracket 300mm	30
FTBT-400		Fast Trak Twin Load Bracket 400mm	30
FTT-135		Fast Trak Track 135mm	90
FTT-285		Fast Trak Track 285mm	90
FTT-535		Fast Trak Track 535mm	90
FTT-785		Fast Trak Track 785mm	90
FTT-1035		Fast Trak Track 1035mm	90



NATIONAL CABLE MANAGEMENT  
DISTRIBUTORS LTD

## Chanel Sockets

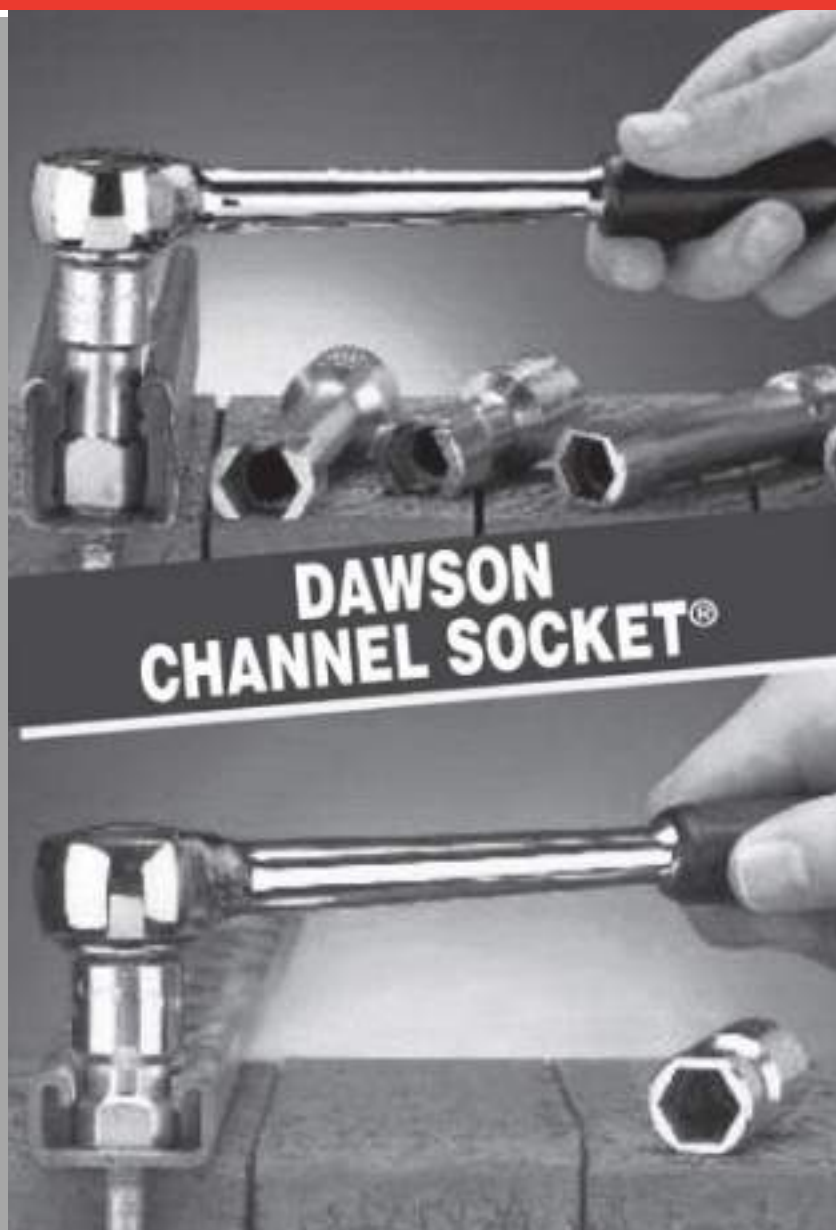

### Dawson Channel Socket

A unique tool which fits standard 1/2" drive ratchet handles

#### Available:

- 17AF/41 - 17mm a/f M10 - 41 x 41mm (Channel / Strut)
- 19AF/41 - 19mm a/f M12 - 41 x 41mm (Channel / Strut)
- 17AF/21 - 17mm a/f M10 - 41 x 21mm (Channel / Strut)
- 17AF/62-83 - 17mm a/f M10 - 83/62 x 41mm (Channel / Strut)
- 19AF/62-83 - 19mm a/f M12 - 83/62 x 41mm (Channel / Strut)

**walraven**


## BIS 2S Clamps with Lining (M8/M10)

Part No.	D	D	DN	G	B	H	h	b x s	Fa,z
333 3 016	12 - 14	¼	8	M8	55	34	21	20 x 1,25	22
333 3 019	15 - 19	¼	10	M8	58	37	22	20 x 1,25	22
333 3 023	20 - 23	¼	15	M8	63	42	25	20 x 1,25	22C
333 3 030	25 - 28	¼	20	M8	68	47	27	20 x 1,25	22C
333 3 038	32 - 35	1	25	M8	75	54	31	20 x 1,25	22C
333 3 043	38 - 43	1½	32	M8	83	62	34	20 x 1,25	22C
333 3 049	44 - 49	1½	40	M8	92	71	39	20 x 1,25	22C
334 3 019	15 - 19	¼	10	M8/10	58	44	29	20 x 1,25	22
334 3 023	20 - 23	¼	15	M8/10	63	49	32	20 x 1,25	22
334 3 030	25 - 28	¼	20	M8/10	68	54	34	20 x 1,25	22
334 3 038	32 - 35	1	25	M8/10	75	61	38	20 x 1,25	22
334 3 043	38 - 43	1½	32	M8/10	83	69	41	20 x 1,25	22
334 3 049	44 - 49	1½	40	M8/10	92	78	45	20 x 1,25	22C
334 3 056	50 - 56	-	-	M8/10	97	84	49	20 x 1,25	22C
334 3 063	57 - 63	2	50	M8/10	102	88	51	20 x 1,50	22C
334 3 064	63 - 67	-	-	M8/10	109	94	54	20 x 1,50	22
334 3 071	70 - 73	-	-	M8/10	117	104	59	20 x 1,50	22
334 3 078	74 - 80	2½	65	M8/10	122	108	61	20 x 1,50	22
334 3 086	81 - 86	-	-	M8/10	129	116	65	20 x 2,00	43
334 3 092	83 - 91	3	80	M8/10	136	122	68	20 x 2,00	43
334 3 106	101 - 106	-	-	M8/10	152	135	74	23 x 2,00	75
334 3 116	108 - 114	4	100	M8/10	157	144	79	23 x 2,00	75C
334 3 130	125 - 132	-	-	M8/10	176	162	88	23 x 2,00	75
334 3 135	131 - 135	-	-	M8/10	178	165	90	23 x 2,00	75
334 3 141	136 - 139	5	125	M8/10	182	168	91	23 x 2,00	75
334 3 168	159 - 168	6	150	M8/10	232	202	107	25 x 3,00	1.2
334 3 200	193 - 200	-	-	M8/10	268	238	125	25 x 3,00	1.2
334 3 212	210 - 212	-	-	M8/10	275	243	128	25 x 3,00	1.2
334 3 220	216 - 220	8	200	M8/10	283	251	132	25 x 3,00	1.22

## BIS Bifix (M8/M10)

Part No.	D	D	DN	G	B	H	h	b x s	Fa,z
300 3 022	18 - 22	¼	15	M8/10	55	40	28	20 x 1,25	39
300 3 030	26 - 30	¼	20	M8/10	63	48	32	20 x 1,25	39
300 3 034	32 - 34	1	25	M8/10	68	53	34	20 x 1,25	39
300 3 042	38 - 42	1½	32	M8/10	75	60	38	20 x 1,25	39
300 3 051	47 - 51	1½	40	M8/10	83	68	41	20 x 1,25	39
300 3 060	54 - 60	-	-	M8/10	92	77	46	20 x 1,25	39
300 3 064	58 - 62	2	50	M8/10	99	82	49	20 x 2,00	1.0
300 3 068	62 - 68	-	-	M8/10	102	87	51	20 x 2,00	1.03
300 3 070	67 - 70	-	-	M8/10	107	90	53	20 x 2,00	1.0
300 3 074	73 - 77	2½	65	M8/10	114	96	56	23 x 1,50	1.0
300 3 076	72 - 76	2½	65	M8/10	109	94	55	20 x 2,00	1.0
300 3 085	79 - 85	-	-	M8/10	117	102	59	23 x 1,50	1.0
300 3 089	85 - 89	3	80	M8/10	123	108	61	23 x 1,50	1.0
300 3 094	90 - 94	-	-	M8/10	129	110	64	23 x 1,50	1.0
300 3 105	100 - 105	-	-	M8/10	144	128	69	23 x 1,50	1.0
300 3 111	106 - 111	-	-	M8/10	144	128	72	23 x 1,50	1.0
300 3 118	110 - 118	4	100	M8/10	153	138	77	23 x 2,00	1.4
300 3 125	118 - 125	-	-	M8/10	160	144	80	23 x 2,00	1.4
300 3 127	122 - 127	-	-	M8/10	162	146	81	23 x 2,00	1.45
300 3 134	129 - 134	-	-	M8/10	169	153	84	23 x 2,00	1.4
300 3 144	139 - 144	5	125	M8/10	183	167	89	23 x 2,00	1.4
300 3 151	146 - 151	-	-	M8/10	187	171	90	23 x 2,00	1.4
300 3 155	150 - 155	-	-	M8/10	191	175	95	23 x 2,00	1.4
300 3 162	157 - 162	-	-	M8/10	196	180	98	23 x 2,00	1.45
300 3 169	164 - 169	6	150	M8/10	203	187	101	23 x 2,00	1.45
300 3 180	172 - 180	-	-	M8/10	233	200	108	25 x 3,00	4
300 3 190	180 - 190	-	-	M8/10	246	213	114	25 x 3,00	4
300 3 200	190 - 200	-	-	M8/10	256	223	119	25 x 3,00	4

## Britclips Blem Clips



Code	A	h	Fa,z
	(mm)	(mm)	(N)
BC125	2-4	21	72
BC125	2-4	21	72
BC250	5-9	23	90
BC250	5-9	23	90
BC500	10-16	29	900
BC500	10-16	29	90
BC750	17-20	34	90
BC750	17-20	34	90C
BC1000	23-30	40	90C

## Britclips T Bar/Twist On (AC)

Code	G	B	Fa,z
		(mm)	(N)
AC15	M6 x 16 mm	15	220
AC25	M6 x 16 mm	25	220
AC25	M6 x 16 mm	25	22C
AC25-2	M6 x 51 mm	25	22C

## Britclips Purlin Clamp

Code	Fa,z
	(N)
HPC1	200

## Britclips Purlin Clip

Code	Fa,z
	(N)
HPC2	200

## Britclips Purlin Clip Threaded Rod Hangers

Code	R	Fa,z
		(N)
HPC6MT	M6	20C
HPC8MT	M8	200
HPC10MT	M10	20C
HPC12P	Ø 11,0 mm	200

## Britclips Vertical Flange Clips

Code	A	H	Fa,z
	(mm)	(mm)	(N)
VF1	1 - 5	39	720
VF1	1 - 5	39	720
VF2	5 - 7	40	720

## Britclips Cable Run Clips Flange 4 - 12mm



Code	D	A
	(mm)	(mm)
CR25	4,5 - 5,5	2-4
CR26	6,0 - 7,0	2-4
CR27	7,0 - 9,0	2-4
CR210	10,0 - 11,0	2-4
CR212	12,0 - 14,0	2-4
CR215	15,0 - 18,0	2-4
CR219	19,0 - 24,0	2-4
CR225	25,0 - 30,0	2-4
CR45	4,5 - 5,5	4-7
CR46	6,0 - 7,0	4-7
CR47	7,0 - 9,0	4-7
CR410	10,0 - 11,0	4-7
CR412	12,0 - 14,0	4-7
CR415	15,0 - 18,0	4-7
CR419	19,0 - 24,0	4-7
CR425	25,0 - 30,0	4-7
CR85	4,5 - 5,5	8 - 12
CR86	6,0 - 7,0	8 - 12
CR86	6,0 - 7,0	8 - 12
CR87	7,0 - 9,0	8 - 12
CR87	7,0 - 9,0	8 - 12
CR810	10,0 - 11,0	8 - 12
CR810	10,0 - 11,0	8 - 12
CR812	12,0 - 14,0	8 - 12
CR812	12,0 - 14,0	8 - 12
CR815	15,0 - 18,0	8 - 12
CR815	15,0 - 18,0	8 - 12
CR819	19,0 - 24,0	8 - 12
CR819	19,0 - 24,0	8 - 12
CR825	25,0 - 30,0	8 - 12
CR825	25,0 - 30,0	8 - 12
CRA		12 - 20
CRA fits	CR25 - CR225	

## Britclips Support Clips



Code	D	A	R	Fa,z
	(mm)	(mm)		(N)
SC500	16	4 - 7	M6	45C
SC750	16 - 20	6 - 9	M6 -	45C
SC750	16 - 20	6 - 9	M6 -	450
SC1000	25 / 16 - 20	6 - 9	M6 -	450
SC1000	25 / 16 - 20	6 - 9	M6 -	450
SC1250	32 / 25 - 32	6 - 9	M6 -	450

## Britclips Purlin Hangers

Code	H	Fa,z
	(mm)	(N)
ZP1	48	45C
ZP2	41	450

## Britclips Purlin Threaded Rod Hangers

Code	R	Fa,z
		(N)
ZP6MT	M6	45C
ZP8MT	M8	45C
ZP10MT	M10	45C
ZP12P	Ø 11 mm	45C



## Lindapter Accessories and Fixings

Available from stock and on request



**Multiwedge 2 - MW2**

Size	Code
M06	MW06
M08	MW08
M10	MW10



**Flange Clamp - FL**

Size	Code
M06	FL16D
M08	FL18D
M10	FL210D
M12	FL312D



**Alphawedge - AW**

Size	Code
M06	AW06
M08	AW08
M10	AW10



**Swivel Flange Clamp - FLS**

Size	Code
M08	FLS08
M10	FLS10



**Toggle Clamp - TC**

Size	Code
M08	TC08
M10	TC10



**Swivel Attachment - SW**

Size	Code
M10	SW10



**V Nut - VN**

Size	Code
M06	VN06
M08	VN08
M10	VN10



**Purlin Clip**

Size
M10



**TR60 Wedge**

Size	Code
M06	TR6006
M08	TR6008
M10	TR6010



**Hemispherical Cup & Washer**

Size	Code
M10	HC10
M12	HC12
M16	HC16
M20	HC20
M24	HC24
M30	HC30

## H-Frame & Roof Support Systems



The H-Frame is an innovative system to support small and large ducting, pipe work or electrical containment.

The competitively priced H-Frame comes in the form of a kit comprising of

- 2x BF350 305 Feet
- 2x Anti vibration Pads
- 2x N2484 angle brackets
- 4x N10X30 S 10x30 bolts
- 4x NL10 P long spring channel nuts

**Part Number; BF305/HKIT**

*Channel Sold Separately, can be cut to order*

**Individual Feet BF350**

## Flexi-Feet

The FLEXI Foot with strut comes in four sizes 250mm, 400mm, 600mm and 1000mm. They are manufactured from heavy duty recycled rubber and come complete with 21mm x 41mm galvanised steel strut adhered to the rubber with industrial adhesive. The rubber is strong and durable with drain slots moulded into the underside to allow standing water to flow under the foot.



**FF-250-S**



**FLEXI Foot with 250mm strut**

**FF-400-S**



**FLEXI Foot with 400mm Strut**

**FF-600-S**



**FLEXI Foot with 600mm strut**

**FF-1000-S**



**FLEXI Foot with 1000mm strut**

## Fixings



Threaded Rod

	BZP	HDG
6mm	TR06	
8mm	TR08/NCM	TR08/HDG
10mm	TR10/NCM	TR10/HDG
12mm	TR12/NCM	TR12/HDG

Cut lengths of threaded rod available on request

Fixings are available in BZP & HDG from stock  
Add 'HDG' to the end of the part numbers listed



Threaded Rod Coupler

Size	Code
M06	RC06
M08	RC08
M10	RC10
M12	RC12



Threaded Rod End Caps

Size	Code
M06	TR06/EC
M08	TR08/EC
M10	TR10/EC
M12	TR12/EC



Channel End Caps

	41x41mm	41x21mm
Black	N1/B	N3/B
White	N1/W	N3/W



Channel Nuts

	Plain/ No Spring		Short Spring		Long Spring	
	BZP	HDG	BZP	HDG	BZP	HDG
6mm	NP06ZP	NP06HG	NS06ZP	NS06HG	NL06ZP	NL06HG
8mm	NP08ZP	NP08HG	NS08ZP	NS08HG	NL08ZP	NL08HG
10mm	NP10ZP	NP10HG	NS10ZP	NS10HG	NL10ZP	NL10HG
12mm	NP12ZP	NP12HG	NS12ZP	NS12HG	NL12ZP	NL12HG



Square Plate Washers

	HDG
6mm	N1062/HDG
8mm	N1082A/HDG
10mm	N1083/HDG
12mm	N1083/12

## Fixings



Hex Head Set Bolts

Size	Length	Code
M06	20mm	N06X25HS
M06	25mm	N06X25HS
M06	40mm	N06X40HS
M06	50mm	N06X50HS
M08	20mm	N08X20HS
M08	25mm	N08X25HS
M08	40mm	N08X40HS
M08	50mm	N08X50HS
M10	20mm	N10X20HS
M10	25mm	N10X25HS
M10	40mm	N10X40HS
M10	50mm	N10X50HS
M12	20mm	N12X20HS
M12	25mm	N12X25HS
M12	40mm	N12X40HS
M12	50mm	N12X50HS

We are now keeping some  
**stainless steel** fixings in stock



Roofing Nuts & Bolts

Size	Length	Code
M06	12mm	M6X12RB
M06	16mm	M6X16RB
M06	20mm	M6X20RB
M06	25mm	M6X25RB



Flat Washer

Size	Code
M06	M06FW
M08	M08FW
M10	M10FW
M12	M12FW



Penny Washer

Size	Dia.	Code
M06	25	PW06X25
M08	25	PW08X25
M10	25	PW10X25
M12	25	PW12X25



Hex Nuts

Size	Code
M06	M06HN
M08	M08HN
M10	M10HN
M12	M12HN



Shakeproof Washer

Size	Code
M06	M06SHW
M08	M08SHW
M10	M10SHW
M12	M12SHW



Spring washer

Size	Code
M06	M06SPW
M08	M08SPW
M10	M10SPW
M12	M12SPW



Wedge Nuts

Size	Code
M06	WN06
M08	WN08
M10	WN10
M12	WN12

## Notes

## Notes

## Notes

## Notes